




Material



Material:	Body Nickel plated
Seal:	PA6 Sealing NBR
Protection Degree:	Using suitable O-Sealing within clamping range ist protection degree can reach IP68
Properties:	Succeed in the experiment of IEC-60077-1999 resistance to vibration and impact
Temperature Range:	Stat. Min. -40°C max 100°C Short-term 120°C Dynam. Min. -20°C max 80°C Short-term 100°C
Note:	According to customer demand for custom ROHS trough the joint certification of products

Technical Drawing

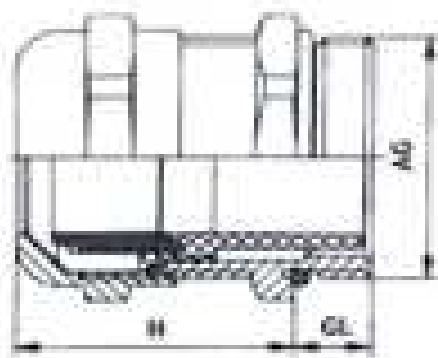

Metal Cable Gland M Thread Standard Length Thread

Part No.: **231001**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.06.2007
APPD:	Join			FINISH	Shieh	Sheet	1 from 2

Copyright by EDCON-COMPONENTS H.Schmitt 20.6.2008



Dimension Table

Size	Thread	Clamping	Thread	Thread	Wrench	Packing
	Dimension	Range (mm)	AG (mm)	Length (mm)	Size (mm)	units
M12A	M12x1,5	3 ~ 6,5	12	5	14	50
M16A	M16x1,5	2 ~ 6	16	6	18	50
M16B	M16x1,5	4 ~ 8	16	6	18	50
M16C	M16x1,5	5 ~ 10	16	6	20	50
M18A	M18x1,5	5 ~ 10	18	6	20	50
M20A	M20x1,5	5 ~ 9	20	7	22	50
M20B	M20x1,5	6 ~ 12	20	7	22	50
M20C	M20x1,5	8 ~ 14	20	7	24	50
M22A	M22x1,5	8 ~ 14	22	7	24	50
M24A	M24x1,5	7 ~ 12	24	7	27	50
M24B	M24x1,5	8 ~ 14	24	7	27	50
M25A	M25x1,5	8 ~ 14	25	7	28	25
M25B	M25x1,5	10 ~ 16	25	7	28	25
M25C	M25x1,5	13 ~ 18	25	7	30	25
M27A	M27x2,0	11 ~ 16	27	8	30	25
M27B	M27x2,0	13 ~ 18	27	8	30	25
M30A	M30x2,0	11 ~ 16	30	8	34	25
M30B	M30x2,0	13 ~ 18	30	8	34	25
M32A	M32x1,5	11 ~ 18	32	8	36	20
M32B	M32x1,5	15 ~ 22	32	8	36	20
M32C	M32x1,5	18 ~ 25	32	8	40	20
M33A	M33x2,0	18 ~ 25	33	8	40	20
M36A	M36x2,0	14 ~ 21	36	8	40	20
M36B	M36x2,0	18 ~ 25	36	8	40	20
M40A	M40x1,5	16 ~ 25	40	9	45	20
M40B	M40x1,5	21 ~ 30	40	9	45	20
M40C	M40x1,5	22 ~ 32	40	9	50	10
M42A	M42x2,0	22 ~ 32	42	9	50	10
M48A	M48x2,0	22 ~ 32	48	9	55	10
M50A	M50x1,5	30 ~ 38	50	9	55	10
M56A	M56x2,0	30 ~ 38	56	9	60	10
M60A	M60x2,0	37 ~ 44	60	10	65	5
M63A	M63x1,5	37 ~ 44	63	10	70	5
M63B	M63x1,5	42 ~ 53	63	10	75	5
M64A	M64x2,0	37 ~ 44	63	10	70	5

Ordering Information

Serie	Size	ROHS	Packing				
231001	M12A	R	B05				
Look dimension table		R= ROHS Conform	B05= 50PCS in one Poly Bag look Packing units	Metal Cable Gland M Thread Standard Length Thread			
		0= NON ROHS					
				Part No.:	231001		
				Customer:			
DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.06.2007
APPD:	Join			FINISH	Shieh	Sheet	2 from 2

