




Material



Material:	Body Nickel plated
Seal:	PA6 Sealing NBR
Protection Degree:	Using suitable O-Sealing within clamping range ist protection degree can reach IP68
Properties:	Succeed in the experiment of IEC-60077-1999 resistance to vibration and impact
Temperature Range:	Stat. Min. -40°C max 100°C Short-term 120°C Dynam. Min. -20°C max 80°C Short-term 100°C
Note:	According to customer demand for custom ROHS trough the joint certification of products

Technical Drawing

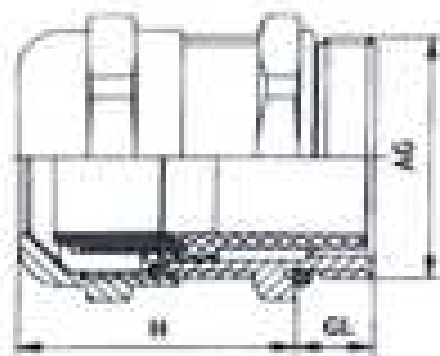

Metal Cable Gland PG Thread Standard Length Thread

Part No.: **231004**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.05.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 2

Copyright by EDCON-COMPONENTS H.Schmitt 20.6.2008



Dimension Table

Size	Thread	Clamping	Thread	Thread	Wrench	Packing
	Dimension	Range (mm)	AG (mm)	Length (mm)	Size (mm)	units
PG7A	PG7	3 ~ 6,5	12,5	10	14	50
PG9A	PG9	2 ~ 6	15,2	10	17	50
PG9B	PG9	4 ~ 8	15,2	10	17	50
PG11A	PG11	5 ~ 10	18,6	10	20	50
PG13,5A	PG13,5	5 ~ 9	20,4	10	22	50
PG13,5B	PG13,5	6 ~ 12	20,4	10	22	50
PG16A	PG16	7 ~ 12	22,5	10	24	50
PG16B	PG16	8 ~ 14	22,5	10	24	50
PG21A	PG21	11 ~ 16	28,3	12	30	25
PG21B	PG21	13 ~ 18	28,3	12	30	25
PG29A	PG29	14 ~ 21	37	12	40	20
PG29B	PG29	18 ~ 25	37	12	40	20
PG36A	PG36	22 ~ 32	47	15	50	10
PG42A	PG42	30 ~ 38	54	15	60	10
PG48A	PG48	37 ~ 44	59,3	15	65	5

Ordering Information

Serie	Size	ROHS	Packing				
231004	PG7A	R	B05				
Look dimension table		R= ROHS Conform	B05= 50PCS in one Poly Bag look Packing units			Metal Cable Gland PG Thread Standard Length Thread	
		0= NON ROHS					
					Part No.:	231004	
					Customer:		
DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.05.2009
APPD:	Join			FINISH	Shieh	Sheet	2 from 2

