




Material



Material:	Body Nickel Brass plated
Seal:	PA6 Sealing NBR
Protection Degree:	Using suitable O-Sealing within clamping range ist protection degree can reach IP68
Properties:	Succeed in the experiment of IEC-60077-1999 resistance to vibration and impact
Temperature Range:	Stat. Min. -40°C max 100°C Short-term 120°C Dynam. Min. -20°C max 80°C Short-term 100°C
Note:	According to customer demand for custom ROHS through the joint certification of products

Technical Drawing

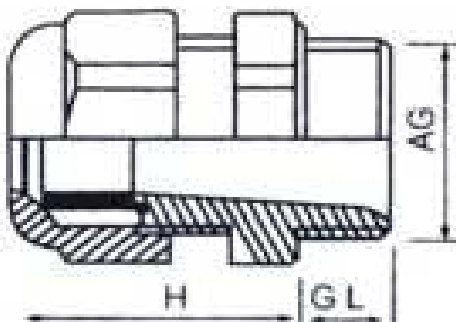

Metal Cable Gland M Thread Multi-apertured

Part No.: **231011**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.06.2007
APPD:	Join			FINISH	Shieh	Sheet	1 from 2

Copyright by EDCON-COMPONENTS H.Schmitt 20.6.2008



Dimension Table

[illegible]

Ordering Information

Serie		Size		ROHS	Packing		
231011		PG21A		R	B05		
Look dimension table		R= ROHS Conform		B05= 50PCS in one Poly Bag look Packing units		Metal Cable Gland M Thread Multi-apertured Part No.: 231011 Customer:	
		0= NON ROHS					
DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.06.2007
APPD:	Join			FINISH	Shieh	Sheet	2 from 2

