




Material



Material:	Nickel plated Brass
Protection degree:	Using suitable O-Sealings within the clamping range the protection degree can reach IP68
Properties:	succeed in the experiment of IEC-60077-1999 resistance to vibration and impact.
Temperature Range:	Stat.: Min -40°C to Max. 100°C Short-term 120°C Dyn.: Min -20°C to Max. 80°C Short-term 120°C
Note:	According to customer demand for custom ROHS through the joint certification of products.

Technical Drawing

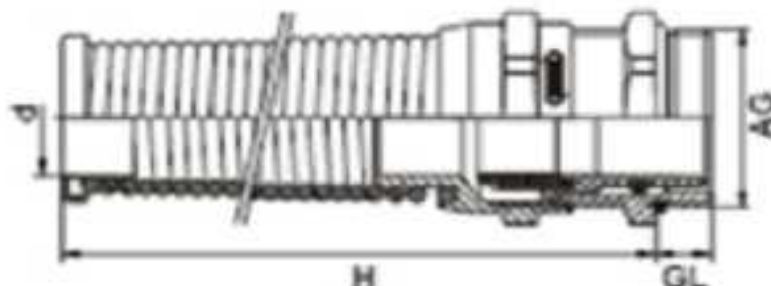

Protection Metal Cable Gland

Part No.: **231012**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.06.2007
APPD:	Join			FINISH	Shieh	Sheet	1 from 2

Copyright by EDCON-COMPONENTS H.Schmitt 20.6.2008

