





Material

Material: PA6,
 Seal: Sealing NBR
 Protection Degree: Using suitable O-Sealing within clamping range 1st protection degree can reach IP68
 Temperature Range: Stat. Min. -40°C max 100°C Short-term 120°C
 Dynm. Min. -20°C max 80°C Short-term 100°C
 Note: According to the special needs of thread, V0 level joint product
 Delivery without: Lock Nut,
 Delivery with: Washer



Nut to this cable Gland Serie you find it here: [231032](#)

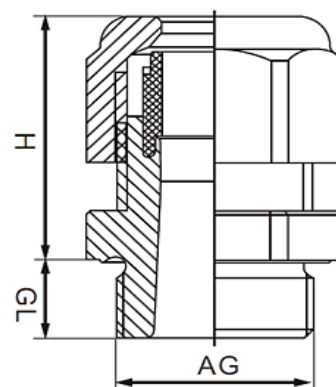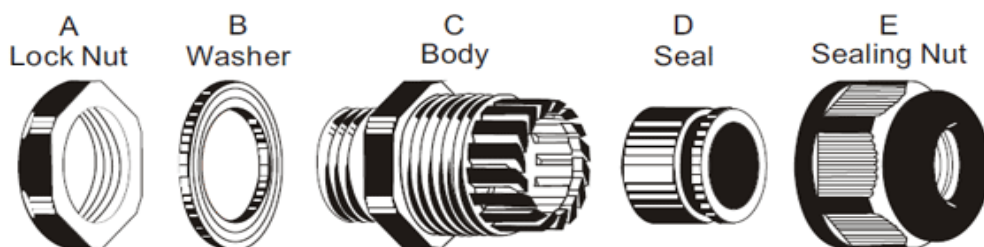

Dimension Table

Ordering Size	Thread Dimension	Clamping Range (mm)	Thread AG (mm)	Thread Length (mm)	Wrench Size (mm)	Hole AG (mm)	Packing units
M10A	M10x1	3 ~ 6,5	10	8	15	10	100
M12A	M12x1,5	3 ~ 6,5	12	8	15	12	100
M12B	M12x1,5	2 ~ 5	12	8	15	12	100
M14A	M14x1,5	4 ~ 8	14	8	15	14	100
M14B	M14x1,5	2 ~ 6	14	8	15	14	100
M16A	M16x1,5	2 ~ 6	16	8	19	16	100
M16B	M16x1,5	4 ~ 8	16	8	19	16	100
M16C	M16x1,5	5 ~ 10	16	8	22	16	100
M16D	M16x1,5	3 ~ 7	16	8	22	16	100
M18A	M18x1,5	5 ~ 10	18	8	22	18	100
M18B	M18x1,5	3 ~ 7	18	8	22	18	100
M20A	M20x1,5	5 ~ 10	20	9	24	20	100
M20B	M20x1,5	6 ~ 12	20	9	24	20	100
M20C	M20x1,5	8 ~ 14	20	9	27	20	50
M20D	M20x1,5	10 ~ 14	20	9	27	20	50
M20E	M20x1,5	4 ~ 7	20	9	27	20	50

**Nylon Cable Gland M
Thread Standard Thread
Length**

Part No.: **231024**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	1 from 3

Copyright by S.Tiede



Dimension Table

Size	Thread	Clamping	Thread	Thread	Wrench	Hole	Packing
	Dimension	Range (mm)	AG (mm)	Length (mm)	Size (mm)	AG (mm)	units
M22A	M22x1,5	7 ~ 12	22	10	27	22	50
M22B	M22x1,5	8 ~ 14	22	10	27	22	50
M24A	M24x1,5	7 ~ 12	24	10	27	24	50
M24B	M24x1,5	8 ~ 14	24	10	27	24	50
M24C	M24x1,5	11 ~ 16	24	10	30	24	50
M25A	M25x1,5	11 ~ 16	25	11	33	25	50
M25B	M25x1,5	13 ~ 18	25	11	33	25	50
M27A	M27x1,5	11 ~ 16	27	11	33	27	50
M27B	M27x1,5	13 ~ 18	27	11	33	27	50
M30A	M30x1,5	11 ~ 16	30	11	33	30	50
M30B	M30x1,5	13 ~ 18	30	11	33	30	50
M30C	M30x1,5	14 ~ 21	30	11	37	30	50
M32A	M32x1,5	14 ~ 21	32	11	42	32	25
M32B	M32x1,5	18 ~ 25	32	11	42	32	25
M32C	M32x1,5	13 ~ 20	32	11	42	32	25
M32D	M32x1,5	12 ~ 21	32	11	42	32	25
M33A	M33x1,5	18 ~ 25	33	11	42	33	25
M36A	M36x1,5	14 ~ 21	36	11	42	36	25
M36B	M36x1,5	18 ~ 25	36	11	42	36	25
M40A	M40x1,5	22 ~ 32	40	13	52	40	10
M40B	M40x1,5	20 ~ 26	40	13	52	40	10
M42A	M42x1,5	22 ~ 32	42	13	52	42	10
M48A	M48x1,5	22 ~ 32	48	13	52	48	10
M50A	M50x1,5	30 ~ 38	50	14	60	50	10
M50B	M50x1,5	25 ~ 31	50	14	60	50	10
M56A	M56x1,5	30 ~ 38	56	14	65	56	10
M60A	M60x1,5	37 ~ 44	60	15	65	60	10
M63A	M63x1,5	37 ~ 44	63	15	65	63	10
M63B	M63x1,5	29 ~ 35	63	15	65	63	10
M64A	M64x1,5	37 ~ 44	64	15	65	64	10
M72A	M72x2,0	53 ~ 60	72	25	82	72	4
M72B	M72x2,0	48 ~ 55	72	25	82	72	4

**Nylon Cable Gland M
Thread Standard Thread
Length**

Part No.: **231024**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	2 from 3

Copyright by S.Tiede



Dimension Table

Size	Thread Dimension	Clamping Range (mm)	Thread AG (mm)	Thread Length (mm)	Wrench Size (mm)	Hole AG (mm)	Packing units

Ordering Information

Serie	O.-Size	Color	ROHS	Packing	
231024	M12A	7035	R	BU	

Look dimension table	7001 =Silver Gray	R = ROHS Conform 0 = NON ROHS	BU = Bulk- Ware into Poly Bag
	7035 = Light Gray		
	9005 = Black		
	5015 = Blue		
	9003 = White		
	3020 = Red		



Nylon Cable Gland M Thread Standard Thread Length	
Part No.:	231024
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	3 from 3

Copyright by S.Tiede