




Material



Material:	PA6,
Seal:	Sealing NBR
Protection Degree:	Using suitable O-Sealing within clamping range ist protection degree can reach IP68
Temperature Range:	Stat. Min. -40°C max 100°C Short-term 120°C Dynam. Min. -20°C max 80°C Short-term 100°C
Note:	According to the special needs of thread, V0 level joint product

Technical Drawing

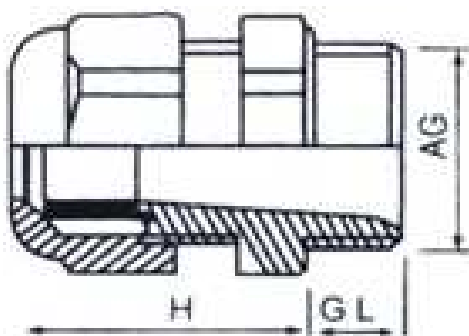

Nylon Cable Gland PG Thread; Standard Length

Part No.: **231026**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	1 from 2

Copyright by S.Tiede



Dimension Table

Size	Thread	Clamping	Thread	Thread	Wrench	Packing
	Dimension	Range (mm)	AG (mm)	Length (mm)	Size (mm)	units
PG07A	PG7	3 ~ 6,5	12,5	8	15	100
PG09A	PG9	2 ~ 6	15,2	8	19	100
PG09B	PG9	4 ~ 8	15,2	8	19	100
PG11A	PG11	5 ~ 10	18,6	8	22	100
PG13A	PG13,5	5 ~ 9	20,4	9	24	100
PG13B	PG13,5	6 ~ 12	20,4	9	24	100
PG16A	PG16	7 ~ 12	22,5	10	27	50
PG16B	PG16	8 ~ 14	22,5	10	27	50
PG21A	PG21	11 ~ 16	28,3	11	33	50
PG21B	PG21	13 ~ 18	28,3	11	33	50
PG29A	PG29	14 ~ 21	37	11	42	25
PG29B	PG29	18 ~ 25	37	11	42	25
PG36A	PG36	22 ~ 32	47	13	52	10
PG42A	PG42	30 ~ 38	54	14	60	10
PG48A	PG48	37 ~ 44	59,3	15	65	5

Ordering Information

Serie	Size	Color	ROHS	Packing	
231026	-	PG07A	7035	R	BU

Look dimension table	7001 =Silver Gray	R = ROHS Conform	BU = Bulk-Ware into Polybag
	7035 = Light Gray	N = NON ROHS	
	9005 = Black		
	5015 = Blue		
	9003 = White		
	3020 = Red		



Nylon Cable Gland PG Thread; Standard Length

Part No.: **231026**
Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	2 from 2

Copyright by S.Tiede