




Material



Material: PA6,
 Seal: Sealing NBR
 Protection Degree: Using suitable O-Sealing within clamping range ist protection degree can reach IP68
 Temperature Range: Stat. Min. -40°C max 100°C Short-term 120°C
 Dyn. Min. -20°C max 80°C Short-term 120°C
 Note: According to the special needs of thread, V0 level joint product

Technical Drawing

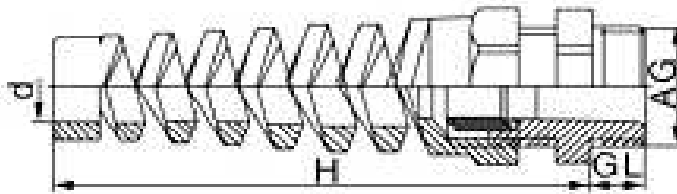

**Plastic Cable Gland; M
Thread; with Strain Relief**

Part No.: **231053**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	30.09.2014
APPD:	Join			FINISH	Shieh	Sheet	1 from 2

Copyright by S.Tiede



Dimension Table

Size	Thread	Clamping	Thread	Thread	Wrench	Total
	Dimension	Range (mm)	AG (mm)	Length (mm)	Size (mm)	Length (H)
M12A	M12x1,5	3 ~ 6,5	12	8	16/17	65
M12B	M12x1,5	2 ~ 5	12	8	16/17	65
M16A	M16x1,5	4 ~ 8	16	8	19/20	70
M16B	M16x1,5	2 ~ 6	16	8	19/20	70
M18A	M18x1,5	5 ~ 10	18	8	22	78
M18B	M18x1,5	3 ~ 7	18	8	22	78
M20A	M20x1,5	6 ~ 12	20	9	24	90
M20B	M20x1,5	5 ~ 9	20	9	24	90
M22A	M22x1,5	10~14	22	10	27	100
M22B	M22x1,5	7~12	22	10	27	100
M25A	M25x1,5	13~18	25	10	33/34	112
M25B	M25x1,5	9~16	25	10	33/34	112
M27A	M27x1,5	13~18	27	10	33/34	112
M27B	M27x1,5	9~16	27	10	33/34	112

Ordering Information

Serie	Size	Color	ROHS	Packing	Packing Information
231053	M12A	GY	R	B01	A
Look dimension table	GY= Gray	R= ROHS Conform	B01= 10PCS in one Poly Bag look Packing units	A= with mounted nut	
	BK= Black	0= NON ROHS		B= without mounted Nut	
	WH= White				

Plastic Cable Gland; M Thread; with Strain Relief

Part No.: 231053

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	30.09.2014
APPD:	Join			FINISH	Shieh	Sheet	2 from 2

