





Material

Material: PA66,
 Seal: Sealing NBR
 Protection Degree: Using suitable O-Sealing within clamping range 1st protection degree can reach IP68
 Temperature Range: Stat. Min. -40°C max 100°C Short-term 120°C
 Dynm. Min. -20°C max 80°C Short-term 100°C
 Note: According to the special needs of thread, V0 level joint product
 Delivery without: Lock Nut,
 Delivery with: Washer



Nut to this cable Gland Serie you find it here: [231032](#)

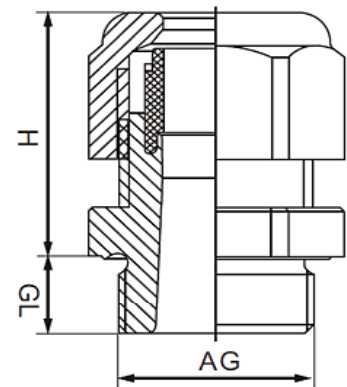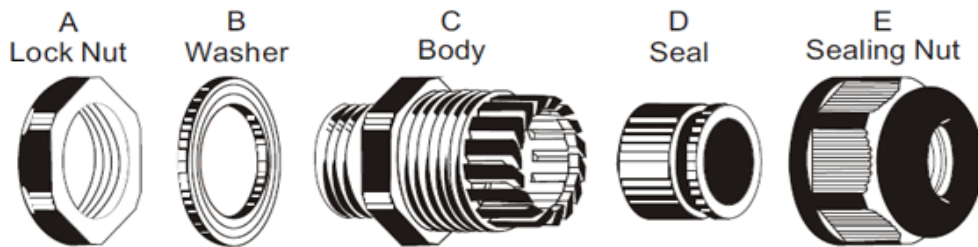

Dimension Table

Ordering Size	Thread Dimension	Clamping Range (mm)	Thread AG (mm)	Thread Length (mm)	Spanner (mm)	Packing units
NPT3/8A	3/8	6 ~ 10	16,662	10	22	
NPT3/8B	3/8	4 ~ 7	16,662	10	22	
NPT1/2A	1/2	7 ~ 12	20,955	10	24	
NPT1/2B	1/2	5 ~ 9	20,955	10	24	
NPT3/4A	3/4	12 ~ 18	26,441	15	33	
NPT3/4B	3/4	11 ~ 16	26,441	15	33	
NPT1A	1	18 ~ 25	33,2	17	42	
NPT1B	1	16 ~ 22	33,2	17	42	
NPT1-1/4A	1/1/4	24 ~ 32	41,984	17	52	
NPT1-1/4B	1/1/4	21 ~ 26	41,984	17	52	

**Nylon Cable Gland Thread
 NPT**

Part No.: **231150**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	20.07.2022
APPD:	Join			FINISH	Shieh	Sheet	1 from 2



Dimension Table

Size	Thread Dimension	Clamping Range (mm)	Thread AG (mm)	Thread Length (mm)	Spanner(mm)		

Ordering Information

Serie	O.-Size	Color	ROHS	Packing	
231150	NPTxx	7035	R	BU	

Look dimension table	7035= Light Gray	R= ROHS Conform	BU= Bulk-Ware into Poly Bag
	9005= Black	0= NON ROHS	



Nylon Cable Gland Thread NPT	
Part No.:	231150
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	20.07.2022
APPD:	Join			FINISH	Shieh	Sheet	2 from 2