
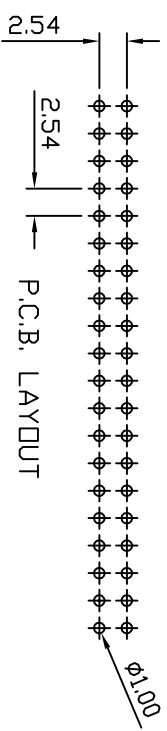
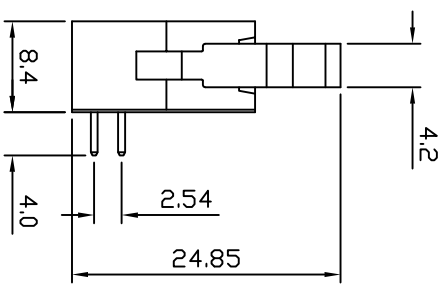
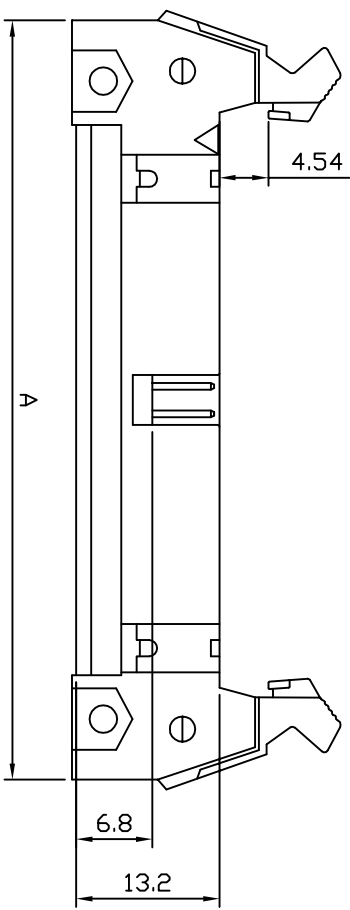


SPECIFICATIONS
 CURRENT RATING: 3 AMPS
 INSULATOR RESISTANCE: 5000 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING: AC 500 V
 OPERATING TEMPERATURE: -40°C~+105°C
 CONTACT MATERIAL: BRASS
 INSULATOR MATERIAL: POLYESTER (UL 94V-0)
 ©STANDARD: P.B.T

PARTS ND.	Poles	A (mm)	B (mm)
BH2-2051211-371	10	32.24	10.16
BH2-2071211-371	14	37.32	15.24
BH2-2081211-371	16	39.86	17.78
BH2-2101211-371	20	44.94	22.86
BH2-2121211-371	24	50.02	27.94
BH2-2131211-371	26	52.56	30.48
BH2-2151211-371	30	57.64	35.56
BH2-2171211-371	34	62.72	40.64
BH2-2201211-371	40	70.34	48.26
BH2-2221211-371	44	75.42	53.34
BH2-2251211-371	50	83.04	60.96
BH2-2301211-371	60	95.74	73.66
BH2-2321211-371	64	100.82	78.74

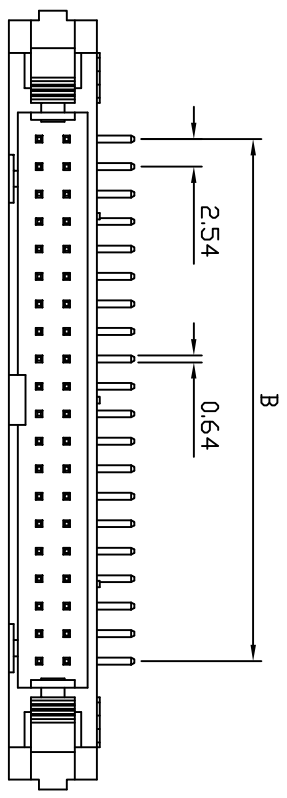

A		8		7		6		5		4		3		2		1	
豪國興業(股)公司		TITLE		勾勾牛角 90度 (短耳)		SCALE		SHEET		1 OF 1		APP. CHK.		L/SA JACKY		GENERAL TOLERANCE UNLESS SPECIFIED	
DWG.NO.		NBHXXR-短耳		UNIT		MM		DR.		DAVID		LINEAR		0.0±0.30		0.00±0.20	
REV		A		±1°													