

EDCON-COMPONENTS



Technical Discription

Aluminium enclosures can use in wide range temperature territory

Aluminium enclosures are highly tolerant to chemicals

Aluminium enclosures can protect against or internal radiated noise (EMS) Electro magnetic shield)

Aluminium enclosures which are resistant to corrosion and sea water, are suited to hazarous, circumstances, such as indoor outdoor, in shore area etc.

Material: Al Si 12, DIN 1725

Protection Degree: Standard: IP66, EN 60529
Flange: IP65, EN 60529

Impact Strength: > 7Nm, EN 50014

.-40°C to +100°C PUR (polyuretahne)
seal, solid foam

Gasket .-40°C to +100°C CR (chloropene) seal,


Temperature Range solid foam (round seal)

.-60°C to +130°C VMQ (silicone) seal,
solid foam (round seal)

Coating: powder-coating

Color: Gray / (RAL7001) order hue possibility

Dimension (mm)							
W1	W2	W3	H1	H2	H3	D1	D2
120	111	82	220	211	204	61	20

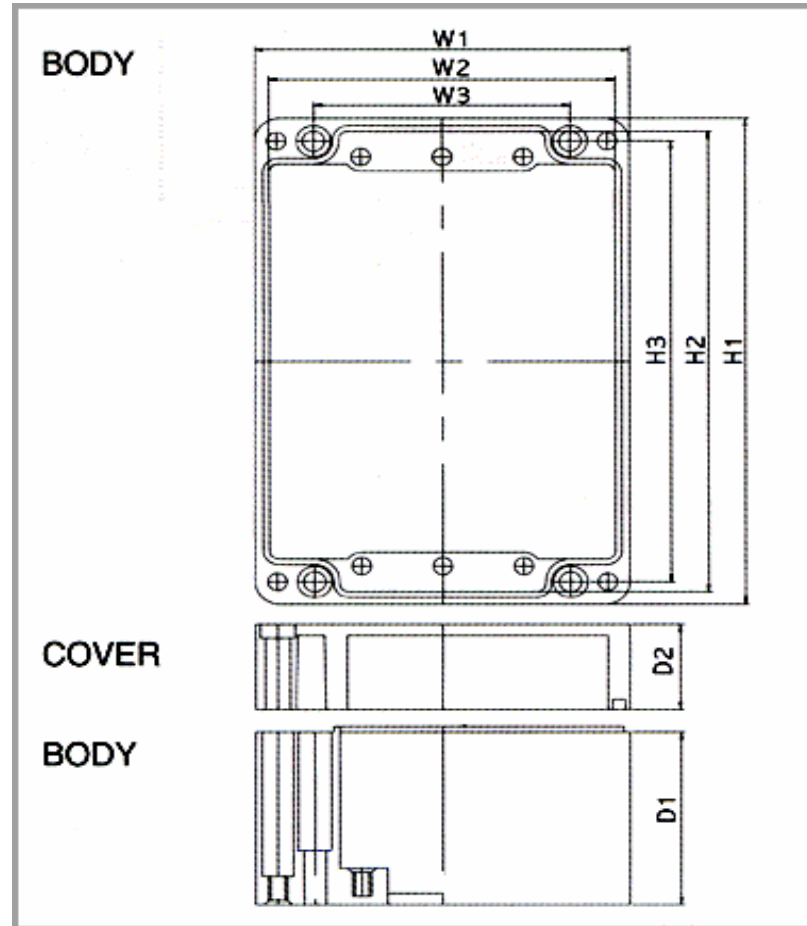

**Aluminium Enclosures
120x220x80mm**

Part No.: **H15017**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2010	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2		

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



[Assesories for Serie H150xx](#)

Ordering Informations

Serie	Material Base	Color Base	ROHS	Packing						
-------	---------------	------------	------	---------	--	--	--	--	--	--

H15017	A	G	R	S						
---------------	----------	----------	----------	----------	--	--	--	--	--	--

A= Aluminium	G= Gray	R= ROHS Conform	S= Standard Packing
		N= NON ROHS Conform	I= Individual Packing

**Aluminium Enclosures
120x220x80mm**

Part No.: **H15017**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2

Customer:

www.edcon-components.com

email: info@edcon-components.com