


EDCON-COMPONENTS

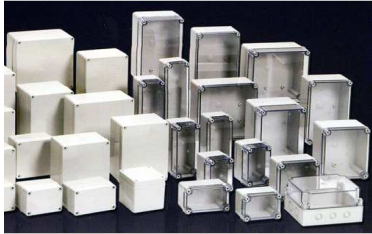

Technical Discription

Temperature Range: ABS= -40°C ~ +85°C

PC= -40°C ~ +120°C

Protection Degree

IP66-67

Plastic boxes screw type

In Injection molding, fastening channel made as one with enclosure's body is superior on strength and is durable without chrushing when you put the screw into channel.

Our enclosure's thickness is strengthened with laying emphasis on protection of electricity-electron components.

They can be used semi-permanently.

Our Enclosure can be used in poor and dangerous industrial circumstances. As we apply shockproof material to our enclosures and make up for structures of our enclosures.



Dimension (mm)												
W1	W2	W3	W4	H1	H2	H3	H4	D1	D2	D3	M1	M2
80	74	62		80	94	62	50	45	15	43	65	65

**Sealed Plastic Enclosure
80 x 80 x 60mm**

Part No.: **H21005**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

Customer:


www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Technical Drawing

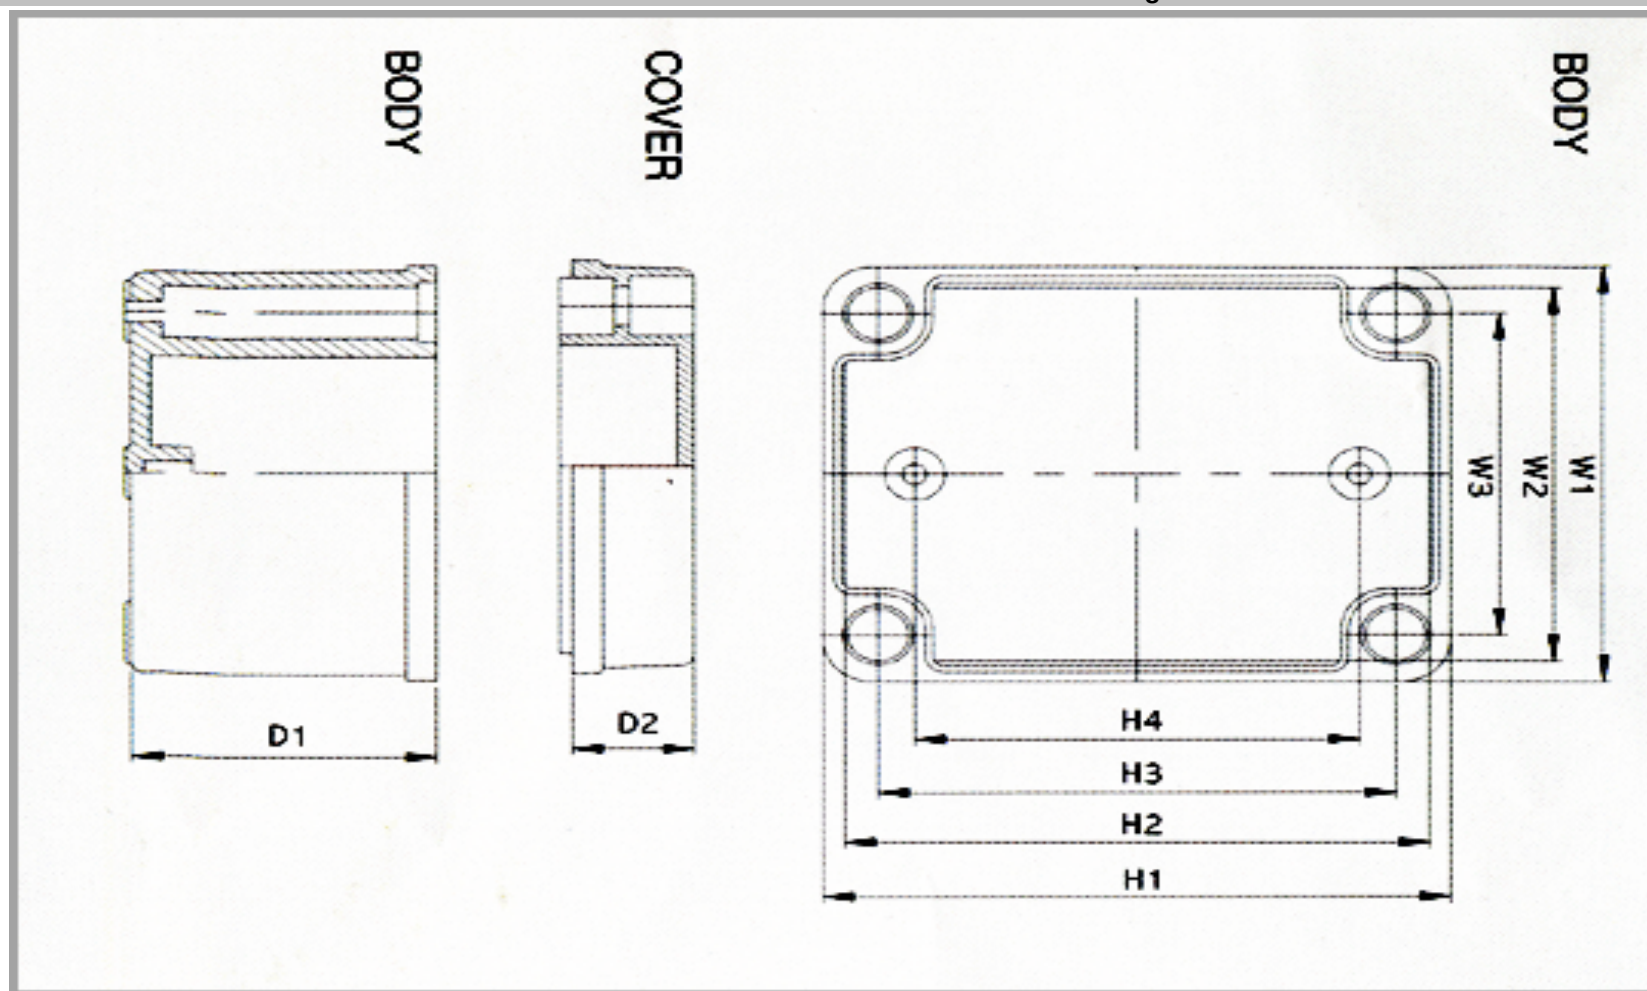

**Sealed Plastic Enclosure
80 x 80 x 60mm**

Part No.: **H21005**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	

www.edcon-components.com

email: info@edcon-components.com

Copyright by EDCON-COMPONENTS



Accessories for Enclosures H210xx Serie

Ordering Informations

Serie	Material Base	Material Cover	Color Base	Color Cover	ROHS	Packing				
-------	---------------	----------------	------------	-------------	------	---------	--	--	--	--

H21005	A	A	G	G	R	S				
---------------	----------	----------	----------	----------	----------	----------	--	--	--	--

A= ABS	A= ABS	G= Gray	G= Gray	R= ROHS Conform	S= Standard Packing
P= Polycar - bonat	P= Polycar - bonat	T= Transparent	T= Transparent	N= NON ROHS Conform	I= Individual Packing

**Sealed Plastic Enclosure
80 x 80 x 60mm**

Part No.: **H21005**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

Customer: