

EDCON-COMPONENTS




Specifications

Current Rating: 0,5A
 Voltage Rating: 50V AC/DC
 Withstanding Voltage: 150V AC f. 1Minute
 Contact Resistance: 50milli Ohm max.
 Insulation Resistance: 100M Ohm min.
 Operating Temperature: . -20°C ~ to +105°C
 Insulator Material: LCP, Plastic UL94V-0 Black


Material + Plating

Contact Pin: Phosphor Bronze
 Contact Plating: like ordering code

P.C.B Layout

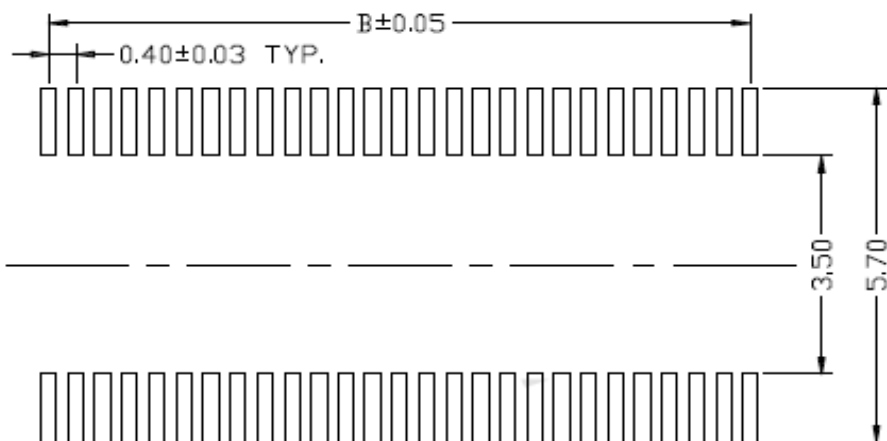

Drawing

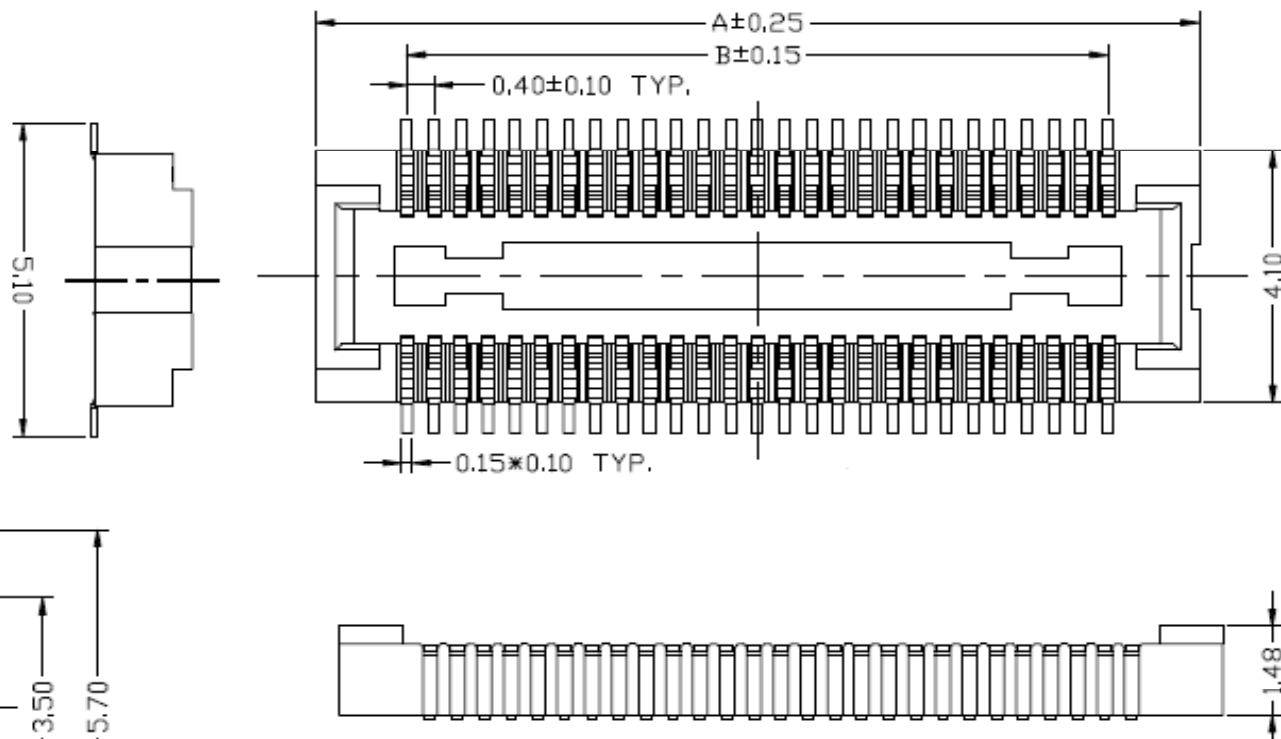

Board to Board Connector
Pitch 0,50mm

Part No.: **T15F002**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.10.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Construction	Contact Plating	Material	Polarisation Peg	Special function	Special function	ROHS	Packing
T15F002	xx	F	G0	PA	Y	N	N	R	TR

XX = like Pos. Table		G0 = Gold Flash		Y = Yes	00 = No special function	00 = No special function	R =ROHS conform	
	F = Female						N =NO ROHS conform	TC = Tube with Cap
			PA = PA9T					
								TR = Tape Reel Packing w. Cap
			T0 = Tin plated					



Board to Board Connector Pitch 0,50mm
Part No.: T15F002
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.10.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile for Lead Soldering

Soldering Profile for Lead Free Soldering

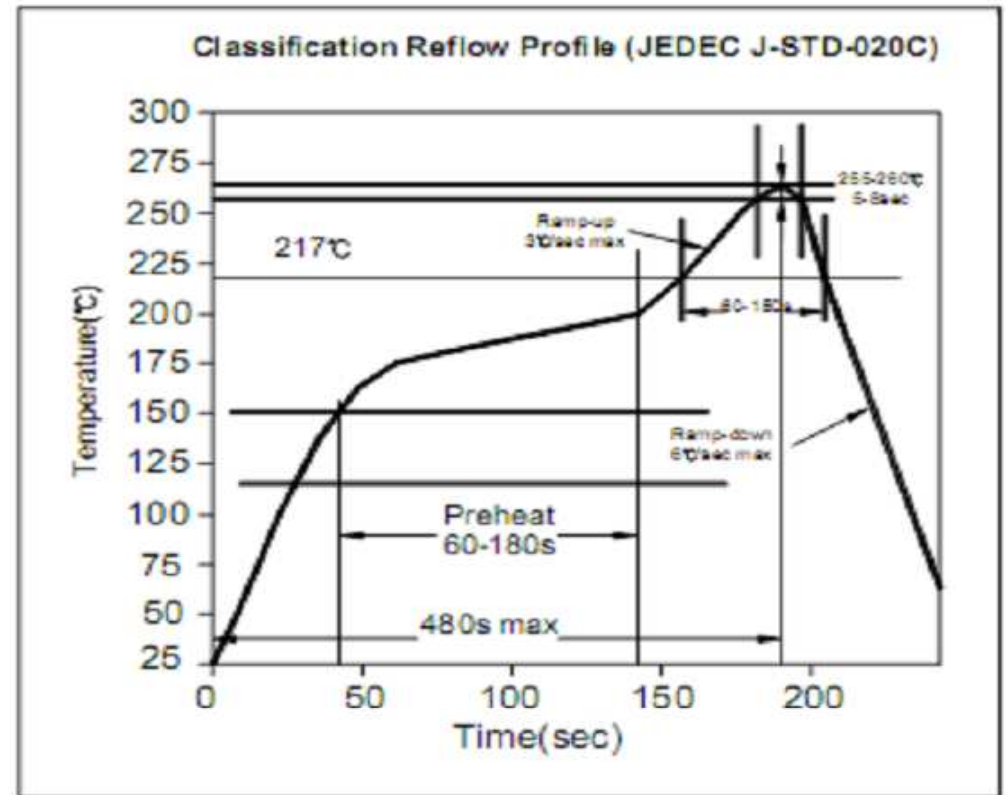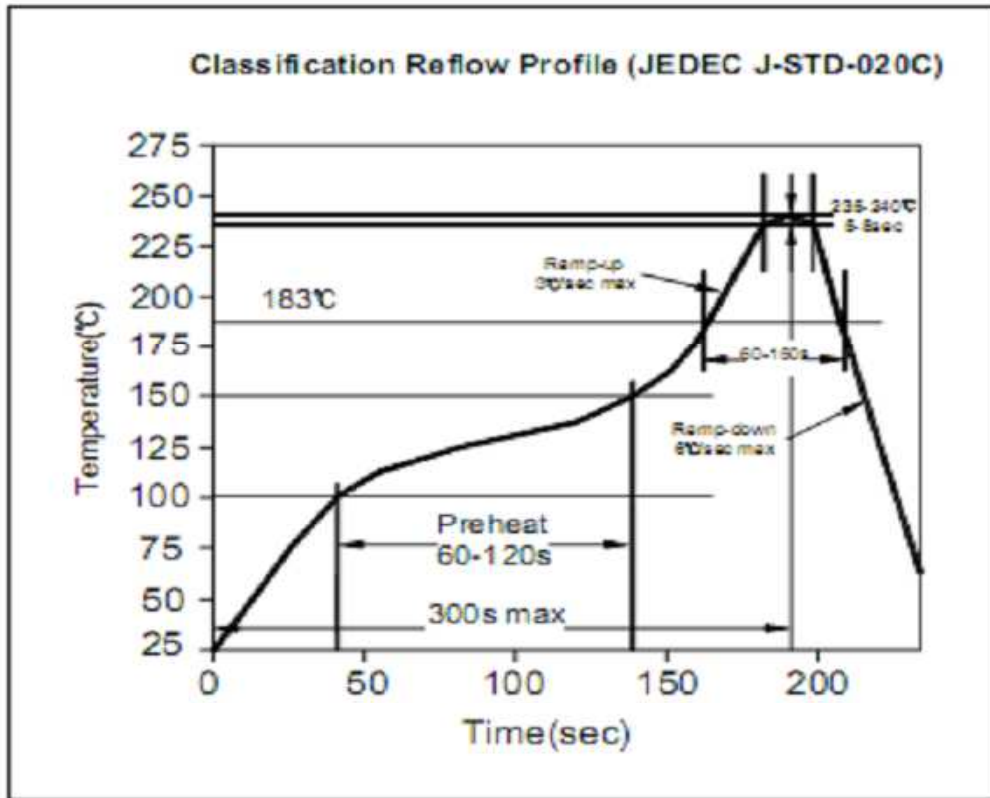

**Board to Board Connector
Pitch 0,50mm**

Part No.: **T15F002**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.10.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	