


# EDCON-COMPONENTS

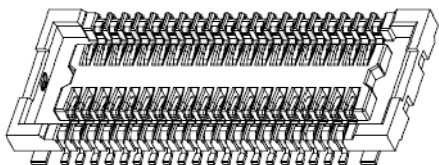


## Specifications

Current Rating: 0,5A  
 Voltage Rating: 50V AC/DC  
 Withstanding Voltage: 150V AC f. 1Minute  
 Contact Resistance: 50milli Ohm max.  
 Insulation Resistance: 100M Ohm min.  
 Operating Temperature: . -20°C ~ to +105°C  
 Insulator Material: LCP, Plastic UL94V-0 Black


## Material + Plating

Contact Pin: Phosphor Bronze  
 Contact Plating: like ordering code

## P.C.B Layout

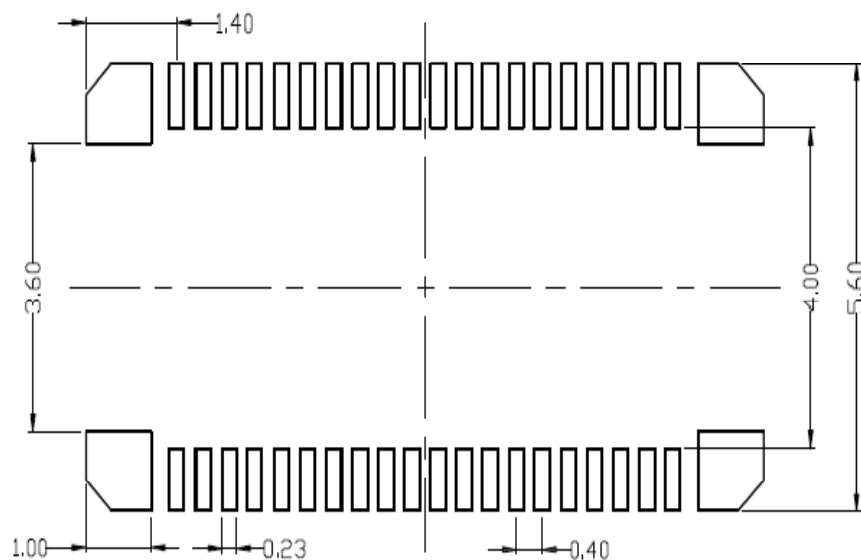

## Drawing

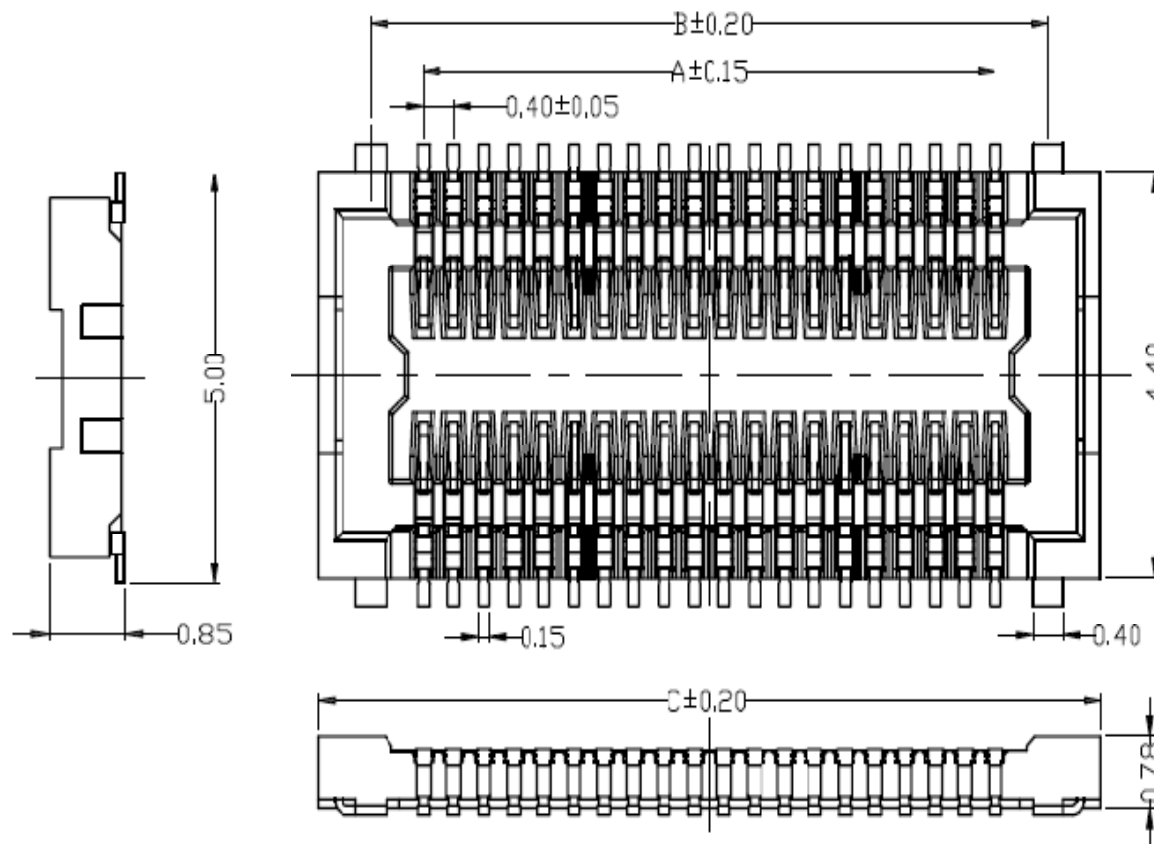

**Board to Board Connector  
 Pitch 0,40mm, H1,0mm**


Part No.: **T15F003**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.10.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	







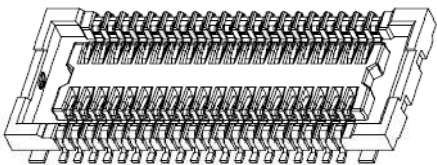

Soldering Profile for Lead Soldering

Soldering Profile for Lead Free Soldering

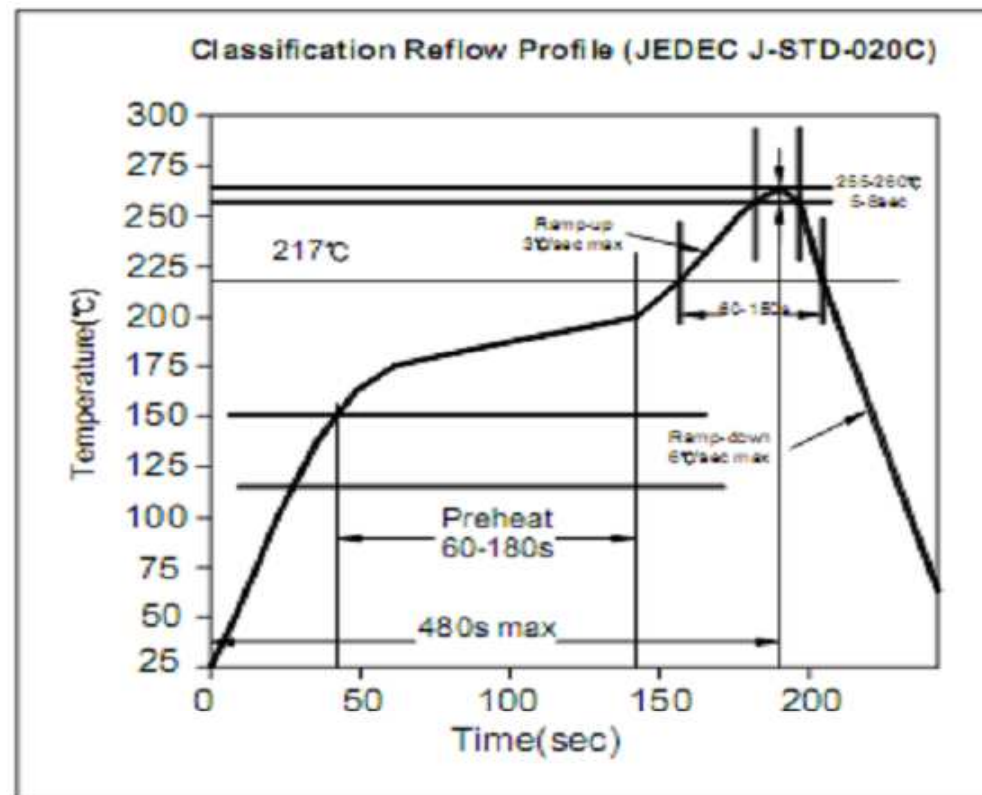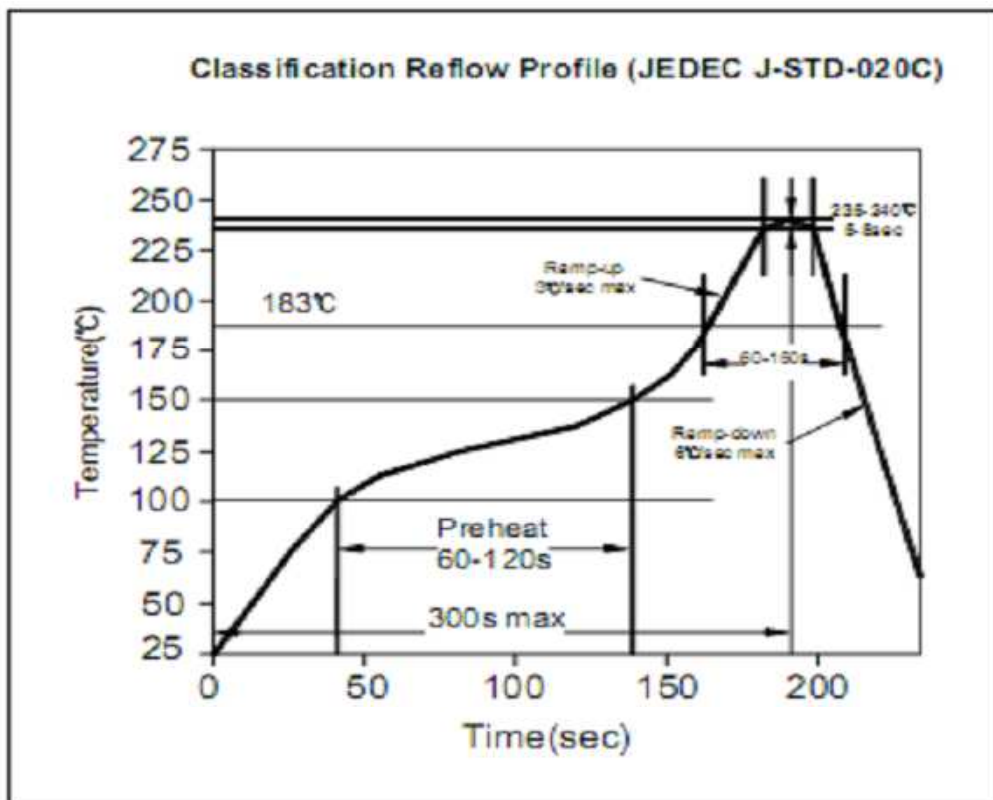

**Board to Board Connector  
Pitch 0,40mm, H1,0mm**

Part No.: **T15F003**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.10.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	Customer: