

EDCON-COMPONENTS





Specifications

Current Rating: 1,0A
 Insulation Resistance: 1000M Ohm min.
 Contact Resistance: 20milli Ohm max.
 Dielectric Voltage: 500V AC for one minute
 Operating Temperature: -40°C ~ to +105°C
 Insulator Material: PA6T+30% G.F.(UL94V-0)

Contact Pin: Brass
 Contact Plating: Gold Flash all over

Drawing

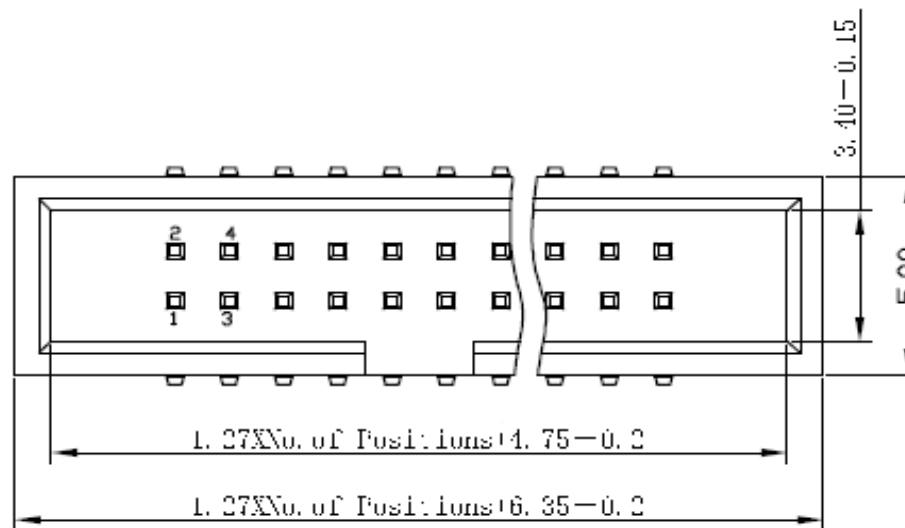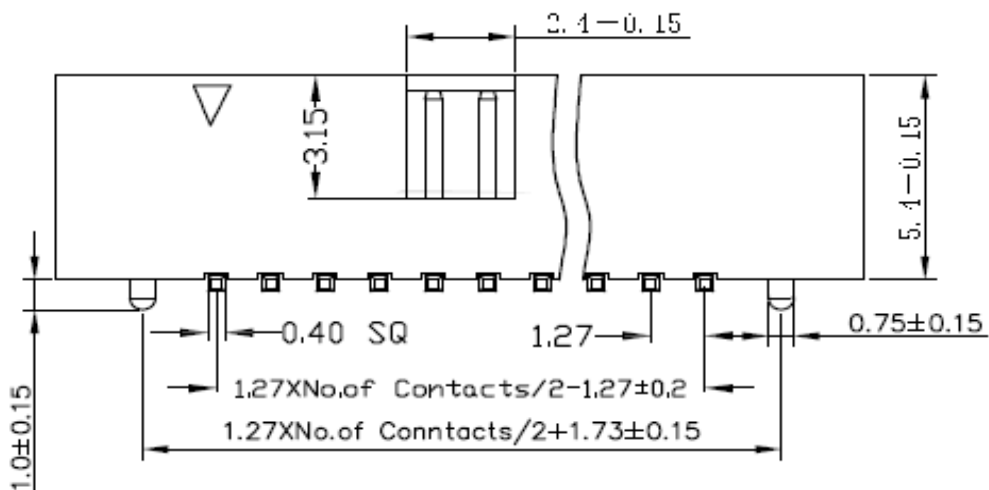

Box Header Pitch	
1,27x1,27mm	
Part No.:	T16C010-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.08.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Contact Plating	Color of Body	Material	Position Peg	Pin Length Code	ROHS	Packing		
T16C010-	XX	G0	BK	PA	Y	A01	R	BU		

XX = 10,14, 16,20,24,26, 30,32,34,40, 44,50,60,64, 80,100	G0 = Gold Flash	BK = Black	PA = PA6T +30% GF f. ROHS	Y = with Position Peg	A01 = Dimension like Pin Length Code	N =NO ROHS conform R =ROHS conform	BU = Bulk Ware
	T0 = Tin plated	BL = Blue					TU = Tube Packing
	GA = 3µ Gold Plating	WH = White	LC = LCP	N = without Position Peg		TY = Tray Packing	
	GB = 5µ Gold Plating				TC = Tube w. Pic and Place Cap		
	GC = 10µ Gold Plating					TR = Tape / Reel w. Pic and Place Cap	
	GD = 30µ Gold Plating						
	S0 = Selectiv Plating Gold Flash / Tin						
	SD = Selectiv Tin/ 5µGold						
SD = Selectiv Tin/ 10µ Gold Flash							
SD = Selectiv Tin/ 20µ Gold	SD = Selectiv Tin/ 30µ Gold						


Box Header Pitch 1,27x1,27mm
Part No.: T16C010-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.08.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4


EDCON-COMPONENTS



Soldering Profile for Lead Soldering (P.B.T.)

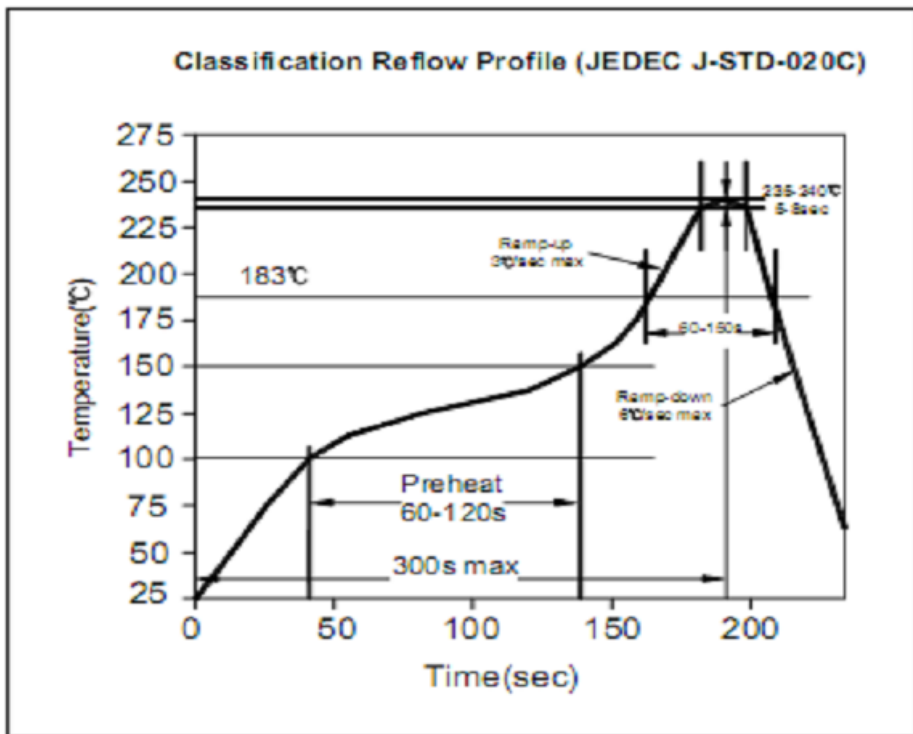

Soldering Profile for Lead Free Soldering (Nylon 6T)

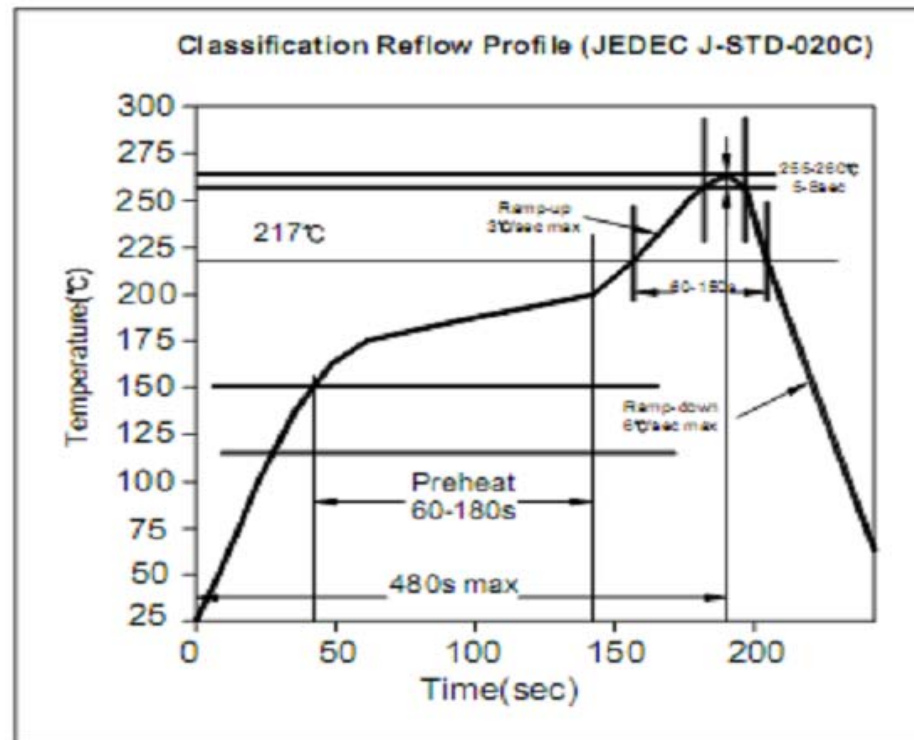

Box Header Pitch	
1,27x1,27mm	
Part No.:	T16C010-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.08.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	