

EDCON-COMPONENTS




Specifications


Current Rating: 2,0A
Operating Temperature: -55°C ~ t+ 105°C
Contact Resistance: 20 M Ω max.
Withstanding Voltage: AC 1000V for 1 Minute
Insulation Resistance: 100000M Ω min at DC100V

Contact Material: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PBT 30%GF UL 94V-0
Insertion Force: 20Pin max. 18N
Withdrawal Force: 0,15N min per individ. Contact

Drawing (dimensions all into mm)

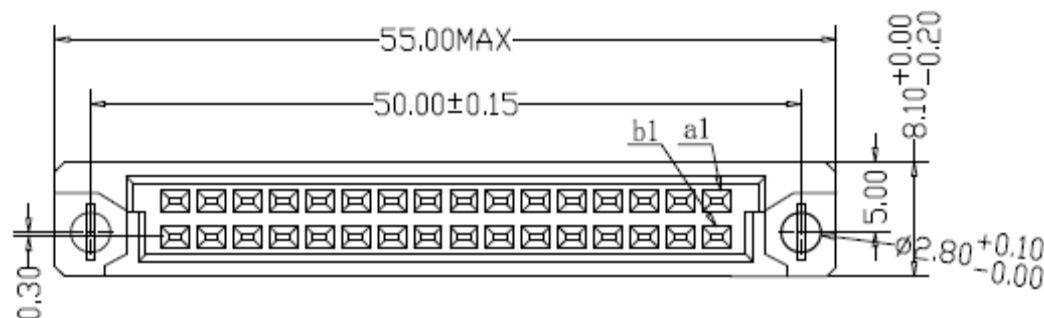

PCB Layout


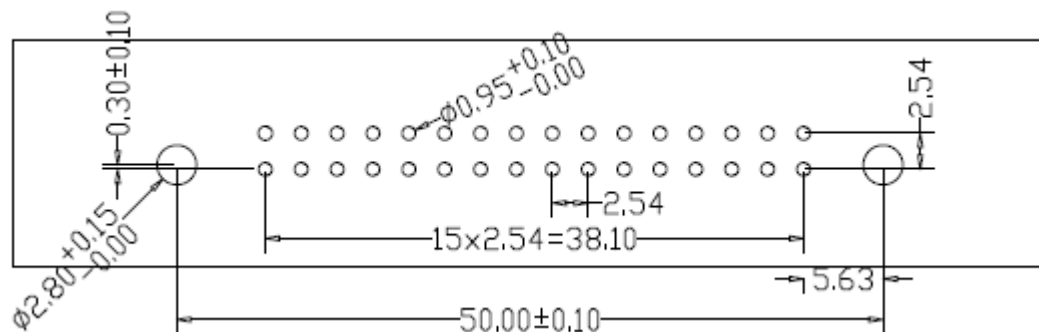


**DIN41612 Connector 1/2 Size
Type B Female Straight PRESS-FIT**

Part No.: **T21008-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.02.2017	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4		

EDCON-COMPONENTS

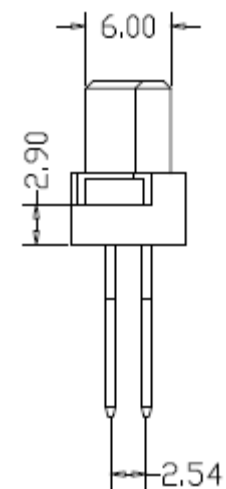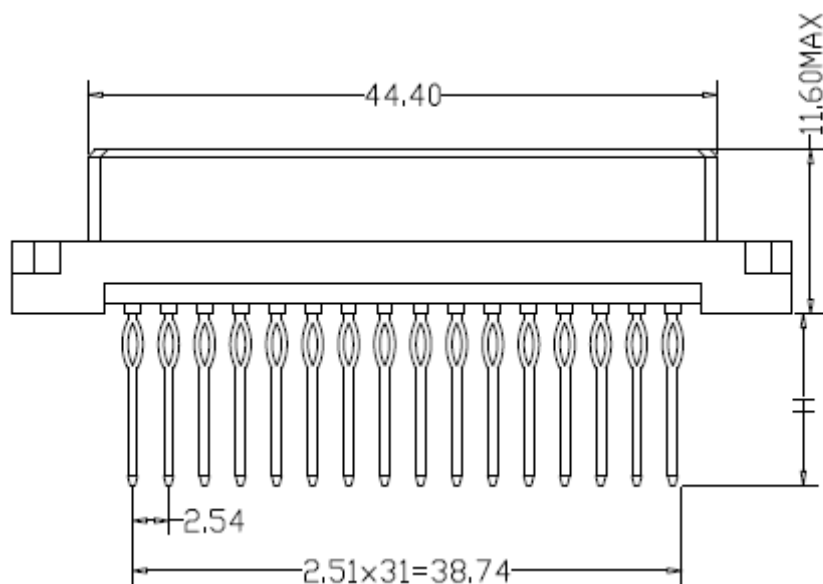

**DIN41612 Connector 1/2 Size
Type B Female Straight PRESS-FIT**

Part No.: **T21008-**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.02.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	

EDCON-COMPONENTS



Ordering Informations

Serie	Loaded Contacts	Termination Specification	Row Loaded Contacts	Contact Plating	Special function	Special function	ROHS	Packing		
T21008-	16	A1	A0	S0	N	N	R	BU		

16 = Pos.		A0= Only Row A	G0= Gold Flash	N= No Special	N= No Special	R= ROHS Conform	BU= Bulk Packing		
32 = Pos.		B0= Row A + B	S0= Selectiv Gold Flash/Ni			N= NON ROHS	TY= Tray Packing		
	A3=Tail IH=5,0mm		G1= 3µ AU Gold				IV= Individual Packing		
			G2= 5µ AU Gold						
	A5=Wrap H=13mm	C2= Row A+B 2,4,6...	G3= 10µ AU Gold						
	A6=Wrap H=17mm		G4= 15µ AU Gold						
			G5= 30µ AU Gold	S1= 3µ AU Gold / Ni	S4= 15µ AU Gold / Ni				
				S2= 5µ AU Gold / Ni	S5= 30µ AU Gold / Ni				
				S3= 10µ AU Gold / Ni	TN= Tin Plated				

**DIN41612 Connector 1/2 Size
Type B Female Straight PRESS-FIT**

Part No.: **T21008-**

Unless Otherwise specified tolerance

X=± 0,35	X.X=± 0,25	X.XX=± 0,20	X.XXX=± 0,15
-----------------	-------------------	--------------------	---------------------

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.02.2017	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4	


www.edcon-components.com

email: info@edcon-components.com




Soldering Informations

Classification Reflow Profile (JEDEC J-STD-020C)

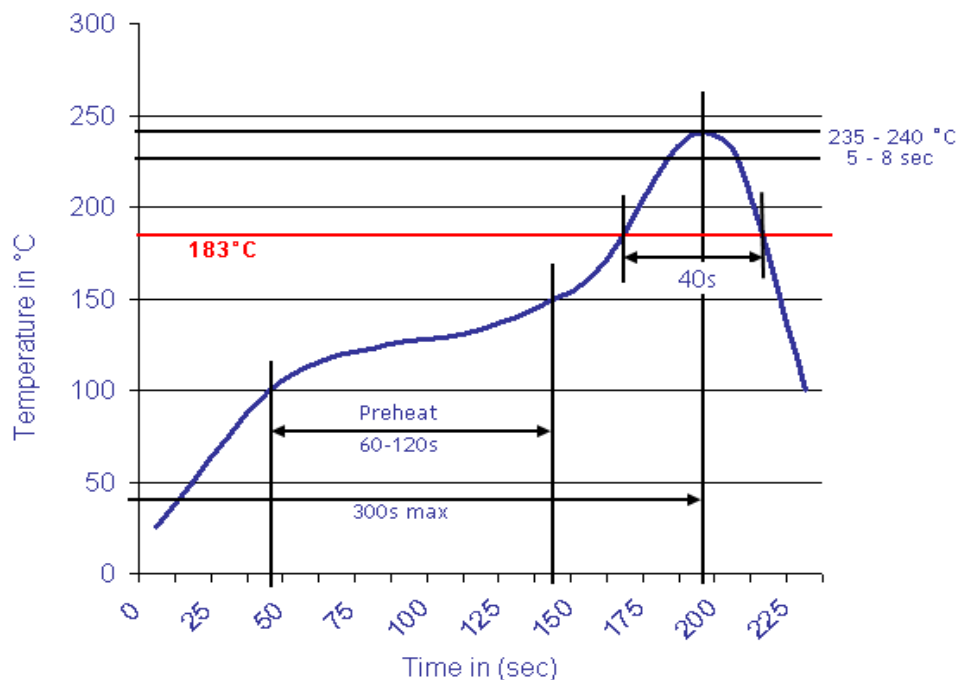

Classification Reflow Profile (JEDEC J-STD-020C)

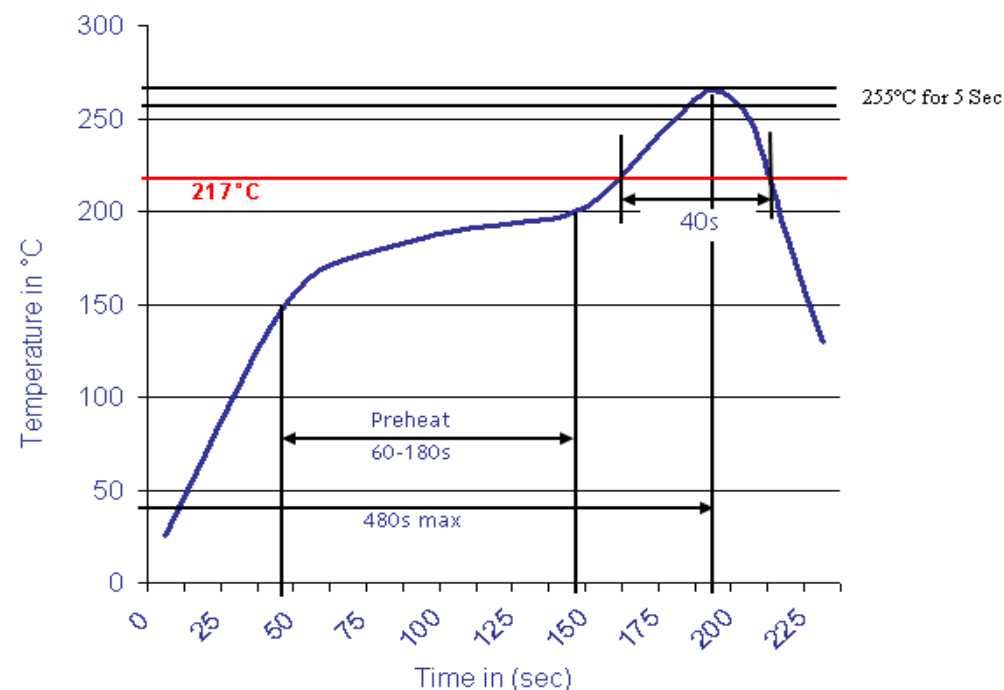

**DIN41612 Connector 1/2 Size
Type B Female Straight PRESS-
FIT**

Part No.: **T21008-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.02.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	Customer: