

# EDCON-COMPONENTS




## Specifications

Current Rating: 2,0A  
 Operating Temperature: -55°C ~ +105°C  
 Contact Resistance: 20 M Ω max.  
 Withstanding Voltage: AC 1000V for 1 Minute  
 Insulation Resistance: 100000M Ω min at DC100V  
  
 Contact Material: Brass  
 Contact Plating: Au or Sn over Ni  
 Insulator Material: PBT +30%GF UL 94V-0  
 Insertion Force: 64Pin max. 60N  
 Withdrawal Force: 0,15N min per individ. Contact

## Drawing ( dimensions all into mm)



## PCB Layout

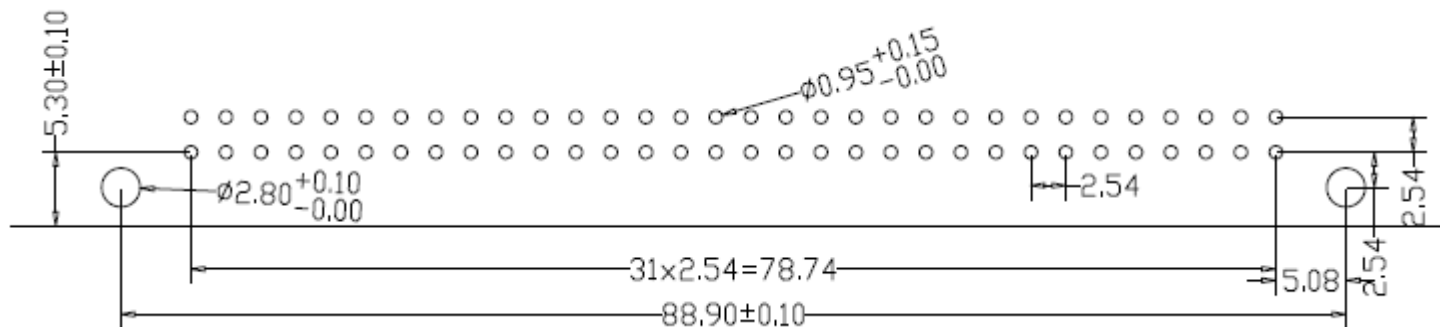

<b>DIN41612 Connector Full-Size Type Q Female R/A</b>	
Part No.:	<b>T21108-</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.02.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

# EDCON-COMPONENTS

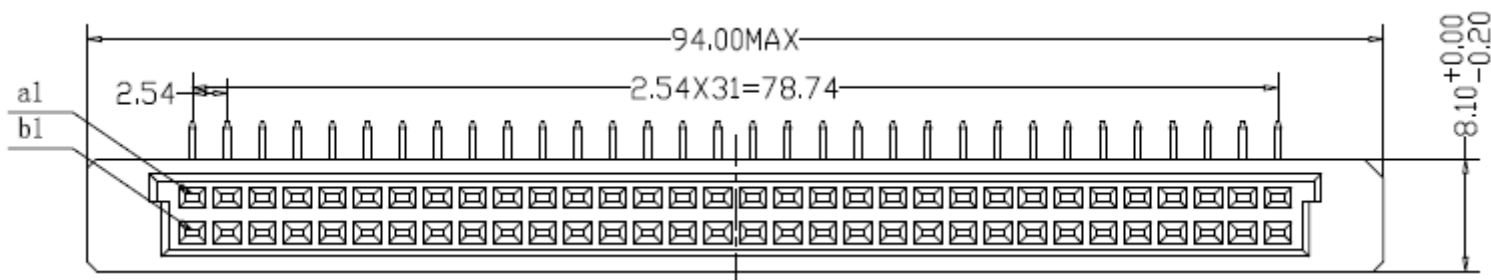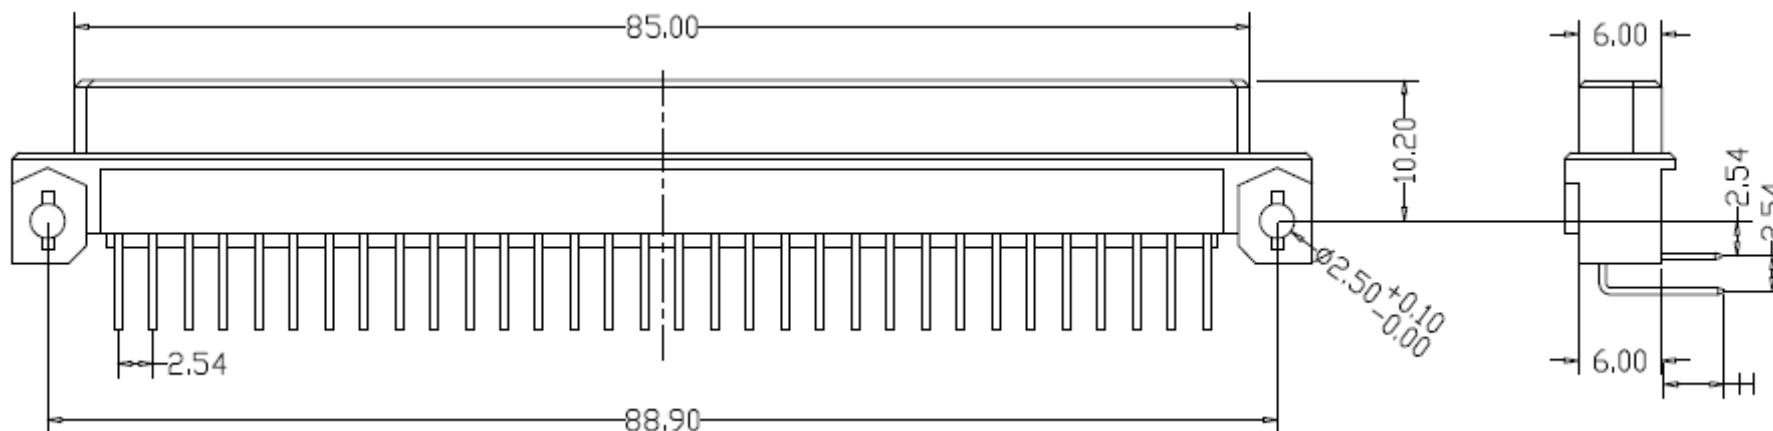

<b>DIN41612 Connector Full-Size Type Q Female R/A</b>	
Part No.:	<b>T21108-</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.02.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

Serie	Loaded Contacts	Termination Specification	Row Loaded Contacts	Contact Plating	Special function	Special function	ROHS	Packing		
<b>T21108-</b>	<b>16</b>	<b>A1</b>	<b>F0</b>	<b>S0</b>	<b>N</b>	<b>N</b>	<b>R</b>	<b>TY</b>		


<b>16 = Pos.</b>	<b>A1=Solder</b> H=3,0mm	<b>A0= Only</b> Row A	<b>G0= Gold</b> Flash	<b>N= No</b> Special	<b>N= No</b> Special	<b>R= ROHS</b> Conform	<b>BU= Bulk</b> Packing		
<b>32 = Pos.</b>		<b>B0= Only</b> Row B	<b>S0= Selectiv</b> Gold Flash/Ni			<b>N= NON</b> ROHS	<b>TY= Tray</b> Packing		
<b>64 = Pos.</b>		<b>C0= Row</b> A + B	<b>G1= 3µ AU</b> Gold				<b>IV= Individual</b> Packing		
	<b>A4=Tail</b> H=7,0mm	<b>C1= Row</b> A + B 1,3,5..	<b>G2= 5µ AU</b> Gold						
		<b>C2= Row</b> A + B 2,4,6..	<b>G3= 10µ AU</b> Gold						
			<b>G4= 15µ AU</b> Gold						
			<b>G5= 30µ AU</b> Gold						
			<b>S1= 3µ AU</b> Gold / Ni	<b>S4= 15µ AU</b> Gold / Ni					
			<b>S2= 5µ AU</b> Gold / Ni	<b>S5= 30µ AU</b> Gold / Ni					
			<b>S3= 10µ AU</b> Gold / Ni	<b>TN= Tin</b> Plated					

**DIN41612 Connector Full-Size  
Type Q Female R/A**

Part No.: **T21108-**


Unless Otherwise specified tolerance					
<b>X=± 0,35</b>	<b>X.X=± 0,25</b>	<b>X.XX=± 0,20</b>	<b>X.XXX=± 0,15</b>		
DRW: Jason	CHKD: Wilson	MATL: Wilson	TOLERANCE: Mason	DATE: 18.02.2017	
APPD: Schumi		FINISH: Jamy	Sheet No.	3 from 4	

Customer:  
email: [info@edcon-components.com](mailto:info@edcon-components.com)




Soldering Informations

Classification Reflow Profile (JEDEC J-STD-020C)

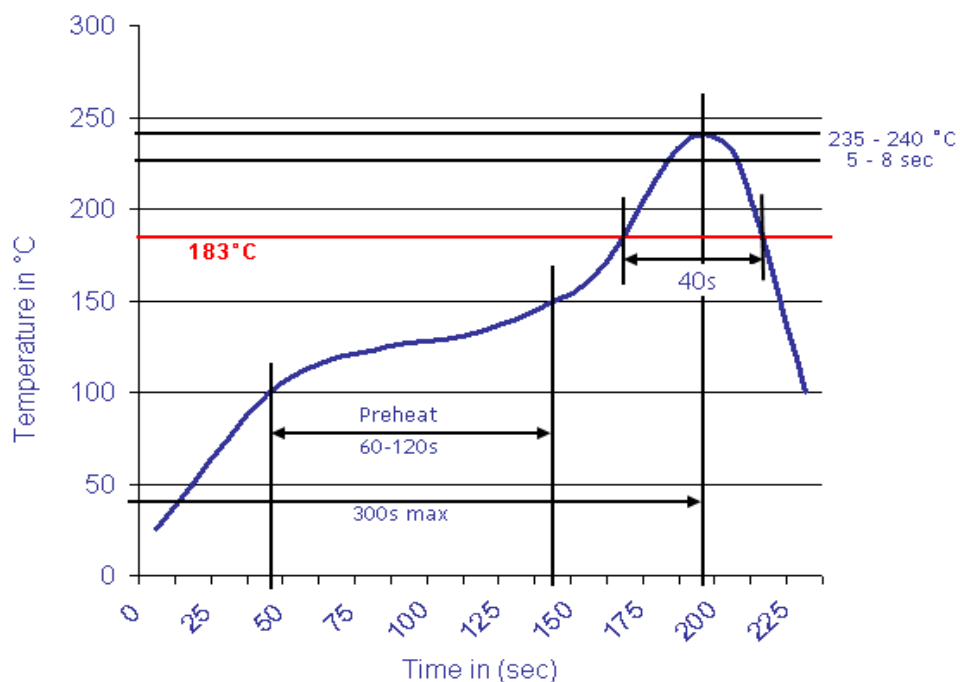

Classification Reflow Profile (JEDEC J-STD-020C)

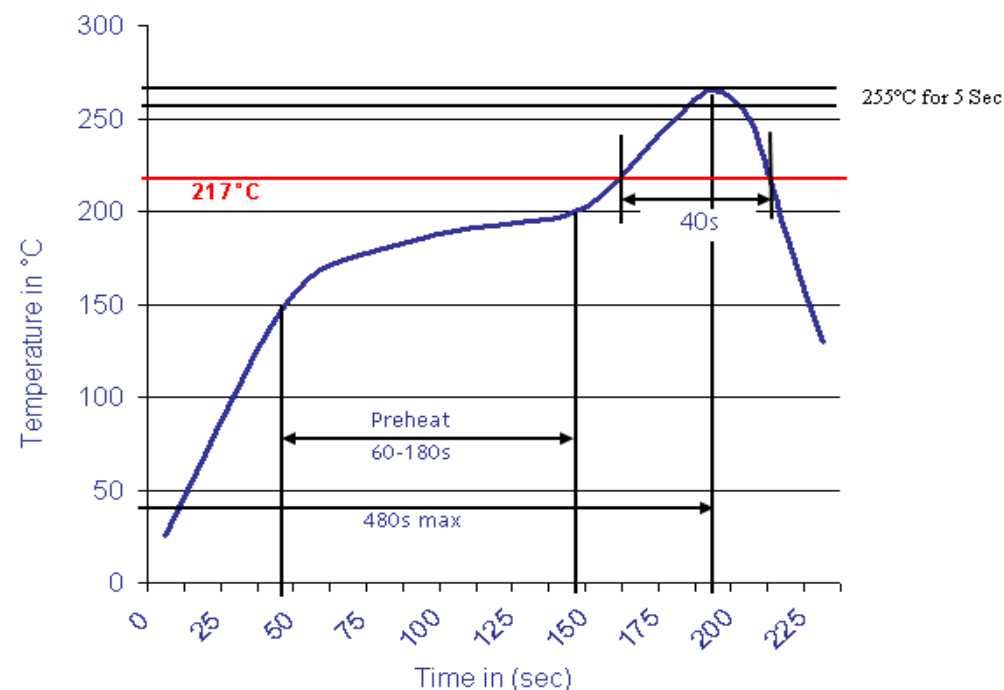

**DIN41612 Connector Full-Size  
Type Q Female R/A**

Part No.: **T21108-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.02.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	Customer: