


# EDCON-COMPONENTS





## Specifications

**Current Rating:** 1,5 Ampere  
**Insulator Resistance:** 5000 Megaohm min.  
**Contact Resistance:** 20m Ohm max.  
**Dielectric Withstanding:** AC 500V  
**Operating Temperature:** -65°C to +125°C  
**Contact Material:** Brass  
**Insulator Material:** PBT, UL 94V-0 Black  
  
**Contact Plating:** Tin, Gold or Selective Plated  
**Standard:** Gold Flash Overall

## P.C.B Layout




## Drawing

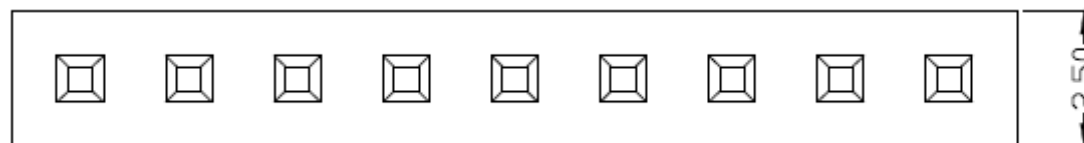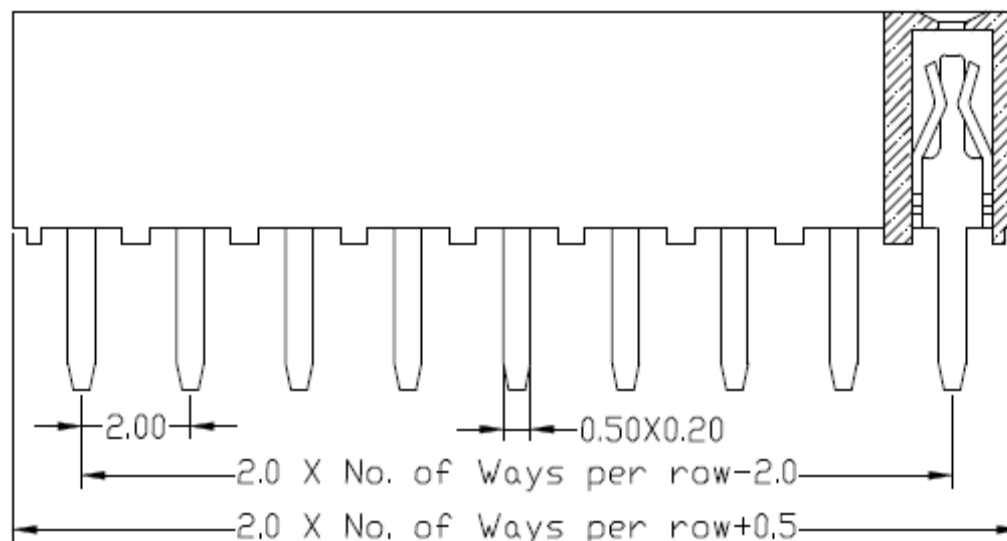


						Unless: Otherwise specified tolerance (mm)				<b>Female Header Pitch 2,00mm</b>
						X	XX	XXX	XXXX	
						± 0,35	± 0,25	±0,20	±0,15	Part No.: <b>T27B1095-</b>
DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.10.2017	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4		

# EDCON-COMPONENTS



## Pin Code length table free configuration


Order Code	Dimension (mm)			
	A			
A01	2,70			
A02				
A03				
A04				
A05				
A06				
A07				
A08				
A09				
A10				
A11				
A12				
A13				
A14				
A15				
A16				
A17				
A18				
A19				
A20				
A21				
A22				

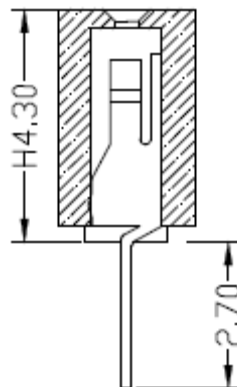

<b>Female Header Pitch 2,00mm</b>	
Part No.:	<b>T27B1095-</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.10.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	

# EDCON-COMPONENTS



## Ordering Informations


Serie	No. of Pos.	Construction	Contact Plating	Material	Special function	Pin Length Code	ROHS	Packing		
<b>T27B1095-</b>	<b>XX</b>	<b>ST</b>	<b>G0</b>	<b>PB</b>	<b>N</b>	<b>A01</b>	<b>R</b>	<b>BU</b>		

<b>02 ~ 40Pos.</b>	<b>ST</b> Straight THT	<b>G0</b> = Gold Flash (Standard)	<b>PB</b> = P.B.T	<b>N</b> = No special	look Table No. 1	<b>N</b> =NO ROHS conform	<b>BU</b> = Bulk (Standard)		
		<b>T0</b> = Tin plated						<b>NY</b> = Nylon-6T	<b>R</b> = ROHS conform
		<b>GA</b> = 10µ Gold Plating	<b>LC</b> = LCP					<b>TC</b> = Tube w. pic and Place Cap	
		<b>GB</b> = 15µ Gold Plating							<b>P4</b> = PA46
		<b>GC</b> = 20µ Gold Plating						<b>TR</b> = Tape/Reel w. pic and Place Cap	
		<b>S0</b> = Selectiv Plating Gold Flash / Tin							


<b>Female Header Pitch 2,00mm</b>
Part No.: <b>T27B1095-</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.10.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4


# EDCON-COMPONENTS



## Soldering Profile for Lead Soldering ( P.B.T. )

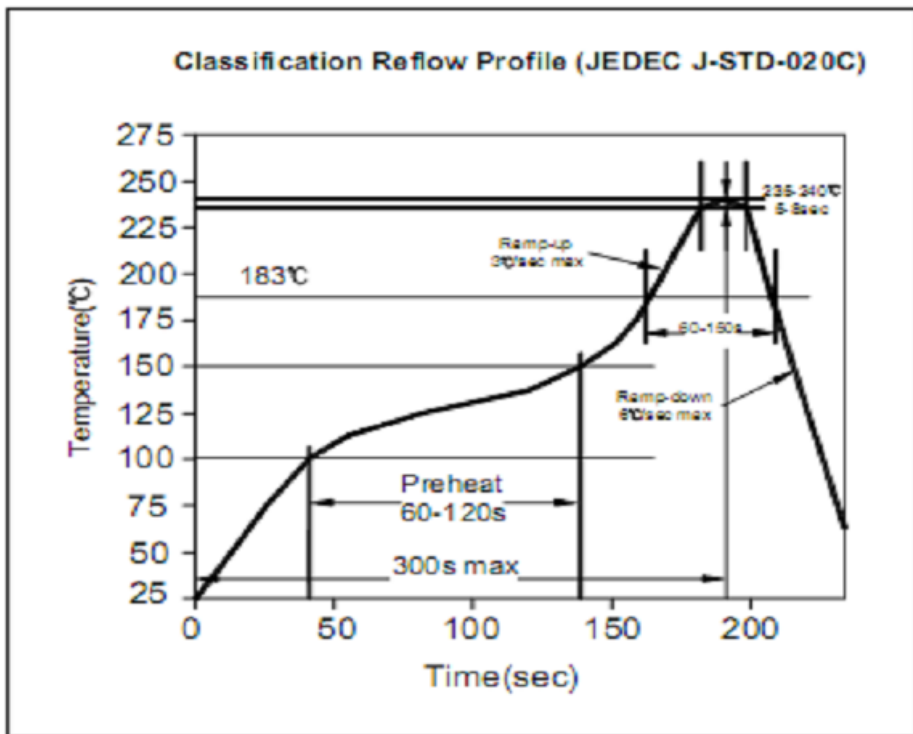

## Soldering Profile for Lead Free Soldering ( Nylon 6T )

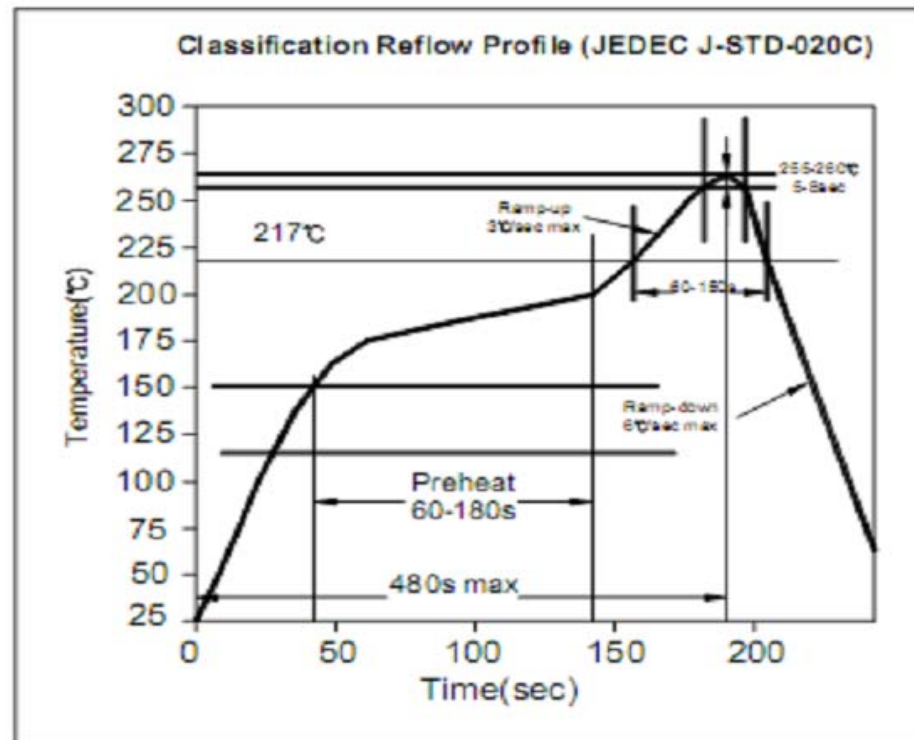

**Female Header Pitch  
2,00mm**

Part No.: **T27B1095-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.10.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	Customer:

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)