


EDCON-COMPONENTS




Specifications

Current Rating:	3 Ampere
Insulator Resistance:	>1000 Megaohm min.
Contact Resistance	<4m Ohm max.
Dielectric Withstanding:	min. 1000V rms
Operating Temperature:	.-40°C to +105°C
Contact Material:	Brass
Insulator Material:	PPS, UL 94V-0
Contact Plating:	Tin, Gold Plated look Order Code
Lifetime:	min 500cycles

PCB Layout

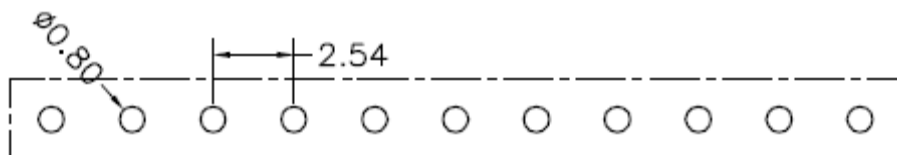

Drawing

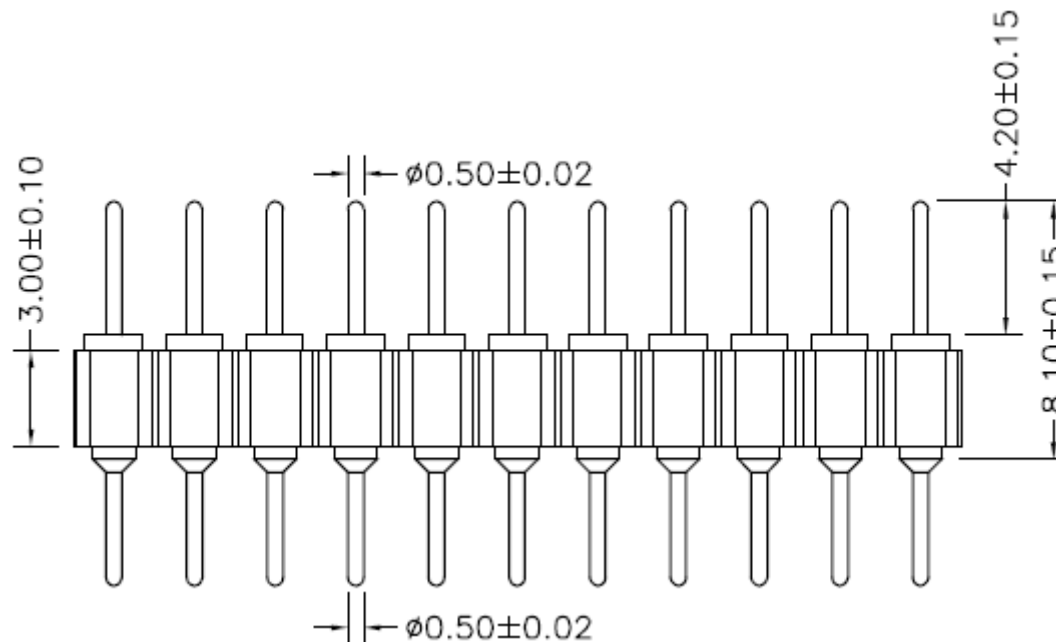

Male Header Pitch 2,54mm



Part No.: **T40178-**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.06.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	



Drawing

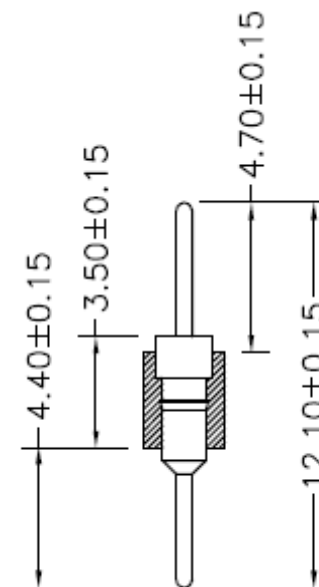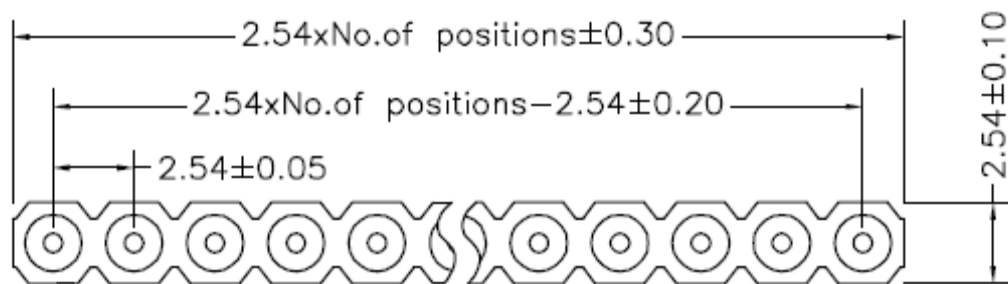


Male Header Pitch 2,54mm

Part No.: **T40178-**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.06.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	

EDCON-COMPONENTS

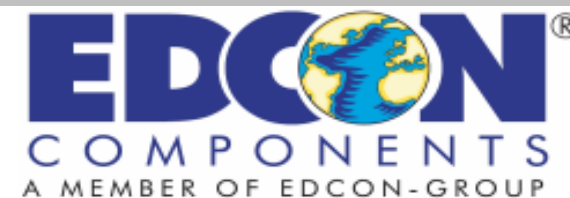

Ordering Informations

Serie	No. of Pos.	Contact Plating	ROHS	Packing						
T40178-	xx	A	R	BU						

XX= total	A= Tin 150µ "	N=NO ROHS conform	BU= Bulk				
	B= Tin 200µ"		TU= Tube				
	C= Gold Flash	R=ROHS conform	TY= Tray Packing				
	D= 2µ Gold Plating						
	E= 3µ Gold Plating						
	F= 10µ Gold Plating						
	G= 15µ Gold Plating						
H= special							

Male Header Pitch 2,54mm

Part No.: **T40178-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.06.2017	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2		

www.edcon-components.com

email: info@edcon-components.com