
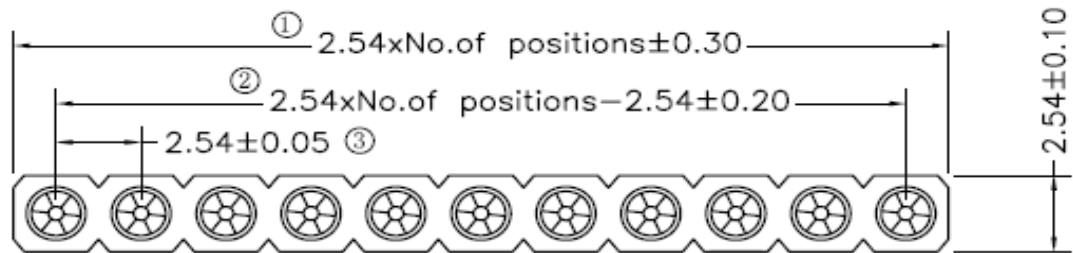


Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Contact Clip (4finger):	Beryllium Copper (C17200)
Mating Pin: (Ø)	0,70 to 0,9mm Square 0,64
Forces:	polished steel gauge(Ø)0,76mm
.-Insertion:	1,2N typ.
.-Withdrawel:	0,6N typ.
Mechanical Life:	min 500 cycles
Rated Current:	3A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 1000V rms
Operating Temperature:	.-55°C to + 125°C
Soldering Temeprature:	.,+235°C 5sec.
Maximal position of deliver:	2
Maximal position of deliver:	40

Technical Drawing



Ordering Information

Serie	No. of Pos.	Solder Pin Plating	Inner Clip Plating	ROHS	Packing	Special function A
T40245	40	A	3	R	B1	A

2 ~ 40	A= Tin 150µ" (Standard)	1= Tin 150µ" 2= Tin 200µ"	R= ROHS conform	B1= Bulk 100PCS	A= Solder Pin Length 2,0mm
	B= Tin 200µ"	3= GF (Standard)			
	C= GF	4= Gold 2µ"	TU = Tube w. Mylar Foil		
	D= Gold 2µ"	5= Gold 3µ"		T0 = Tube Packing	
	E= Gold 3µ"	6= Gold 10µ"			
	F= Gold 10µ"	7= Gold 15µ"			
	G= Gold 15µ"	8=Special			
	H=Special				

**Machined Contact Pitch
2,54mm**

Part No.: **T40245**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	13.05.2020
APPD:	Join			FINISH	Shieh	Sheet	1 from 1

Copyright by S.Tiede