


EDCON-COMPONENTS



Contact





Specifications




Voltage Rating: 30 VAC
 Current Rating: 1,0A max.
 Operating Temperature: - 40°C to + 60°C
 Contact Resistance: 50m Ohm max.
 Withstanding Voltage: 100VAC min. at Sea Level
 Insulation Resistance: >500 M Ohm

Material Housing: LCP UL94V-0
 Insulator : Black
 Color: Black
 Contact Material: Copper Alloy
 Contact Type: Stamped
 Contact Plating: Selective Gold plated
 Shielding: Look Order Code
 Lifetime: 1500 cycles

Drawing (dimensions all into mm)

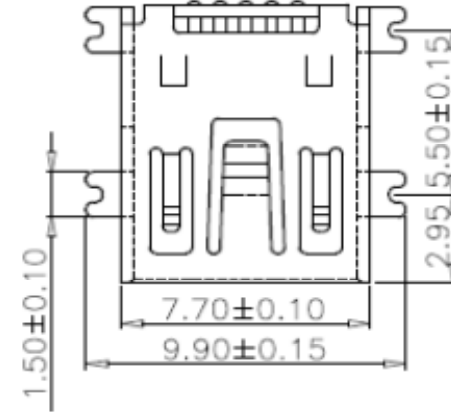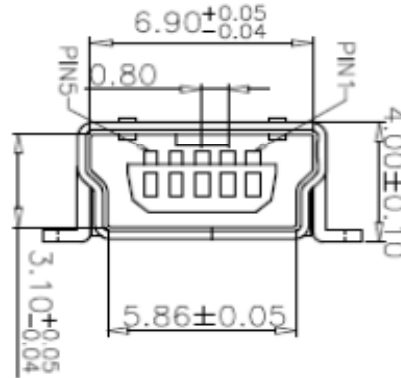

PCB Layout

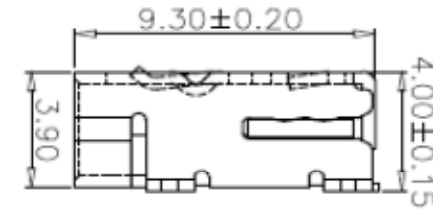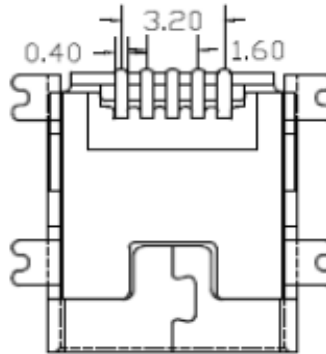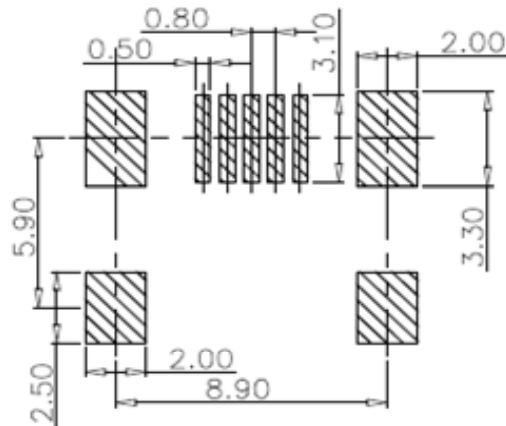

Tolerances unless otherwise specified (mm)


X	X.X	X.XX	X.XXX	Angle
±	±	±	±	±3°
DRW:	Jason	CHKD	Wilson	MATL:
APPD:	Schumi			FINISH
				Jamy
			Sheet No.	19.08.2019
				1 from 3

SMT Mini USB Connector Type B

Part No.: **T64011**

Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	No of Pos.	Contact Plating	Contact Material	Body Colour	Shell Material	Insulator Material	Special function	ROHS	Packing
T64011	05	GF	PB	BK	ST	LC	N	R	TR


05= No of Contacts	TN= Tinned	PB= Phosphor Copper	BK= Black	SS= Stainless Steel	PB= PBT + 30GF	N= No function	R= RoHS Conform	BU= Bulk-Ware
	GF= Gold Flash	BR= Brass		BR= Brass	LC= LCP			TY= Tray Packing
	GA= 3µ Gold Flash			IR= Iron				TR= Tape Reel Packing with PIC and PLACE Mylar Foil
	GB= 5µ Gold Flash							
	GC= 10µ Gold Flash							
	GD= 15µ Gold Flash							
	GE= 30µ Gold Flash							

SMT Mini USB Connector Type B

Part No.: **T64011**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	19.08.2019
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3




Contact



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

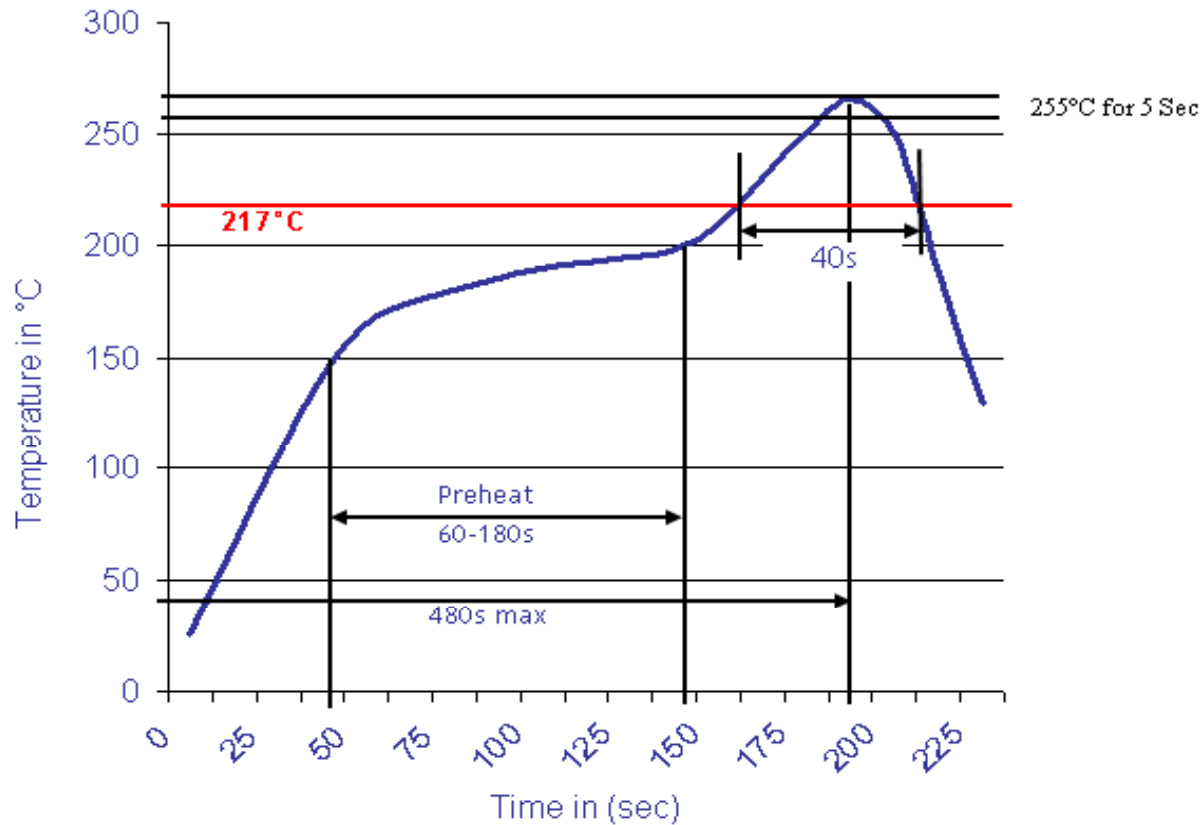

**SMT Mini USB Connector
Type B**

Part No.: **T64011**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	19.08.2019
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	