

# EDCON-COMPONENTS




## Specifications

Voltage Rating: 30 VAC  
 Current Rating: 1,5A  
 Operating Temperature: -55°C to + 85°C  
 Contact Resistance: 30m Ohm max.  
 Withstanding Voltage: 500VAC min.  
 Insulation Resistance: >100M Ohm min.  
 Contact Thickness: 0,20mm



### Material:

Insulator : look order code  
 Color: look order code  
 Contact Material: look order code  
 Contact Type: Stamped  
 Contact Plating: look order code  
 Shielding: look order code


## Drawing ( dimensions all into mm)

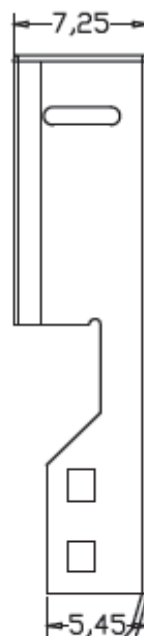

Front Shell

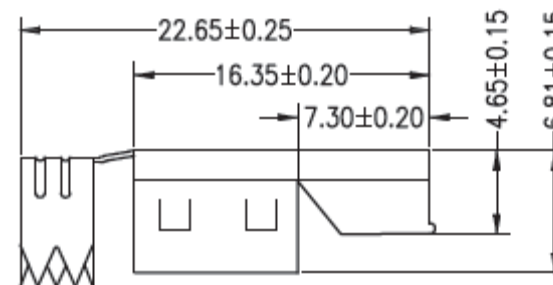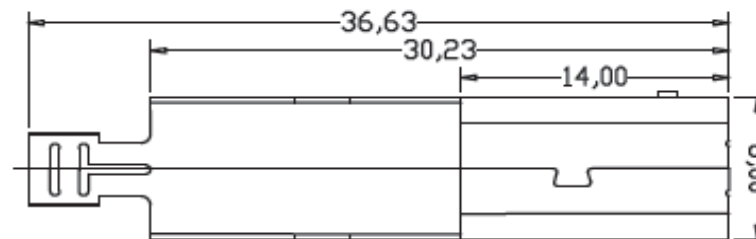

RearShell

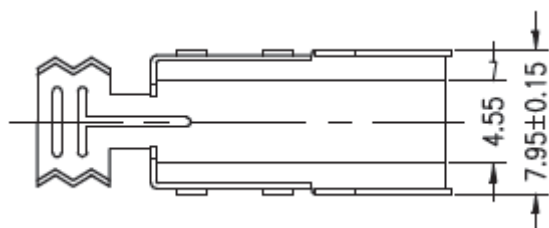

**USB-B Male Connector Cable Mount**




Part No.: **T64012**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.05.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	Customer:

# EDCON-COMPONENTS



## Housing

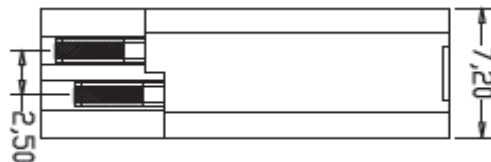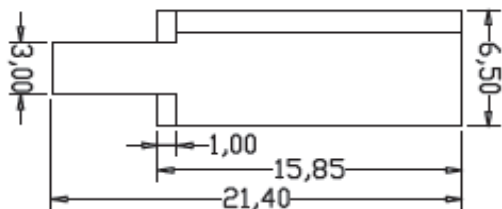

**USB-B Male Connector Cable Mount**

Part No.: **T64012**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.05.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	Customer:

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

Serie	Color Inside	Shell Material	Insulator Material	Contact Material	Contact Plating	Special function	Packing	Packing		
-------	--------------	----------------	--------------------	------------------	-----------------	------------------	---------	---------	--	--

<b>T64012</b>	<b>WH</b>	<b>B</b>	<b>P</b>	<b>B</b>	<b>G0</b>	<b>0</b>	<b>R</b>	<b>BU</b>		
---------------	-----------	----------	----------	----------	-----------	----------	----------	-----------	--	--

<b>BK</b> = Black Color	<b>B</b> = Brass	<b>P</b> = PBT + 30% GF	<b>B</b> = Brass	<b>G0</b> = Gold Flash (Standard)		<b>R</b> = ROHS conform	<b>BU</b> = Bulk Ware
<b>WH</b> = White Color	<b>I</b> = Iron	<b>L</b> = LCP	<b>P</b> = Phosphor Copper	<b>G1</b> = 3μ Gold	<b>0</b> = No Special function	<b>N</b> = NON ROHS conform	<b>TY</b> = Tray Packing
	<b>S</b> = Stainless Steel			<b>G1</b> = 5μ Gold			<b>TR</b> = Tape / Reel w. Pic and Place Foil
				<b>G1</b> = 10μ Gold			<b>IV</b> = Individual Packing
				<b>G1</b> = 15μ Gold			
				<b>G1</b> = 30μ Gold			

**USB-B Male Connector Cable Mount**

Part No.: **T64012**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.05.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

Customer: