




# EDCON-COMPONENTS



## Specifications

Voltage Rating:	30 VAC
Current Rating:	3,0A
Operating Temperature:	-.55°C to + 85°C
Contact Resistance:	40m Ohm max.
Withstanding Voltage:	100VAC min.
Insulation Resistance:	>100M Ohm min.
Contact Thickness:	0,15mm
<b>Material:</b>	
Insulator :	look order code
Color:	look order code
Contact Material:	look order code
Contact Type:	Stamped
Contact Plating:	look order code
Shielding:	look order code
Lifetime:	10000 cycles min.
Force:	5~20N Max.

## Drawing ( dimensions all into mm)

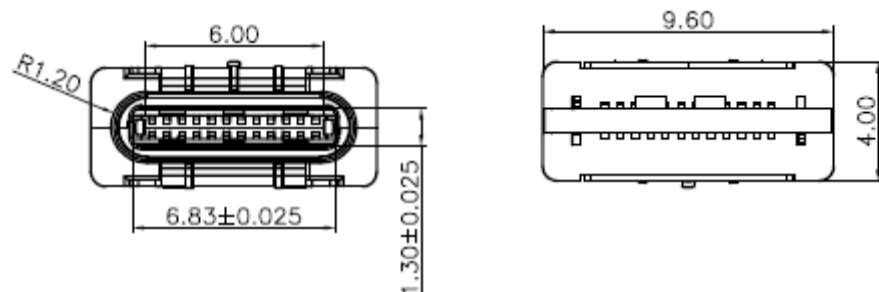
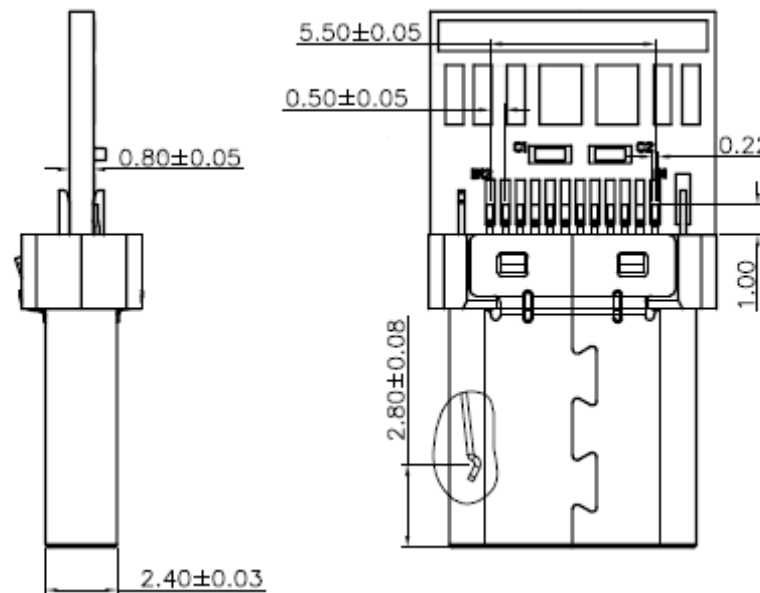


**SMT USB 3.1 Plug C-Type with Straddle**

Part No.: **T64130**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.09.2015	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4		

# EDCON-COMPONENTS

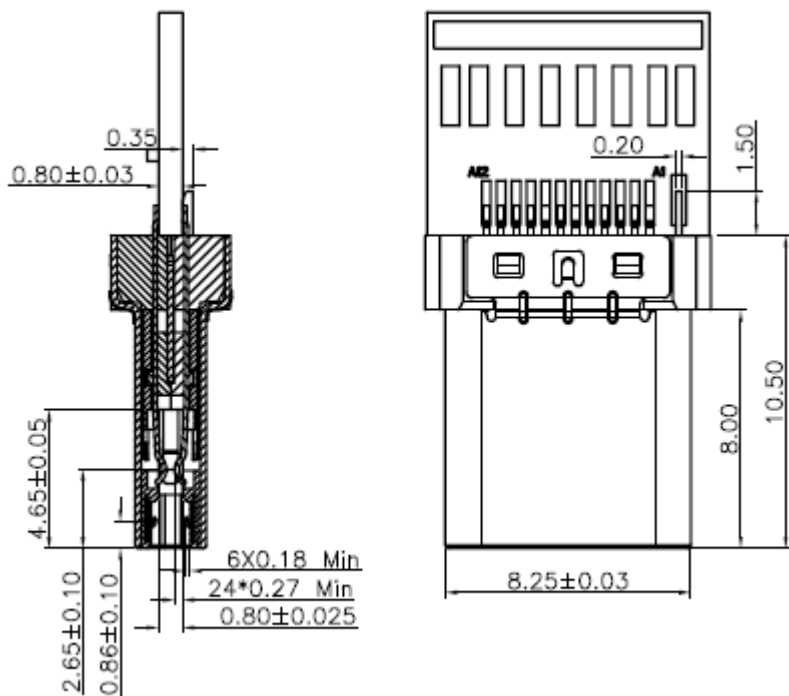

**SMT USB 3.1 Plug C-Type with Straddle**

Part No.: **T64130**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.09.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

Serie	Color Inside	Shell Material	Insulator Material	Contact Material	Contact Plating	Special function	Packing	Packing		
<b>T64130</b>	<b>BK</b>	<b>B</b>	<b>P</b>	<b>B</b>	<b>G0</b>	<b>0</b>	<b>R</b>	<b>BU</b>		

<b>BK=</b> Black Color	<b>B=</b> Brass	<b>P=</b> PBT + 30% GF	<b>B=</b> Brass	<b>G0=</b> Gold Flash (Standard)	<b>0=</b> No Special function	<b>R=</b> ROHS conform	<b>BU=</b> Bulk Ware
<b>WH=</b> White Color	<b>I=</b> Iron	<b>L=</b> LCP	<b>P=</b> Phosphor Copper	<b>G1=</b> 3µ Gold		<b>N=</b> NON ROHS conform	<b>TR=</b> Tape / Reel w. Pic and Place Foil
	<b>S=</b> Stainless Steel			<b>G1=</b> 5µ Gold			
				<b>G1=</b> 10µ Gold			
				<b>G1=</b> 15µ Gold			
				<b>G1=</b> 30µ Gold			

**PIC and PLACE FOIL** for automatic assembly machine




**SMT USB 3.1 Plug C-Type with Straddle**

Part No.: **T64130**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.09.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



<b>SMT USB 3.1 Plug C-Type with Straddle</b>	
Part No.:	<b>T64130</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.09.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	