


EDCON-COMPONENTS



Technical Discription

Housing:	PBT or PPO or PC
Contact:	Phosphor Bronze w. silver Plating
Option:	Phosphor Bronze w. nickel Plating
Wire cable size:	solid copper wires up to 0,4~0,8mm
Insulation:	Pe or PVC insulated wire 100% PE foam skin filled / unfilled up to 1,4mm Dia
Contact Resistance:	10 milli Ohm max.
Voltage Rating:	250VDC
Operating Resistance:	500VDC voltage appl 5000M Ohm min.
Dielectric strength:	AC 2000Vrms

Drawing

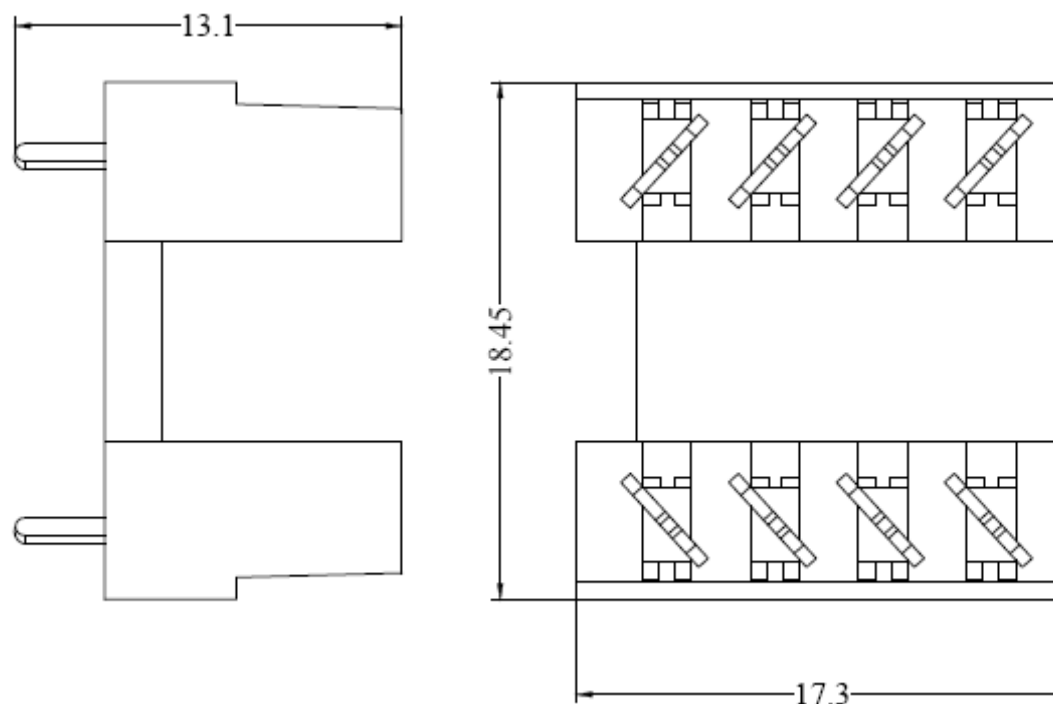

IDC / PCB Connector

Part No.: **T91A35002**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	09.10.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

www.edcon-components.com

email: info@edcon-components.com

Copyright by S.Tiede

EDCON-COMPONENTS



Ordering Informations

Serie	Housing Material	Contact plating	Color of Body	Spezial Function	ROHS	Packing				
-------	------------------	-----------------	---------------	------------------	------	---------	--	--	--	--

T91A35002	-	A	N	WH	0	R	BU			
------------------	---	----------	----------	-----------	----------	----------	-----------	--	--	--

A= PBT	S= Silver plating	WH= White	0= No function	R= ROHS Conform	BU= Bulk-Ware
B= PPO	N= Nickel Plating				IV= Individual Packing
C= PC					

IDC / PCB Connector

Part No.: **T91A35002**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	09.10.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

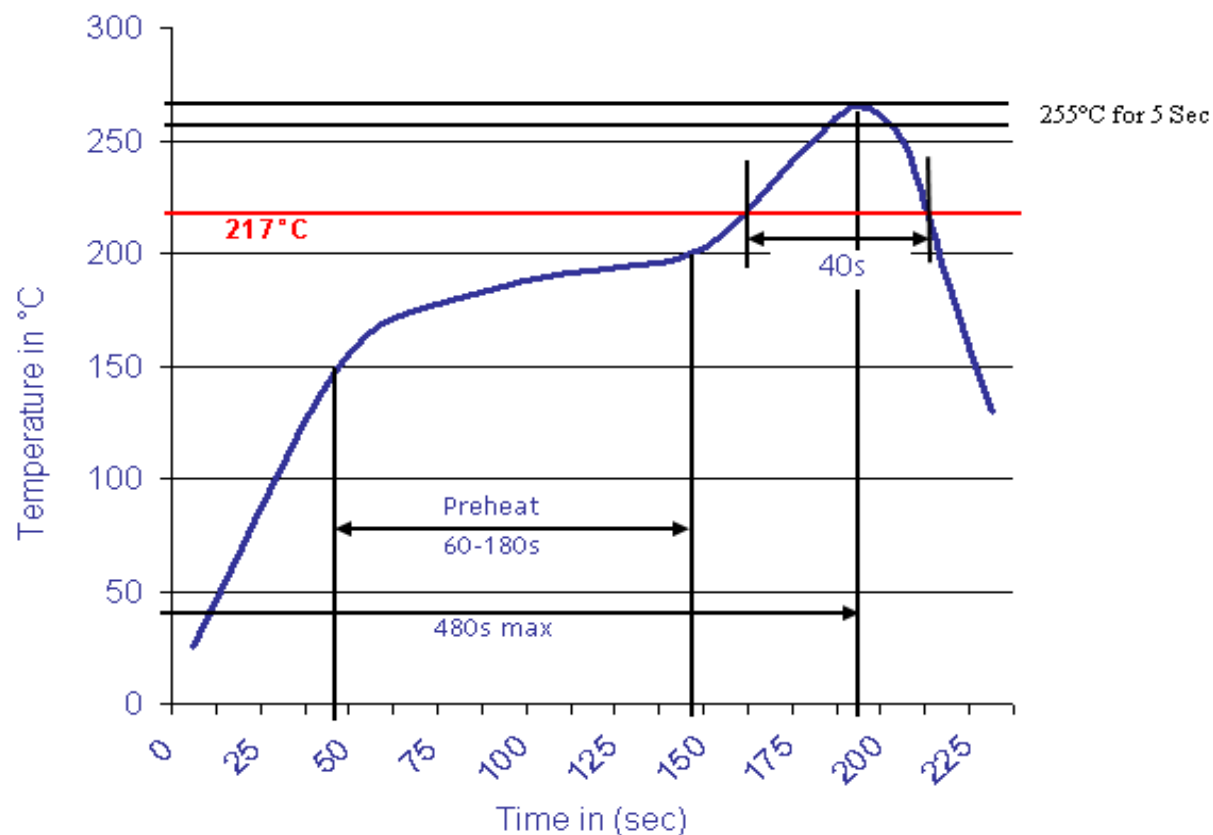

IDC / PCB Connector

Part No.: **T91A35002**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	09.10.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	