








Applications


- Interior automotive lighting
 - Optical indicators
- Communication Products
 - Backlighting
 - Toys

Technical Drawing









Recommended Soldering Pattern

Notes:

All dimensions in mm tolerance is

± 0.1mm unless otherwise noted.

SMT Top View LED Green Red

Part No.: **M11G7002**

Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	1 from 9

Copyright by EDCON-COMPONENTS

www.edcon-components.com

email: info@edcon-components.com







A MEMBER OF EDCON-GROUP

Absolute Maximum Ratings

Ta=25°C

Item	Symbol	GaP	AlGalnP	Unit
Power Dissipation	P_{D}	72		mW
DC Forward Current	l _F	30		mA
Plused Forward Current	I _{FP} *	100		mA
Reverse Voltage	V_R		5	V
Operating Temperature	T _{OP}	-30 1	to 80	°C
Storage Temperature	T_{ST}	-40 1	to 85	°C

^{* 0.1} msec pulse, 10% duty cycle

Electrical / Optical Characteristics

I_F=5mA Ta=25°C

Ermitting Color		Green	Red	
Material		GaP	AlGalnP	
Forward Voltage	typ.	2.1	2.0	V_{F}
Forward Voltage	max.	2.4	2.4	V_{F}
Wavelength	λD	571	639	nm
_	λP			nm
typ.	Δλ			nm
Color Temperature	min.			K
Color reiliperature	max.			K
Luminous Intensity *	min.	16	28	mcd
Luminous intensity	typ.	27	50	mcd
Reverse Current	max.			μA
Viewing Angle	2Θ1/2	120		

^{*} Per NIST standards

SMT Top View LED
Green Red

Part No.: **M11G7002**


DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	2 from 9







Curve

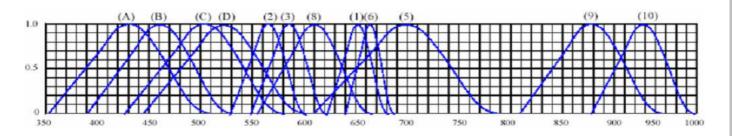

Wavelength (nm)

Relative Intensity vs Wavelength

(1)	GaAsP / GaAs 655nm Red	(9)	GaAlAs 880nm
(2)	GaP	(10)	GaAs & GaAlAs
` ,	568nm Yellow Green	(,	940nm
(3)	GaAsP / GaP	(A)	GaN
` ,	585nm Yellow	` ,	430nm Blue
(4)	GaAsP / GaP	(B)	InGaN
` ,	635nm Orange & Red	` ,	470nm Blue
(5)	GaP	(C)	InGaN
` ,	700nm Red	,	502nm Green
(6)	GaAlAs / GaAs	(D)	InGaN
` ,	660nm Red	,	523nm Green
(8)	GaAsP / GaP		
, ,	610nm Red		

SMT Top View LED Green Red

Part No.: M11G7002

Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	3 from 9


Copyright by EDCON-COMPONENTS










Curve

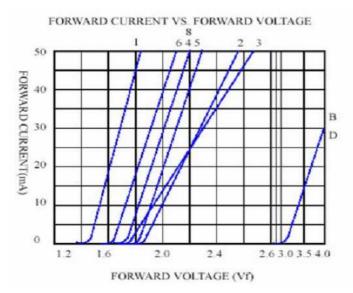

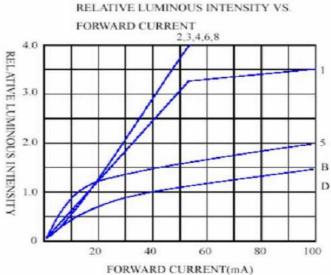

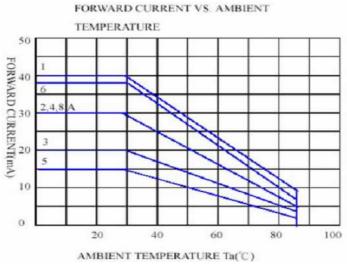

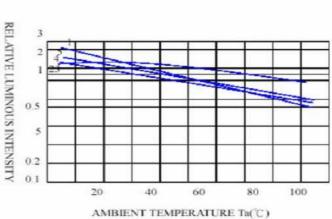

SMT Top View LED Green Red

Part No.: **M11G7002**

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	4 from 9








Solder Condition

Lead Free Solder

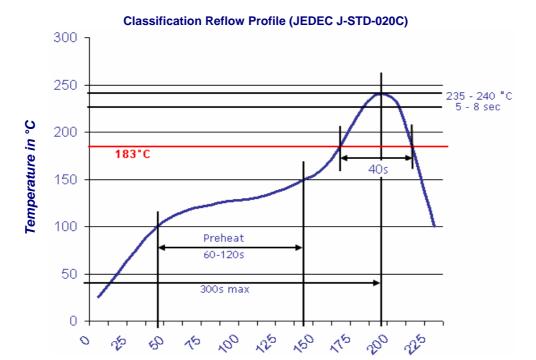

Time in (sec)

SMT Top View LED Green Red

Part No.: **M11G7002**


DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	5 from 9









Packing Specifications

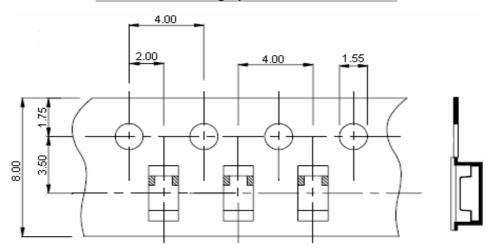

Reel Specifications

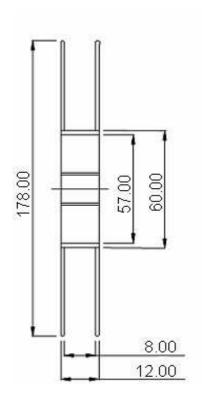

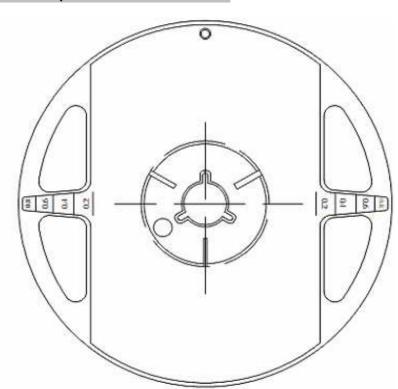

SMT Top View LED Green Red

M11G7002 Part No.:

Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	6 from 9

Copyright by EDCON-COMPONENTS







Handling Precautions

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although ist characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might leads to damage and premature failure of th LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools



2. Do not directly touch or handle the silicone lens surfance. It may damage the internal circuitry.





3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.



SMT Top View LED Green Red

Part No.: **M11G7002**

Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	7 from 9


Copyright by EDCON-COMPONENTS







- 4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
- 5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
- 6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.

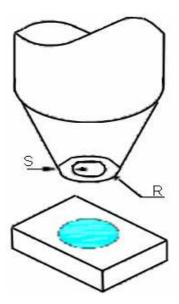

SMT Top View LED
Green Red

Part No.: **M11G7002**


DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	8 from 9







Color table curve

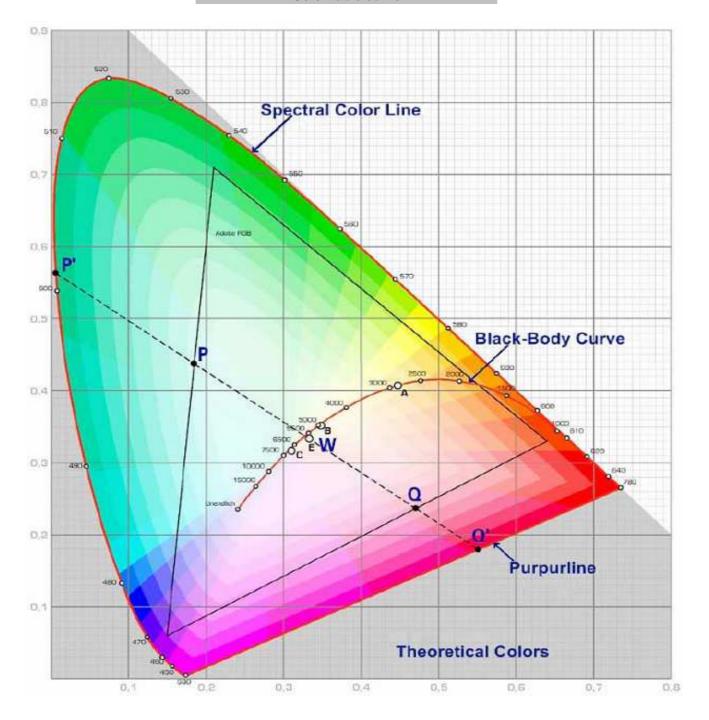

SMT Top	View LED
Green	Red

Part No.: **M11G7002**

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	9 from 9