



# DATA SHEET

## 10Watt High Power LED Low Voltage

**Serie: M15014**

Wavelength **4000= 4000K**

Brightness **0840= 840lm**

Color: **NW= Nature White**

**10Watt High Power LED  
Low Voltage**


Serie No.: **M15014**

Customer:

|       |        |      |        |        |        |           |           |      |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE | 05.01.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. |      | 1 from 14  |



## Technical Dimensions

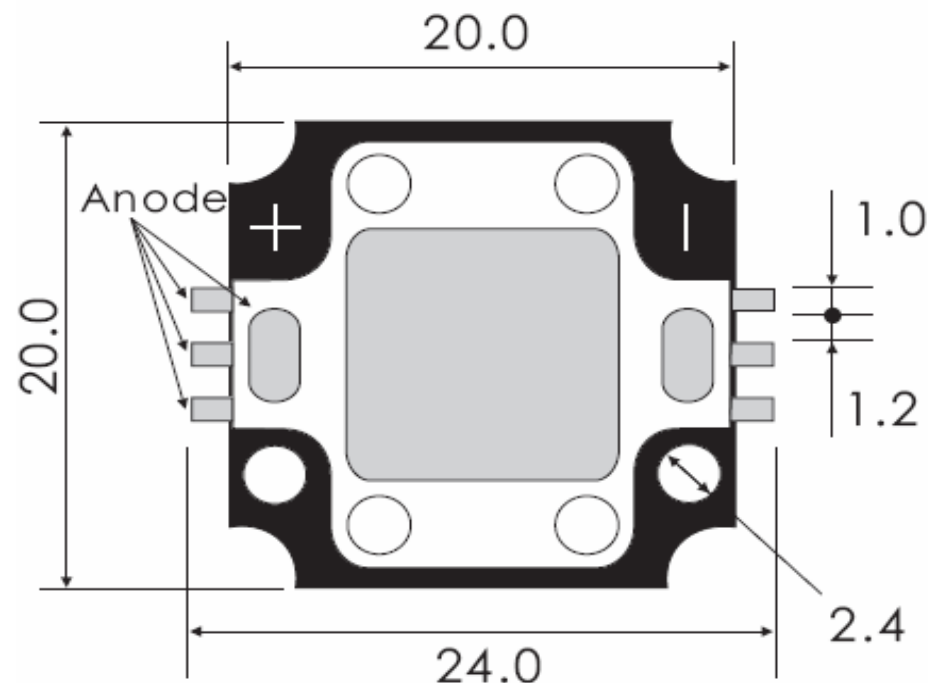

1. All Dimensions are in mm.
2. Lead Spacing in measurement where the lead emerge from the package
3. Protruded resin under flange is 1,5mm max.
4. Tolerance are 0,3mm unless otherwise noted.
5. Specifications are subject to change without notice
6. Driving LED without heat sinking device is forbidden
7. Warps the degree 0,5mm
8. Leds are not designed must to be driven in reverse bias.
9. Proper current derating must be observed to maintain junction temperature below the maximum
10. It is strongly recommended that the temperature of lead be not higher than 55°C.

**10Watt High Power LED  
Low Voltage**

Part No.: **M15014**

Customer:

|       |        |      |        |        |        |           |           |           |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|-----------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE      | 05.01.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 2 from 14 |            |

# EDCON-COMPONENTS



## Features

Long operating life  
 Instant Light  
 Superior ESD defense  
 Low Voltage DC operated  
 Color bright saturated  
 More energy efficient than incandescent and most halogen lamps

## Discription

**EDCON-COMPONENTS High Power LED is make of hi-eff AS/TS GaInN chips with precide package technique which makes excellent heat dissipation to reach the advantages of high lunious efficiency, low decay, and long endurance. Now we have these colors available RED, GREEN, BLU, YELLOW, WHITE.**

## Typical Applications

Decoration Lights  
 Beacon light  
 Bathrooms Light  
 Medical applications  
 Architectural detail lighting

**10Watt High Power LED  
 Low Voltage**

Part No.: **M15014**

|       |        |      |        |        |        |           |           |           |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|-----------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE      | 05.01.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 3 from 14 |            |

Customer:

# EDCON-COMPONENTS



## Absolute Maximum Ratings

| Parameter                     | Symbol | Max. Rating | Unit |
|-------------------------------|--------|-------------|------|
| Continuous Forward Current    | IF     | 1050        | mA   |
| Peak Forward Current *1       | IFM    | 1200        | mA   |
| Electrostatic Discharge (HBM) | ESD    | 4000        | V    |
| LED Junction Temperature      | Tj     | 135         | °C   |
| Operating Temperature         | Topr   | -40 ~ +110  | °C   |
| Storage Temperature           | Tstg   | -40 ~ +120  | °C   |

Manual Soldering Temperature 260°C for 5seconds max . 2

TA=25°C

\*1 Duty Ration = 00,1%, Pulse Width=10us.

\*2 Iron soldering high temperature will not cause damage to the dice. But be aware of the high temperature will make the epoxy soften and the gold wire broken and even open. So before returning to the normal temperatures please avoid any serious pressure on the top of epoxy and lead.

\*3. We suggest using PWM ( Pulse Width Modulation) for driving.

\*4 It is recommended to use series as there are several 3pcs. If there are more than 5pcs, please use product with higher power.

## Electrical- Optical Characteristics

| Parameter                                  | Symbol   | Test Cond. | Min | Typ  | Max. | Unit  |
|--|----------|------------|-----|------|------|-------|
| View Angle of Half Power                   | 2Ø1/2    | IF=1050mA  |     | 120  |      | deg.  |
| Forward Voltage                            | VF       |            |     | 10,5 |      | V     |
| Color Rendering Index for 4000°K           | CRI      |            |     | 75   |      |       |
| Color Rendering Index for 3300°K           | CRI      |            |     | 70   |      |       |
| Thermal Resistance Junction to Case        | RØ J-C   |            |     | 4    |      | °C/W  |
| Temperature Coefficient of Forward Voltage | Δ Vf/Δ T |            |     |      | -.2  | mV/°C |

TA=25°C

**10Watt High Power LED  
Low Voltage**

Part No.: **M15014**

|       |        |      |        |        |        |           |           |           |            |           |
|-------|--------|------|--------|--------|--------|-----------|-----------|-----------|------------|-----------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE      | 05.01.2011 | Customer: |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 4 from 14 |            |           |

# EDCON-COMPONENTS



## Electrical Optical Characteristics for Luminous Intensity

| Emitting Color | Symbol | Test Cond. | Min | Typ | Unit |
|----------------|--------|------------|-----|-----|------|
| Nature White 1 | VF     | IF=1050mA  |     | 743 | lm   |
| Nature White 2 |        |            |     | 796 |      |
| Nature White 3 |        |            |     | 840 |      |
| Nature White 4 |        |            |     | 880 |      |

## Electrical-Optical Characteristics for Wavelength

### Endurance Test

| Test Item                                    | Reference Standard                                      | Test Conditions  | Result |
|--|---|--|--------|
| Operating Life                               | MIL-STD-750:1026<br>MIL-STD-883:1005<br>JIS-C-7021: B-1 | Connect with a power if=700mA<br>Ta=Under room temperature<br>Trest Time = 1000hrs | 0/22   |
| High Temperature<br>High Humidity<br>Storage | MIL-STD-202:103B<br>JIS-C-7021: B-11                    | Ta= +85°C +/-5°C<br>RH=80% ~ 85%<br>Test Time = 1000hrs                            | 0/22   |
| High Temperature<br>Storage                  | MIL-STD-883:1008<br>JIS-C-7021: B-10                    | High Ta= +120°C +/- 5°C<br>Test Time= 1000hrs                                      | 0/22   |
| Low Temperature<br>Storage                   | JIS-C-7021: B-12  | Low Ta= 40°C +/-5°C<br>Test Time= 1000hrs  | 0/22   |

### Failure Criteria:

1. VF arise ≥10%
2. IV decline ≥30%
3. A failure is an LED that is open or shorted

Tolerance: 15% of EDCON- measuring equipments: EXELTRON  
2001.2.S370 made by U.D.T:

TA=25°C

**10Watt High Power LED  
Low Voltage**

Part No.: **M15014**

|       |        |      |        |        |        |           |           |           |            |           |
|-------|--------|------|--------|--------|--------|-----------|-----------|-----------|------------|-----------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE      | 05.01.2011 | Customer: |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 5 from 14 |            |           |

[www.edcon-components.com](http://www.edcon-components.com)

email: info@edcon-components.com

# EDCON-COMPONENTS





## Color Range and Bin Selection

| CCT (K)<br>TYP | Chromaticity Coordinates |       |       |           |       |
|----------------|--------------------------|-------|-------|-----------|-------|
|                | 4000                     | x     | 0,367 | 0,420     | 0,396 |
| y              |                          | 0,400 | 0,432 | 0,367     | 0,342 |
| Tolerance      | X +/-0,02                |       |       | Y +/-0,02 |       |

| Color Temperature | Lens Color      | Dice Source | Color (K) |
|-------------------|-----------------|-------------|-----------|
| Nature White 1    | White Diffusion | GaInN/GaN   | 4000      |
| Nature White 2    |                 |             |           |
| Nature White 3    |                 |             |           |
| Nature White 4    |                 |             |           |

## Pure White CIE Light Color Chart

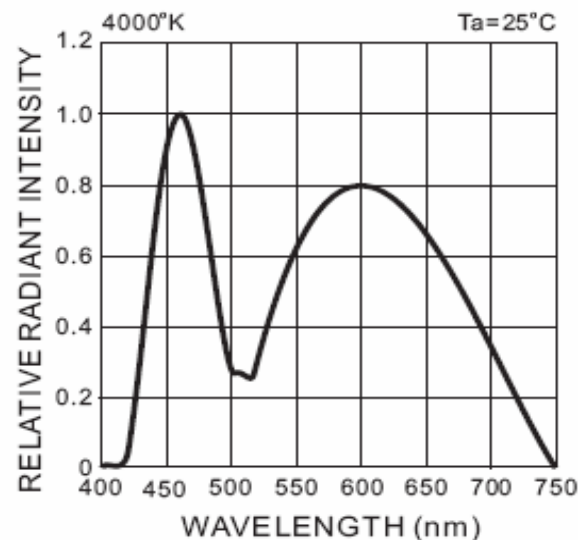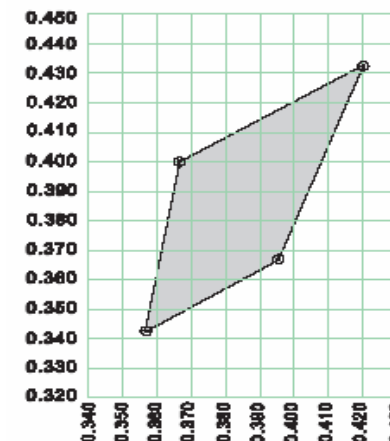

## Environmental Test

| Test Item           | Reference Standard | Test Conditions   | Result |
|---------------------|--------------------|---|--------|
| Temperature Cycling | MIL-STD-202:107D   | -.40°C ~ +25°C ~ +85°C ~ +25°C<br>60min 20min 60min 20min<br>Test Time= 200cycles | 0/22   |
|                     | MIL-STD-750:1051   |   |        |
|                     | MIL-STD-833:1010   |   |        |
|                     | JIS-C-7021: A4     |   |        |
| Thermal Shock       | MIL-STD-202:107D   | . -40°C +/- 5°C ~ +110°C +/-5°C<br>20min 20min.<br>Test Time= 200cycles           | 0/22   |
|                     | MIL-STD-750:1051   |   |        |
|                     | MIL-STD-833:1010   |   |        |

### Failure Criteria:

1. VF arise  $\geq 10\%$
2. IV decline  $\geq 30\%$
3. A failure is an LED that is open or shorted

**10Watt High Power LED  
Low Voltage**



Part No.: **M15014**

|       |        |      |        |        |        |           |           |           |            |           |
|-------|--------|------|--------|--------|--------|-----------|-----------|-----------|------------|-----------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE      | 05.01.2011 | Customer: |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 6 from 14 |            |           |

# EDCON-COMPONENTS



## Typical Electrical Optical Characteristics Curves

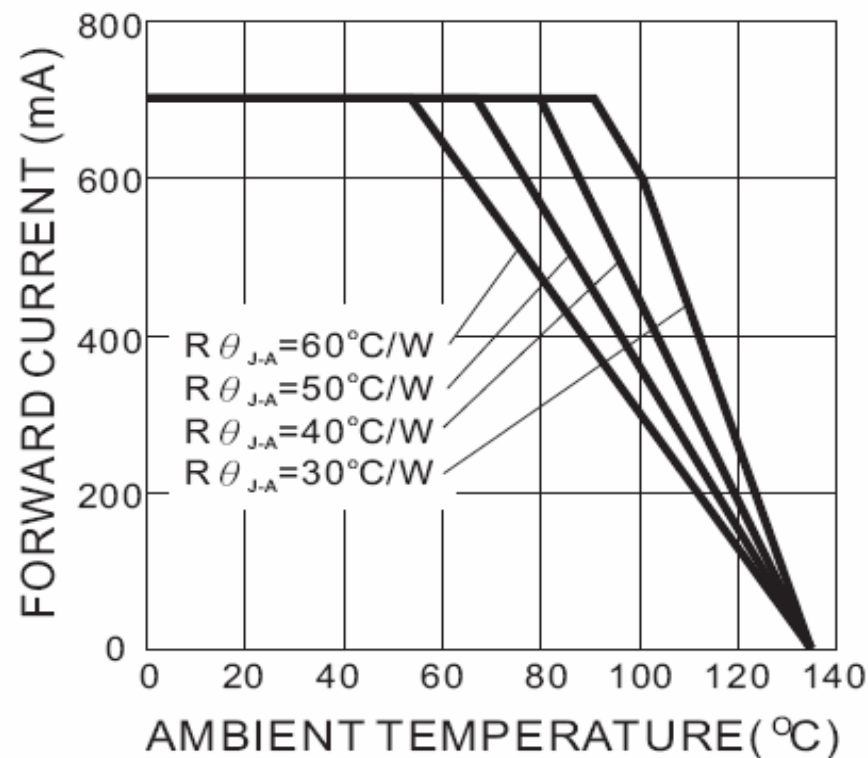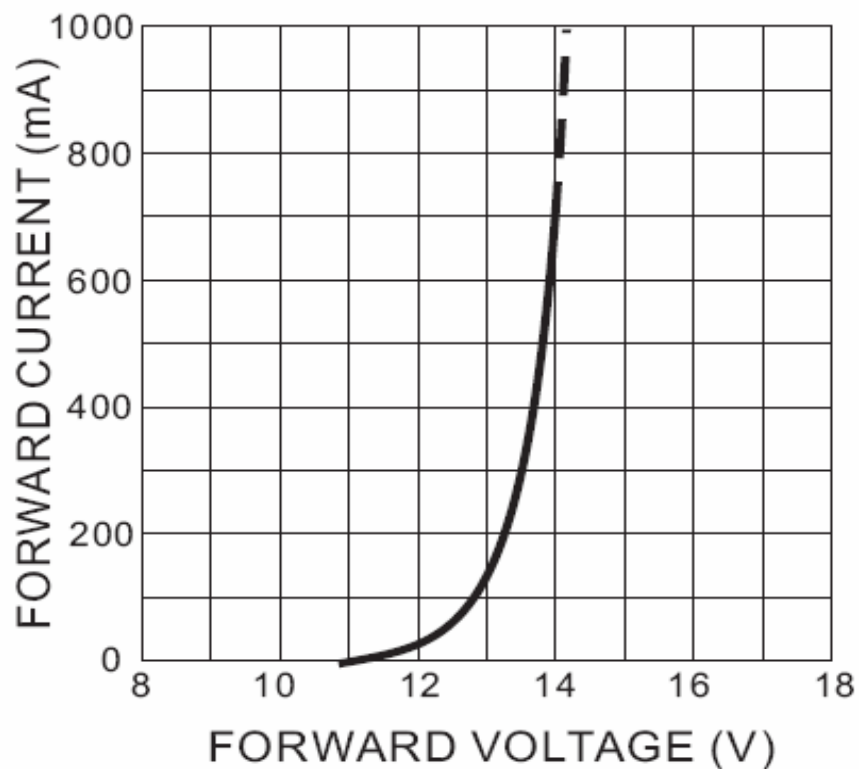

**10Watt High Power LED  
Low Voltage**


Part No.: **M15014**

|       |        |      |        |        |        |           |           |           |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|-----------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE      | 05.01.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 7 from 14 |            |

Customer:



## Typical Electrical Optical Characteristics Curves

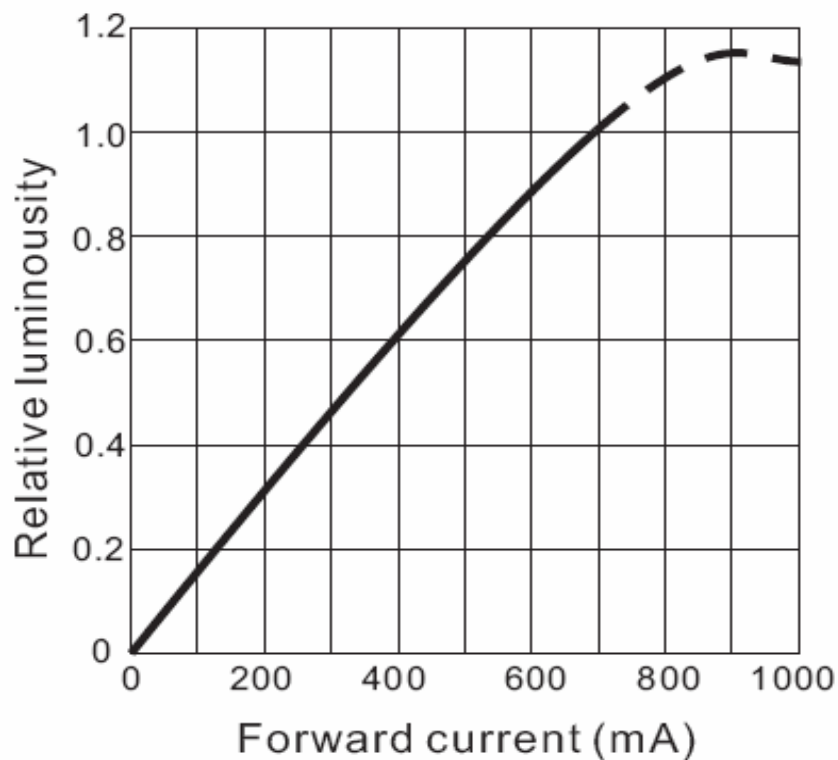

**10Watt High Power LED  
Low Voltage**

Part No.: **M15014**




|       |        |      |        |        |        |           |           |           |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|-----------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE      | 05.01.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 8 from 14 | Customer:  |



# EDCON-COMPONENTS



## Typical Electrical Optical Characteristics Curves

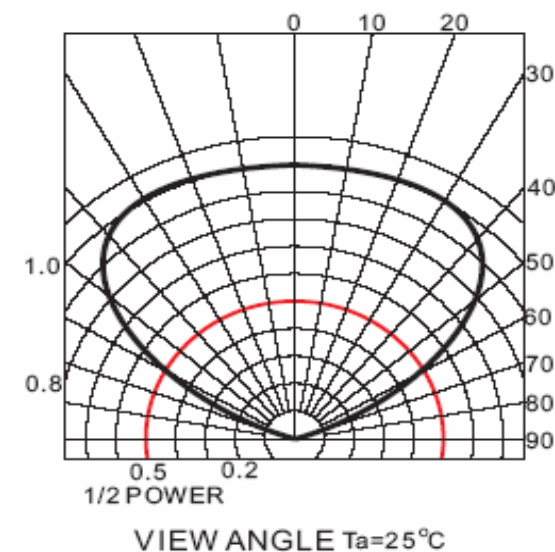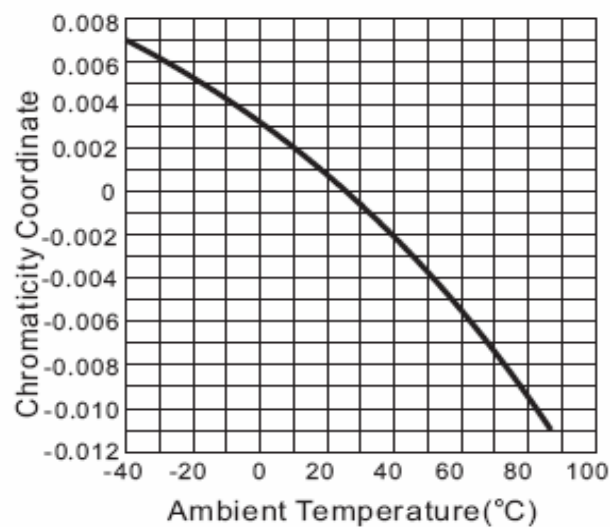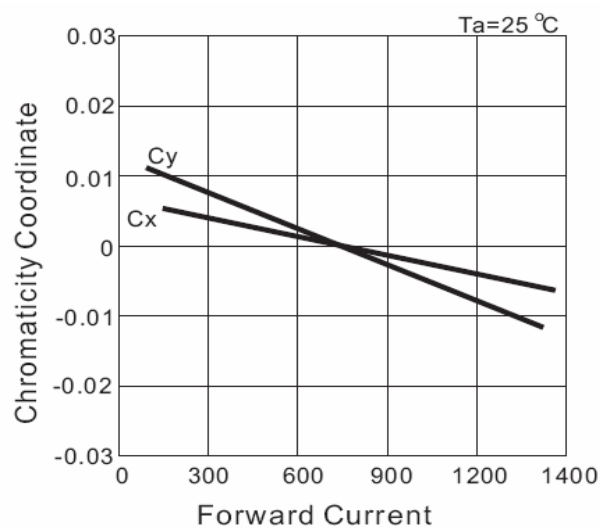

**10Watt High Power LED  
Low Voltage**

Part No.: **M15014**


|       |        |      |        |        |        |           |           |           |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|-----------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE      | 05.01.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 9 from 14 | Customer:  |

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)



## Mounting Explanation

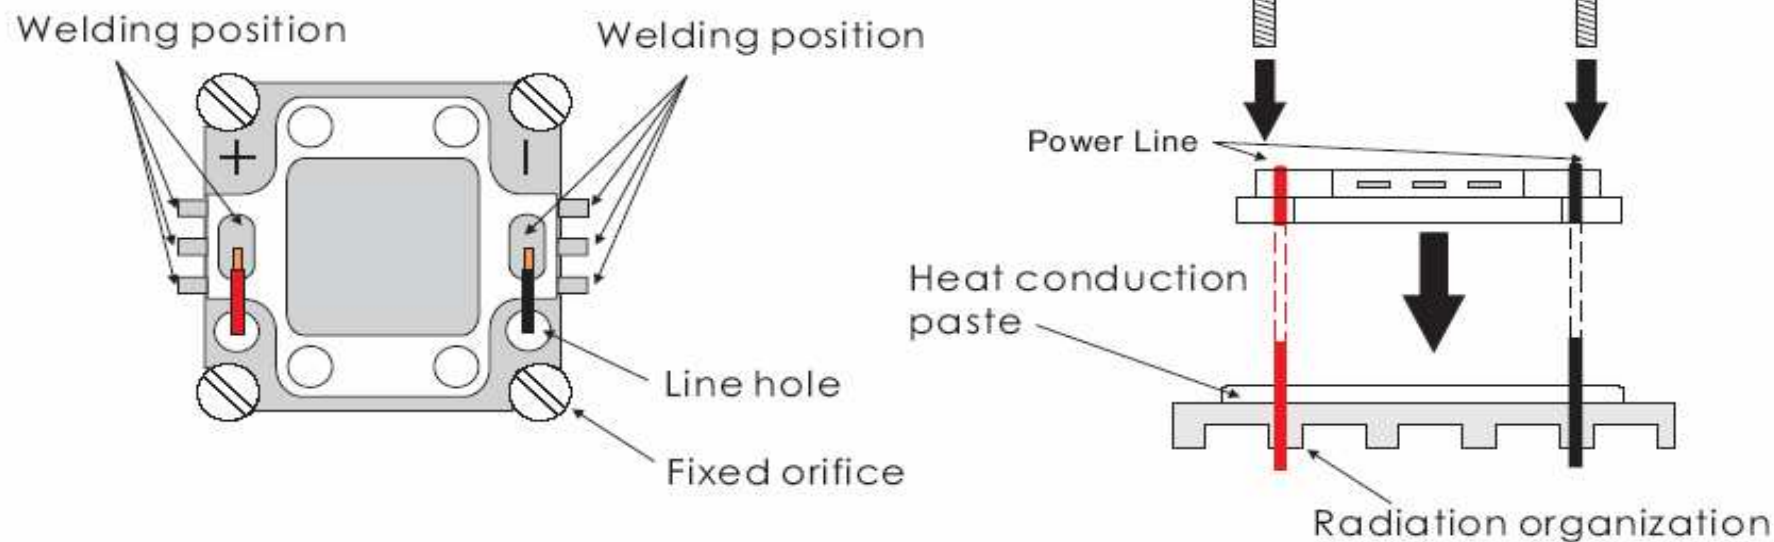

EDCON-COMPONENTS provide simple comparison table for High Power LED, you could find your request heat dissipation area from the following table.

|  |               |
|--|---------------|
| <b>10Watt High Power LED<br/>Low Voltage</b> |               |
| Part No.:                                    | <b>M15014</b> |
| Customer:                                    |               |

|       |        |      |        |        |        |           |           |            |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|------------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE       | 05.01.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 10 from 14 |            |

# EDCON-COMPONENTS



## Conclusion



|                                 |        |
|---------------------------------|--------|
| Free Convection Horizontal      |        |
| Flat Heat Dissipation Set-up    |        |
| (Area Require mm <sup>2</sup> ) |        |
| White                           | 13,500 |

|                                 |        |
|---------------------------------|--------|
| Free Convection Vertical        |        |
| Flat Heat Dissipation Set-up    |        |
| (Area Require mm <sup>2</sup> ) |        |
| White                           | 10,000 |

|                                 |        |
|---------------------------------|--------|
| Free Convection                 |        |
| Finned Heat dissipation Set-up  |        |
| (Area Require mm <sup>2</sup> ) |        |
| White                           | 46,500 |

TAB in this table is according to highest operating temperature 65°C

Different materials of second heat dissipation device, the surface area of heat sink will be different. Thus, this document is for reference only.

**10Watt High Power LED  
Low Voltage**

Part No.: **M15014**

|       |        |      |        |        |        |           |           |            |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|------------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE       | 05.01.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 11 from 14 | Customer:  |

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Operating Instructions



It is important to keep away the product from the water, in order to avoid the product electronic characteristics to be harmful.



Above 150°C



There is 150°C directly from the front of Power LED emitting diode. It is untouchable to prevent burning.



It should be noticed whether there is convection in design of device. Convection has to exist.



The material in the central top of POWER LED is soft. Therefore, it is unscratchable and untouchable.




Keep Insulation



Power Supply

In the button of heat sink cannot be touched with neither positive nor negative pole. (Heat sink has to be insulation)

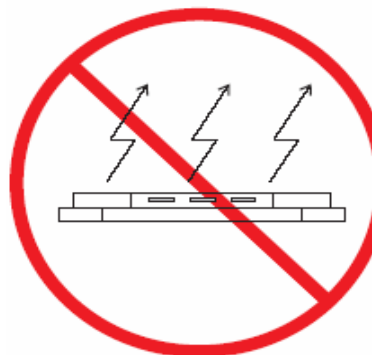

The product should not be lit up directly without a heat dissipation device.



When making use of products, it is necessary to use anti-ESD devices to prevent destructive electronic characteristics.

**10Watt High Power LED  
Low Voltage**

Part No.: **M15014**

|       |        |      |        |        |        |           |           |            |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|------------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE       | 05.01.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 12 from 14 | Customer:  |


[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## TAB Temperature LIFE Characteristics Curve

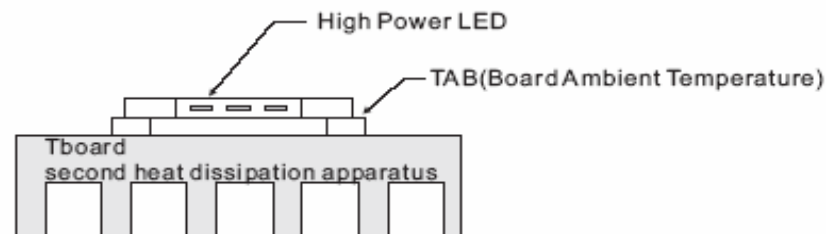

Board Ambient Temperature Tolerance 5°C  
 TAB in this table is according to highest operating temperature 65°C  
 The TAB is the stable testing value for the product lighted 100% after one hour  
 Different materials of second heat dissipation device, the surface area of heat sink will be different,  
 Thus, this document is for reference only.

**10Watt High Power LED  
 Low Voltage**

Part No.: **M15014**

|       |        |      |        |        |        |           |           |            |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|------------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE       | 05.01.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 13 from 14 | Customer:  |

# EDCON-COMPONENTS



## Ordering Informations

| Serie | Emitting Color | (Kelvin) | Brightness | ROHS | Packing Code |  |  |  |  |  |
|-------|----------------|----------|------------|------|--------------|--|--|--|--|--|
|-------|----------------|----------|------------|------|--------------|--|--|--|--|--|

|               |           |             |             |          |           |  |  |  |  |  |
|---------------|-----------|-------------|-------------|----------|-----------|--|--|--|--|--|
| <b>M15014</b> | <b>NW</b> | <b>4000</b> | <b>0840</b> | <b>R</b> | <b>BU</b> |  |  |  |  |  |
|---------------|-----------|-------------|-------------|----------|-----------|--|--|--|--|--|

|                         |                    |                    |                            |                         |  |  |
|-------------------------|--------------------|--------------------|----------------------------|-------------------------|--|--|
| <b>NW=</b> Nature White | <b>4000=</b> 4000K | <b>0840=</b> 840lm | <b>R=</b> ROHS Conform     | <b>BU=</b> Bulk Ware    |  |  |
|                         |                    |                    | <b>N=</b> NON ROHS Conform | <b>TY=</b> Tray Packing |  |  |

**10Watt High Power LED  
Low Voltage**

Part No.: **M15014**

|       |        |      |        |        |        |           |           |      |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE | 05.01.2011 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. |      | 14 from 14 |

Customer: