



EDCON-COMPONENTS






SPECIFICATION:

Current Rating: 50mA / 12VDC
 Insulator Resistance: 100M Ohm min DC250VDC
 Dielectric Withstanding: 250VAC for 1 min.
 Operating Temperature: . -10°C ~ +60°C
 Contact Resistance: 100 milli Ohm max.
 Travel: 0,13mm (+/- 0,05mm)

Drawing

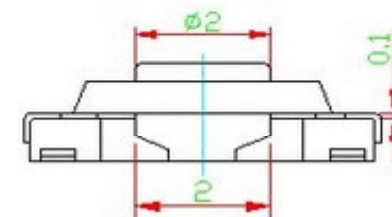

P.C.B Layout

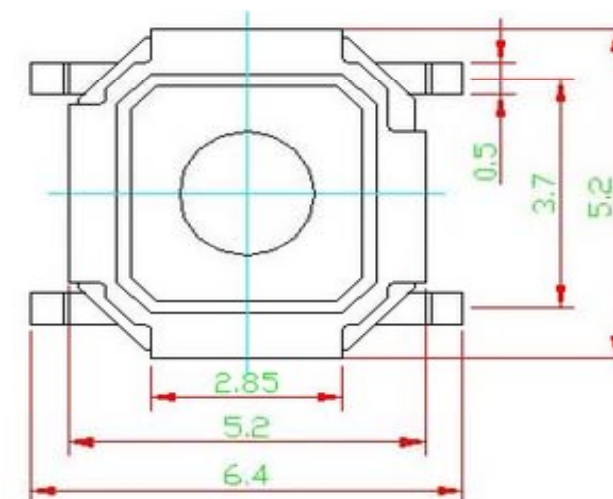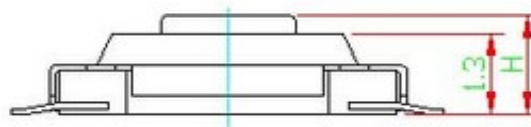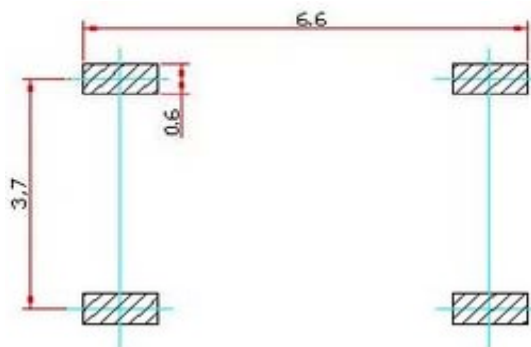

SMT Tact Switch	
5,2x5,2x,XXmm	
Part No.:	Q12024
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.08.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Fill with 0	Operating Force	Polarisation Peg	Electrical life	Fill with 0	ROHS	Packing		
Q12024	008	X	161	N	503	X	R	TR		

008 = 0,8mm
015 = 1,5mm
016 = 1,6mm
017 = 1,7mm
018 = 1,8mm
020 = 2,0mm
023 = 2,3mm
025 = 2,5mm
030 = 3,0mm
032 = 3,2mm
035 = 3,5mm
038 = 3,8mm
040 = 4,0mm
043 = 4,3mm
050 = 5,0mm

161 = 161gr	N = without Peg	503 = 50000 Cycles
261 = 260gr		104 = 10000 Cycles

N = non ROHS	BU = Bulk Ware
R = ROHS conform	TY = Tray Packing
	TR = Tape/Reel Packing


SMT Tact Switch 5,2x5,2x,XXmm	
Part No.:	Q12024
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.08.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3


EDCON-COMPONENTS



Soldering Profile for Lead Soldering

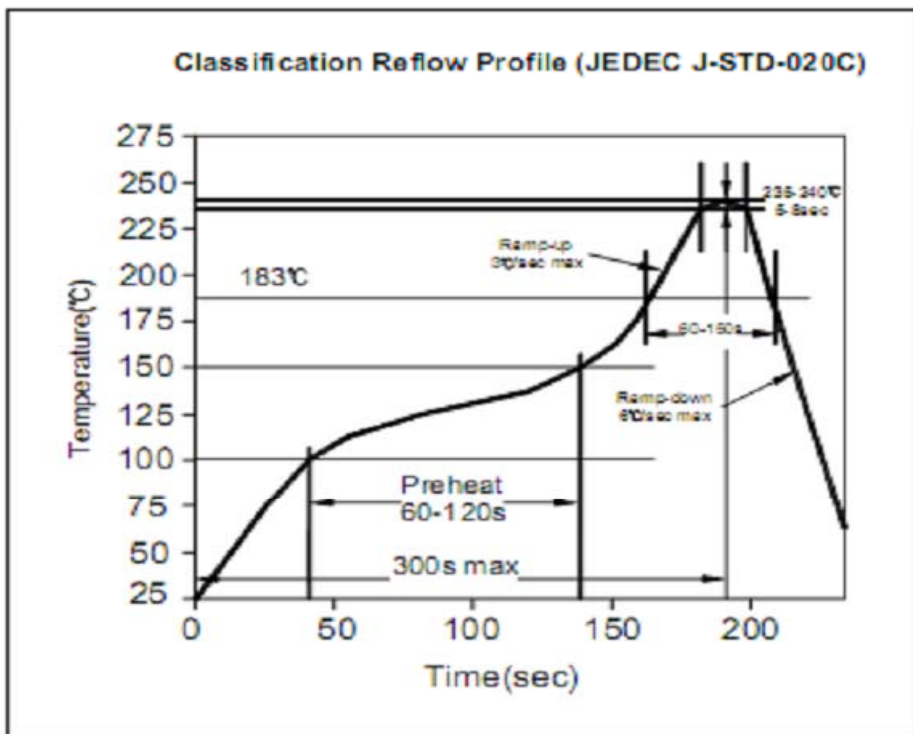

Soldering Profile for Lead Free Soldering

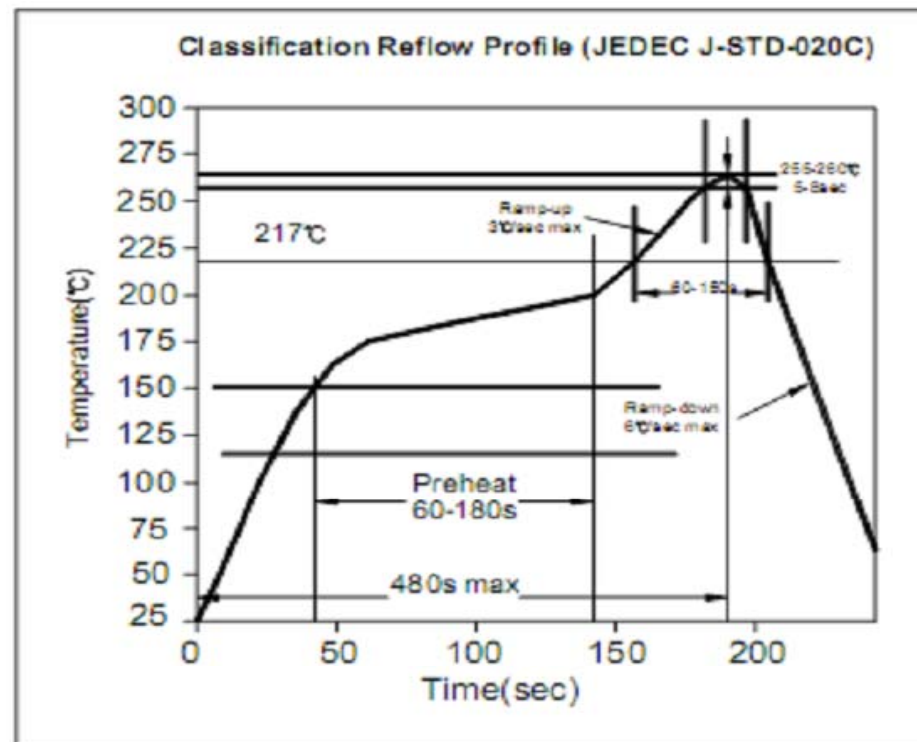

SMT Tact Switch	
5,2x5,2x,XXmm	
Part No.:	Q12024
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.08.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	

www.edcon-components.com

email: info@edcon-components.com