

EDCON-COMPONENTS




Contact




SPECIFICATION:

Working Current:	16A
Working Voltage:	250V
Rated Impulse Voltage:	4KV
Isolation Resistance:	> 1010 Ohm
Temperature Range:	.-40°C to + 125°C
Flammability acc.	VO (UL94)
Cable Mounting:	Screw


Technical Drawing

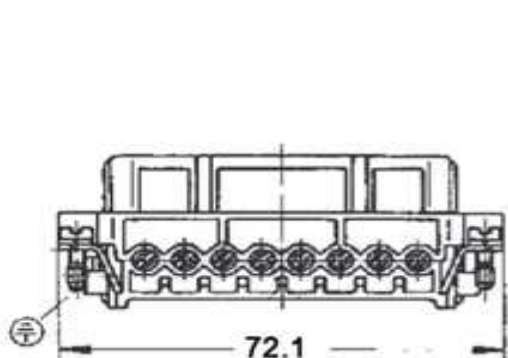

Distance for contact max.24mm



Contacts arrangement view from termination side

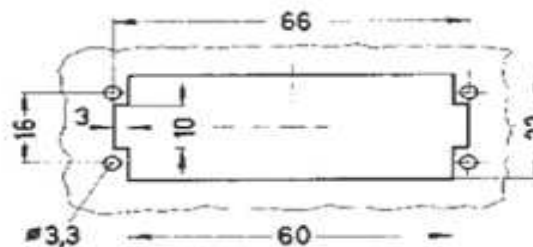

Panel cut out for inserts for use without Hoods/housings

Heavy Connector Serie 0914

Part No.: **0914001**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.08.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2		

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Contact



Ordering Informations

Serie	Pos	Connecting	ROHS	Packing						
0914001	16	F	R	CA						

16= 16Pos.	F= Female	R= ROHS Conform	CA= Carton						
		N= NON ROHS Conform							

Heavy Connector Serie 0914
Part No.: 0914001
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.02.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2