

EDCON-COMPONENTS







Contact



SPECIFICATION:

Working Current: 16A
 Working Voltage: 250V
 Rated Impulse Voltage: 4KV
 Isolation Resistance: > 1010 Ohm
 Temperature Range: -40°C to + 125°C
 Flammability acc. VO (UL94)
 Cable Mounting: Screw

Technical Drawing

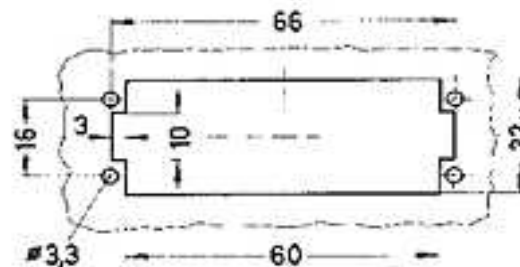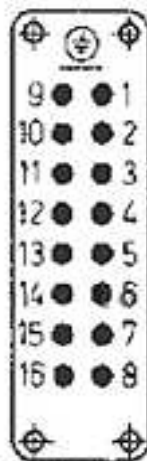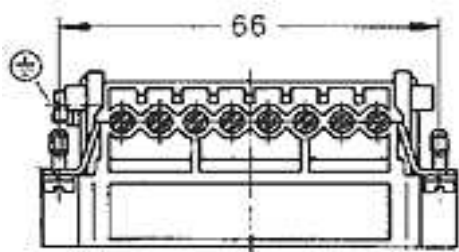

1) 接插体之间最大距离24mm
 Distance for contact max.24mm

接插针排序
 Contacts arrangement view
 from termination side

面板安装开孔图
 Panel cut out for inserts
 for use without Hoods/housings

Heavy Connector Serie 0914

Part No.: **0914002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.08.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

Customer:

EDCON-COMPONENTS



Contact



Ordering Informations

Serie	Pos	Connecting	ROHS	Packing						
0914002	16	M	R	CA						

16= 16Pos.	M= Male	R= ROHS Conform	CA= Carton						
		N= NON ROHS Conform							

Heavy Connector Serie 0914
Part No.: 0914002
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.02.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2