

EDCON-COMPONENTS




Contact




SPECIFICATION:

Working Current: 16A
 Working Voltage: 500V
 Rated Impulse Voltage: 6KV
 Isolation Resistance: > 1010 Ohm
 Temperature Range: -40°C to + 125°C
 Flammability acc. VO (UL94)


Technical Drawing

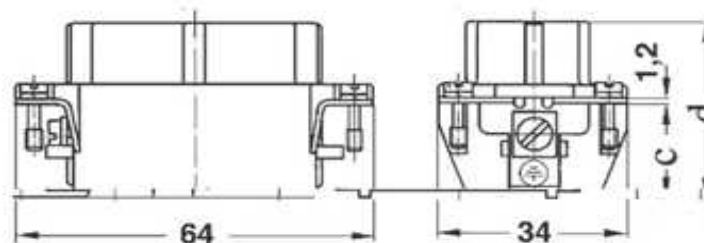

Distance to contact max. 21mm

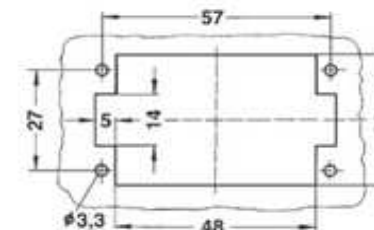

panel cut out

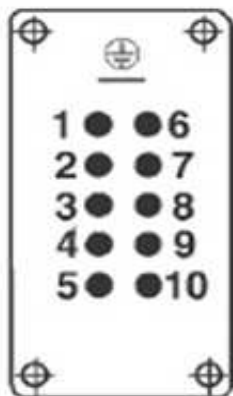

Contact arrangement view from termination side

	a	b	c	d
M/F	18	33	18	35
MC/FC	19	34	19	36
MS/FS	19	34	19	36
MSS/FSS	34	49	32	49
Distance for contact max. 21mm				

Heavy Connector Serie HE-10
Part No.: 0917001
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.08.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

EDCON-COMPONENTS



Contact



Ordering Informations

Serie	Pos	Connecting	ROHS	Packing						
0917001	06	F	R	CA						

06= 06Pos.	F= Female	R= ROHS Conform	CA= Carton						
		N= NON ROHS Conform							

Heavy Connector Serie HE-10	
Part No.:	0917001
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.08.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2