

# EDCON-COMPONENTS




**Contact**




## SPECIFICATION:

Working Current: 16A  
 Working Voltage: 500V  
 Rated Impulse Voltage: 6KV  
 Isolation Resistance: > 1010 Ohm  
 Temperature Range: -40°C to + 125°C  
 Flammability acc. VO ( UL94)


## Technical Drawing

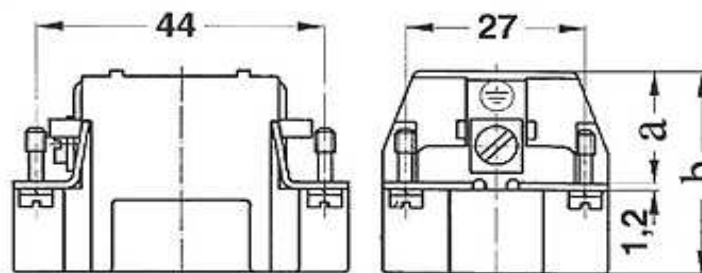

Distance to contact max. 24mm



Panel Cutout



Contact arrangement view from termination side

	a	b	c	d
M / F	18	33	18	35
MC / FC	19	34	19	36
MS / FS	19	34	19	36
MSS / FSS	34	49	32	49

Distance to contact max. 21mm

**Heavy Connector Serie HE-06**

Part No.: **0918002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.08.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

Customer:  
 email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



**Contact**



## Ordering Informations

Serie	Pos	Connecting	ROHS	Packing						
<b>0918002</b>	<b>06</b>	<b>M</b>	<b>R</b>	<b>CA</b>						

<b>06= 06Pos.</b>	<b>M= Male</b>	<b>R= ROHS Conform</b>	<b>CA= Carton</b>						
		<b>N= NON ROHS Conform</b>							

<b>Heavy Connector Serie HE-06</b>	
Part No.:	<b>0918002</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.08.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2