

EDCON-COMPONENTS




Contact



SPECIFICATION:

Working Current: 16A
 Working Voltage: 500V
 Rated Impulse Voltage: 6KV
 Isolation Resistance: > 1010 Ohm
 Temperature Range: -40°C to + 125°C
 Flammability acc. VO (UL94)

Technical Drawing

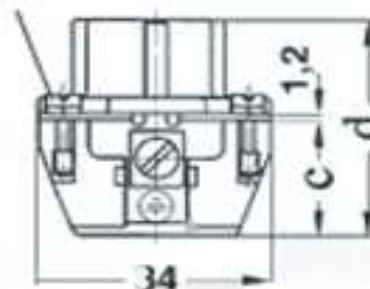


Distance to contact max. 21mm




	a	b	c	d
M /F	18	33	18	35
MC /FC	19	34	19	36
MS /FS	19	34	19	36
MSS/FSS	34	49	32	49

Distance to contact max. 21mm

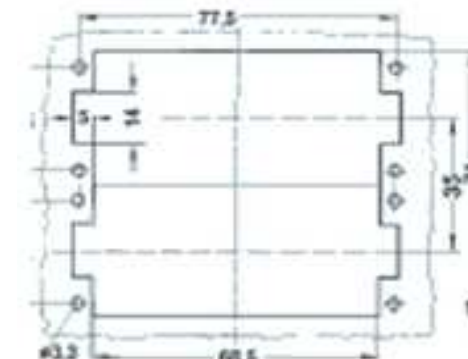

Panel Cutout



Contact arrangement view from termination side

Heavy Connector Serie HE-032

Part No.: **0921001**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.08.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	Customer:

EDCON-COMPONENTS



Contact



Ordering Informations

Serie	Pos	Connecting	ROHS	Packing						
0921001	32	F	R	CA						

32= 32Pos.	F= Female	R= ROHS Conform	CA= Carton						
		N= NON ROHS Conform							

Heavy Connector Serie HE-032	
Part No.:	0921001
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.08.2010
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 2