

EDCON-COMPONENTS




Contact




SPECIFICATION:

Working Current:	16A
Working Voltage:	500V
Rated Impulse Voltage:	6KV
Isolation Resistance:	> 1010 Ohm
Temperature Range:	.-40°C to + 125°C
Flammability acc.	VO (UL94)

Technical Drawing

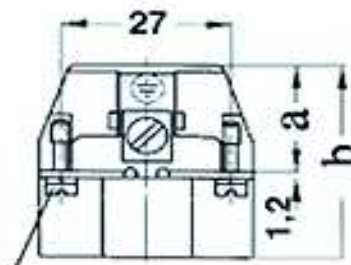


Distance to contact max. 21mm

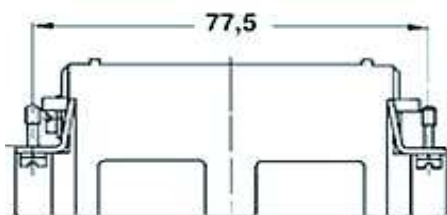


	a	b	c	d
M /F	18	33	18	35
MC /FC	19	34	19	36
MS /FS	19	34	19	36
MSS/FSS	34	49	32	49

Distance to contact max. 21mm

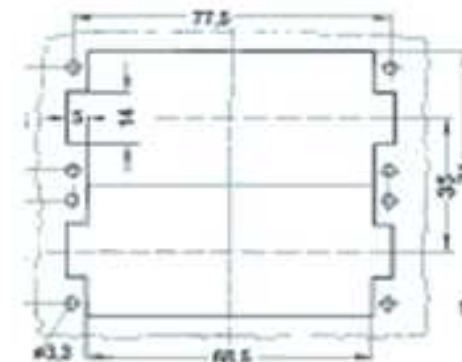

Panel Cutout



Contact arrangement view from termination side

Heavy Connector Serie HE-032

Part No.: **0921002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.08.2010	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2		

EDCON-COMPONENTS



Contact



Ordering Informations

Serie	Pos	Connecting	ROHS	Packing						
0921002	32	F	R	CA						

32= 32Pos.	F= Female	R= ROHS Conform	CA= Carton						
		N= NON ROHS Conform							

Heavy Connector Serie HE-032	
Part No.:	0921002
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.08.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2