

EDCON-COMPONENTS




Contact





SPECIFICATION:

Working Current: 16A
 Working Voltage: 500V
 Rated Impulse Voltage: 6KV
 Isolation Resistance: > 1010 Ohm
 Temperature Range: -40°C to + 125°C
 Flammability acc. VO (UL94)
 Cable Mounting: Crimp


Technical Drawing

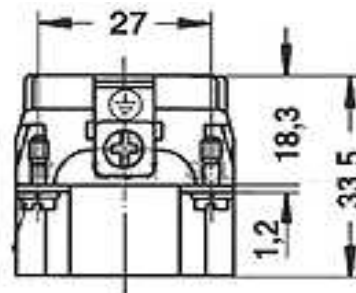

Distance to contact max. 21mm

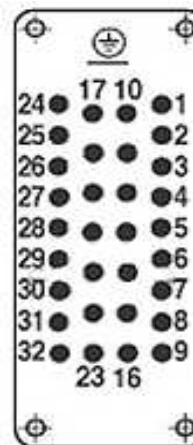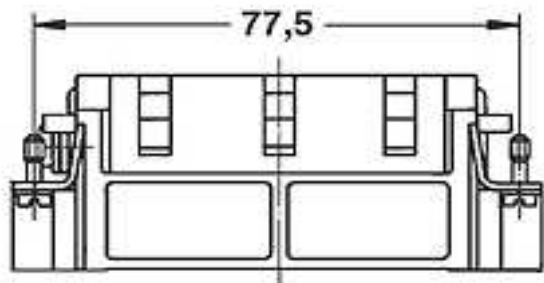

Contact arrangement view from termination side

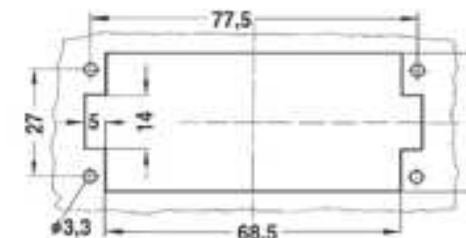

Panel cut out

**Heavy Connector Serie
HEE-032**

Part No.: **0925002**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

EDCON-COMPONENTS



Contact



Ordering Informations

Serie	Pos	Connecting	ROHS	Packing						
0925002	32	M	R	CA						

32= 32Pos.	M=Male	R= ROHS Conform	CA= Carton						
		N= NON ROHS Conform							

Heavy Connector Serie
HEE-032
Part No.: 0925002
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2