

# EDCON-COMPONENTS




**Contact**





## SPECIFICATION:

Working Current: 35A  
 Working Voltage: 400V/690V  
 Rated Impulse Voltage: 6KV  
 Isolation Resistance: > 1010 Ohm  
 Temperature Range: -40°C to + 125°C  
 Flammability acc. VO ( UL94)  
 Cable Mounting: Screw type


## Technical Drawing



Distance to contact max. 21mm

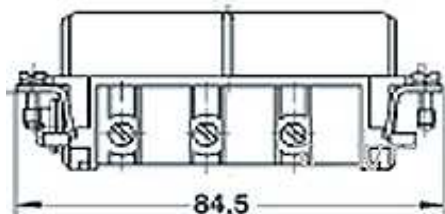

Contact arrangement view from termination side

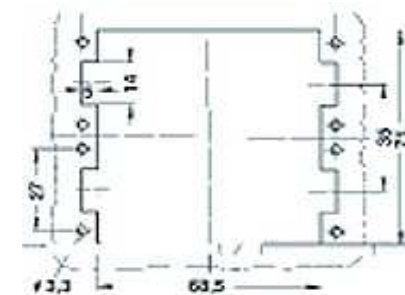

Panel cut out

**Heavy Connector Serie  
 HSB-012**

Part No.: **0954001**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	Customer:

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



**Contact**



## Ordering Informations

Serie	Pos	Connecting	ROHS	Packing						
<b>0954001</b>	<b>12</b>	<b>F</b>	<b>R</b>	<b>CA</b>						

12= 12Pos.	F= Female	R= ROHS Conform	CA= Carton						
		N= NON ROHS Conform							

<b>Heavy Connector Serie</b> <b>HSB-012</b>
Part No.: <b>0954001</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2010
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 2