

EDCON-COMPONENTS




Contact





SPECIFICATION:

Working Current:	80A
Working Voltage:	830V
Rated Impulse Voltage:	8KV
Isolation Resistance:	> 1010 Ohm
Temperature Range:	.-40°C to + 125°C
Flammability acc.	VO (UL94)
Cable Mounting:	Crimp type


Technical Drawing



Distance to contact max. 21mm

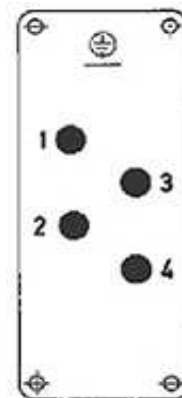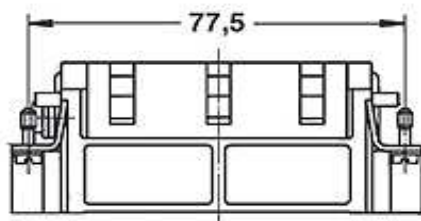

Contact arrangement view from termination side

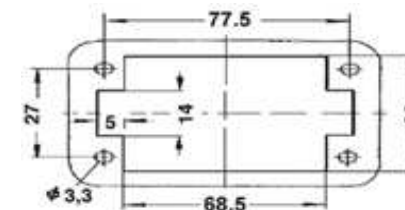

Panel cut out

Heavy Connector Serie HK-4/0

Part No.: **0964002**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Contact



Ordering Informations

Serie	Pos	Connecting	ROHS	Packing						
0964002	4	M	R	CA						

4= 4Pos.	M= Male	R= ROHS Conform	CA= Carton						
		N= NON ROHS Conform							

Heavy Connector Serie HK-4/0
Part No.: 0964002
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2