

EDCON-COMPONENTS




Contact




SPECIFICATION:

Working Current: 16A
 Working Voltage: 500V
 Rated Impulse Voltage: 6KV
 Isolation Resistance: > 1010 Ohm
 Temperature Range: -40°C to + 125°C
 Flammability acc. VO (UL94)
 Cable Mounting: Screwless Contact

Technical Drawing

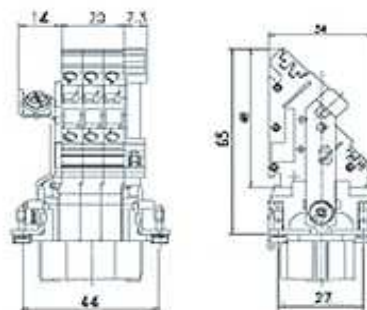

Type right Hand version Code L

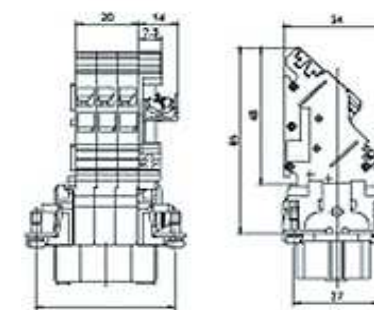

Type right Hand version Code R

**Heavy Connector Serie
HEAV-006**

Part No.: **0970001**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 10.08.2010 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 1 from 2 | Customer: |

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Contact



Ordering Informations

| Serie | Pos | Connecting | ROHS | Packing | | | | | | |
|----------------|----------|------------|----------|-----------|--|--|--|--|--|--|
| 0970001 | 6 | L | R | CA | | | | | | |

| 6= 6Pos. | L= Left Hand Version | R= ROHS Conform | CA= Carton | | | | |
|----------|-----------------------|---------------------|------------|--|--|--|--|
| | R= Right Hand Version | N= NON ROHS Conform | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

| | |
|---|----------------|
| Heavy Connector Serie HEAV-006 | |
| Part No.: | 0970001 |
| Customer: | |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-------|-----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 10.08.2010 |
| APPD: | Schumi | | | FINISH | Jamy | | | Sheet No. | 2 from 2 |