

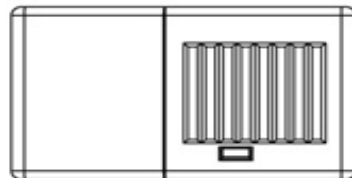
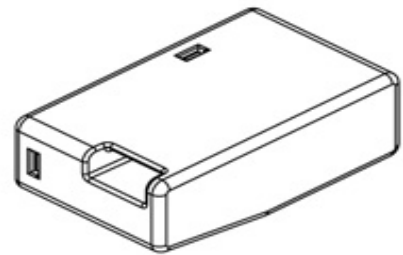
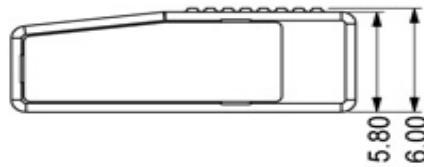
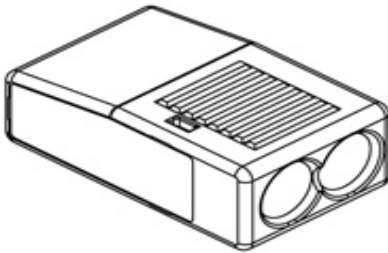



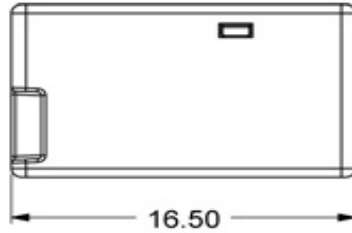

Technical Specification

Voltage:	450V	Material	
Curent	24A	Housing:	Polycarbonate(V2)
wire Size:	0,5-2,5 rigid		Polypropylene (V2)
UL-wire Size:	AWG 20-14 Solid/Strang	Terminal Body:	Steel, Bass
Temperature Range:	-40°C to + 110°C		Stainless Steel
		Finish	Tin-Plated

Approvals



Ordering Information

Serie	No. of Pos.	Color	ROHS	Packing		
A16008	2	TC	R	B1		

2= 2Pos.		N= non ROHS	B1= Bulk-Ware 100PCS
		R= ROHS	
			B5= Bulk-Ware 500PCS
			B10= Bulk-Ware 1000PCS
	TC= Transparency		

Push - In- Wire Connector	
Part No.:	A16008
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	DATE	21.11.2016
APPD:	Schumi			FINISH	Jamy	Sheet	1 from 1