




Applications

Automotive Dashbord Lighting
 Money Detector
 Back Lighting
 Other Lighting


Features

High Luminous PLCC2 TOP LED
 3,5x2,8x1,9mm Standard Directivity
 Superior Weather-resistance
 UV Resistant Silicon
 Water Clear Type

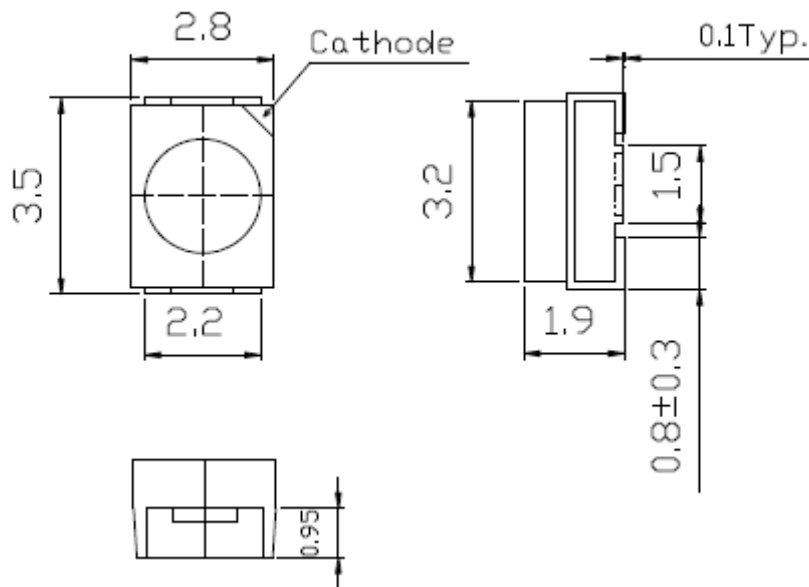

Recommended Soldering Pattern

It's not recommended this area has any print

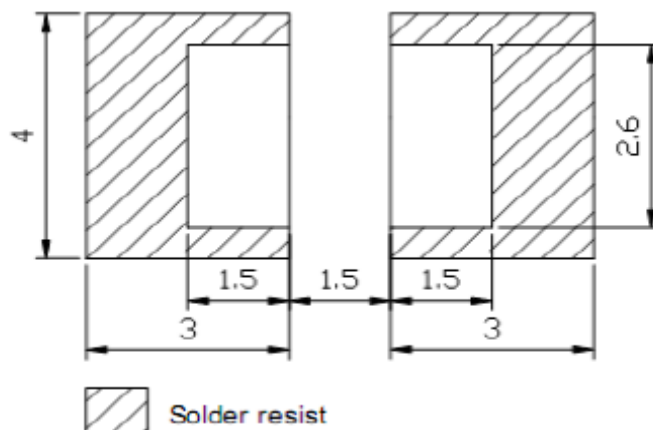


Notes :

All dimensions in mm tolerance is ± 0.1 mm unless otherwise noted.

SMT Top View LED UltraViolett	
Part No.:	M12001
Customer:	

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.01.2011
APPD:	Ping			FINISH	Hui	Sheet	1 from 8



Absolute Maximum Ratings

Ta=25°C

Item	Symbol	0	Unit
Power Dissipation	P _D	114	mW
DC Forward Current	I _F	30	mA
Pulsed Forward Current	I _{FP} *	100	mA
Reverse Voltage	V _R	5	V
Operating Temperature	T _{OP}	-30 to +85	°C
Storage Temperature	T _{ST}	-40 to +100	°C

* 0.1 msec pulse, 10% duty cycle

Electrical / Optical Characteristics

I_F=5mA Ta=25°C

Ermitting Color	Ultra Violet		
Forward Voltage	typ.	3,4	V _F
	max.	3,8	V _F
Wavelength typ.	λ _D	390	nm
	λ _P	395	nm
	Δλ	20	nm
Color Temperature	min.		K
	max.		K
Luminous Intensity *	min.		mcd
	typ.		mcd
Reverse Current	max.	10	μA
Viewing Angle	2Θ1/2	120	° deg.


* Per NIST standards

SMT Top View LED
UltraViolet


Part No.: **M12001**

Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.01.2011
APPD:	Ping			FINISH	Hui	Sheet	2 from 8



Directive Characteristics

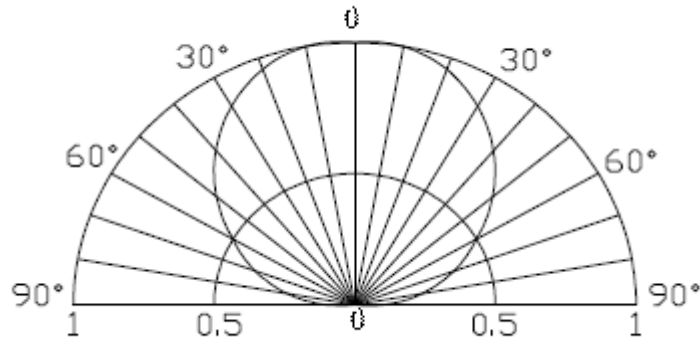


**SMT Top View LED
UltraViolett**

Part No.: **M12001**


Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.01.2011
APPD:	Ping			FINISH	Hui	Sheet	3 from 8



Solder Condition

Lead Free Solder

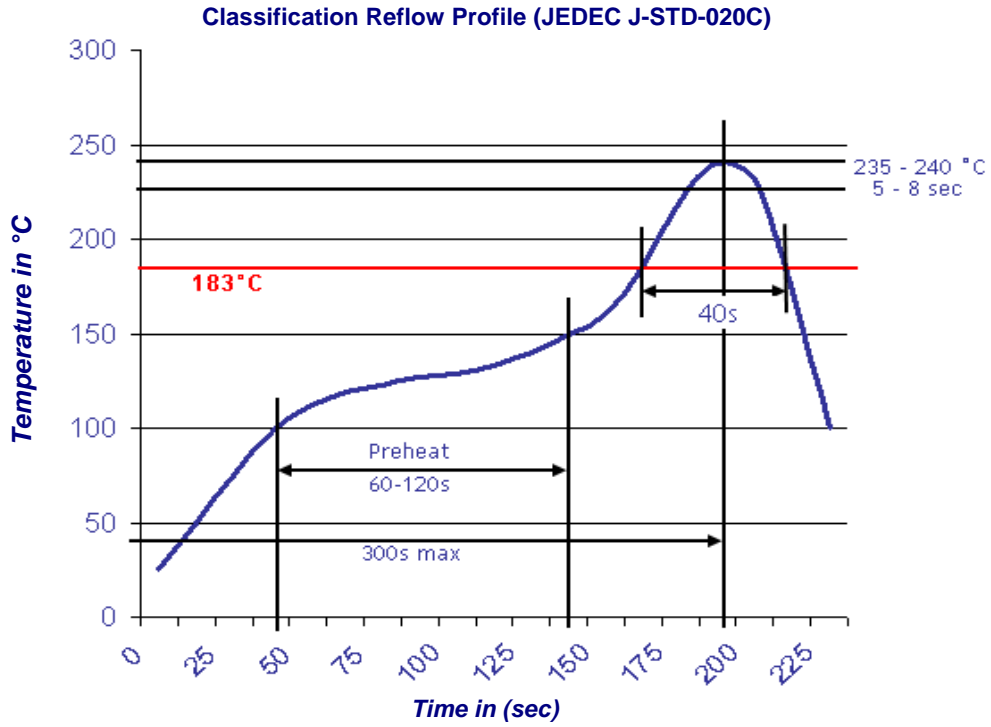


SMT Top View LED UltraViolet	
Part No.:	M12001
Customer:	


DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.01.2011
APPD:	Ping			FINISH	Hui	Sheet	4 from 8



Packing Specifications

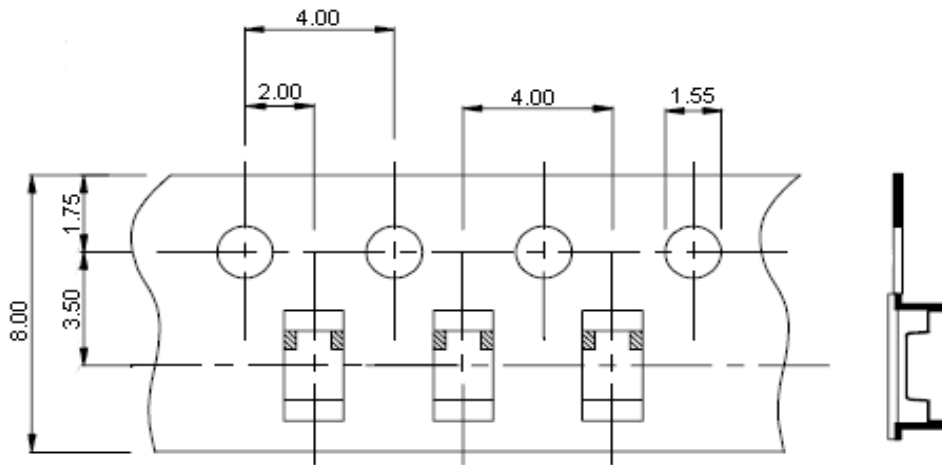

Reel Specifications

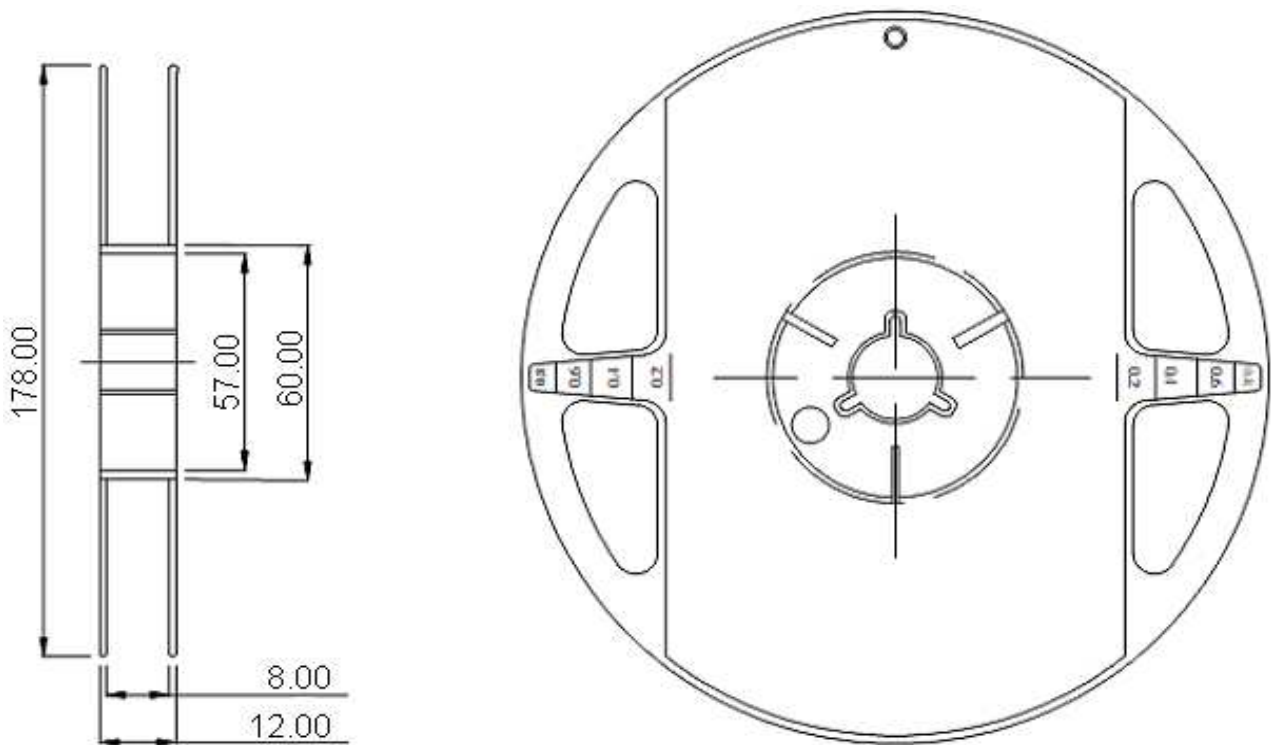


**SMT Top View LED
 UltraViolet**

Part No.: **M12001**

Customer:


DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.01.2011
APPD:	Ping			FINISH	Hui	Sheet	5 from 8




Handling Precautions

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools

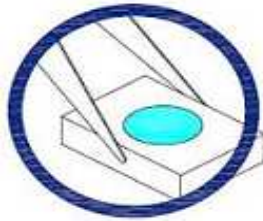

2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.

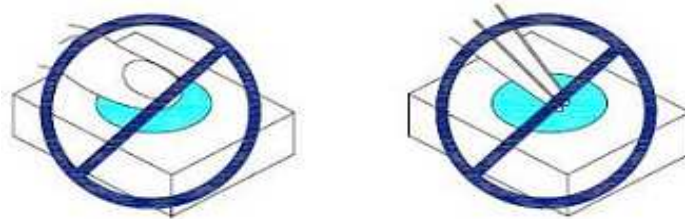

3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.




SMT Top View LED UltraViolet


Part No.: **M12001**

Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.01.2011
APPD:	Ping			FINISH	Hui	Sheet	6 from 8



4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.

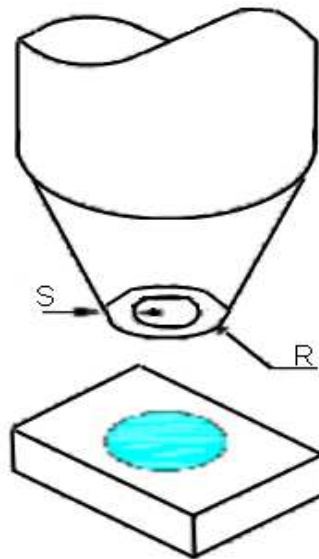


**SMT Top View LED
UltraViolet**


Part No.: **M12001**

Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.01.2011
APPD:	Ping			FINISH	Hui	Sheet	7 from 8



Color table curve

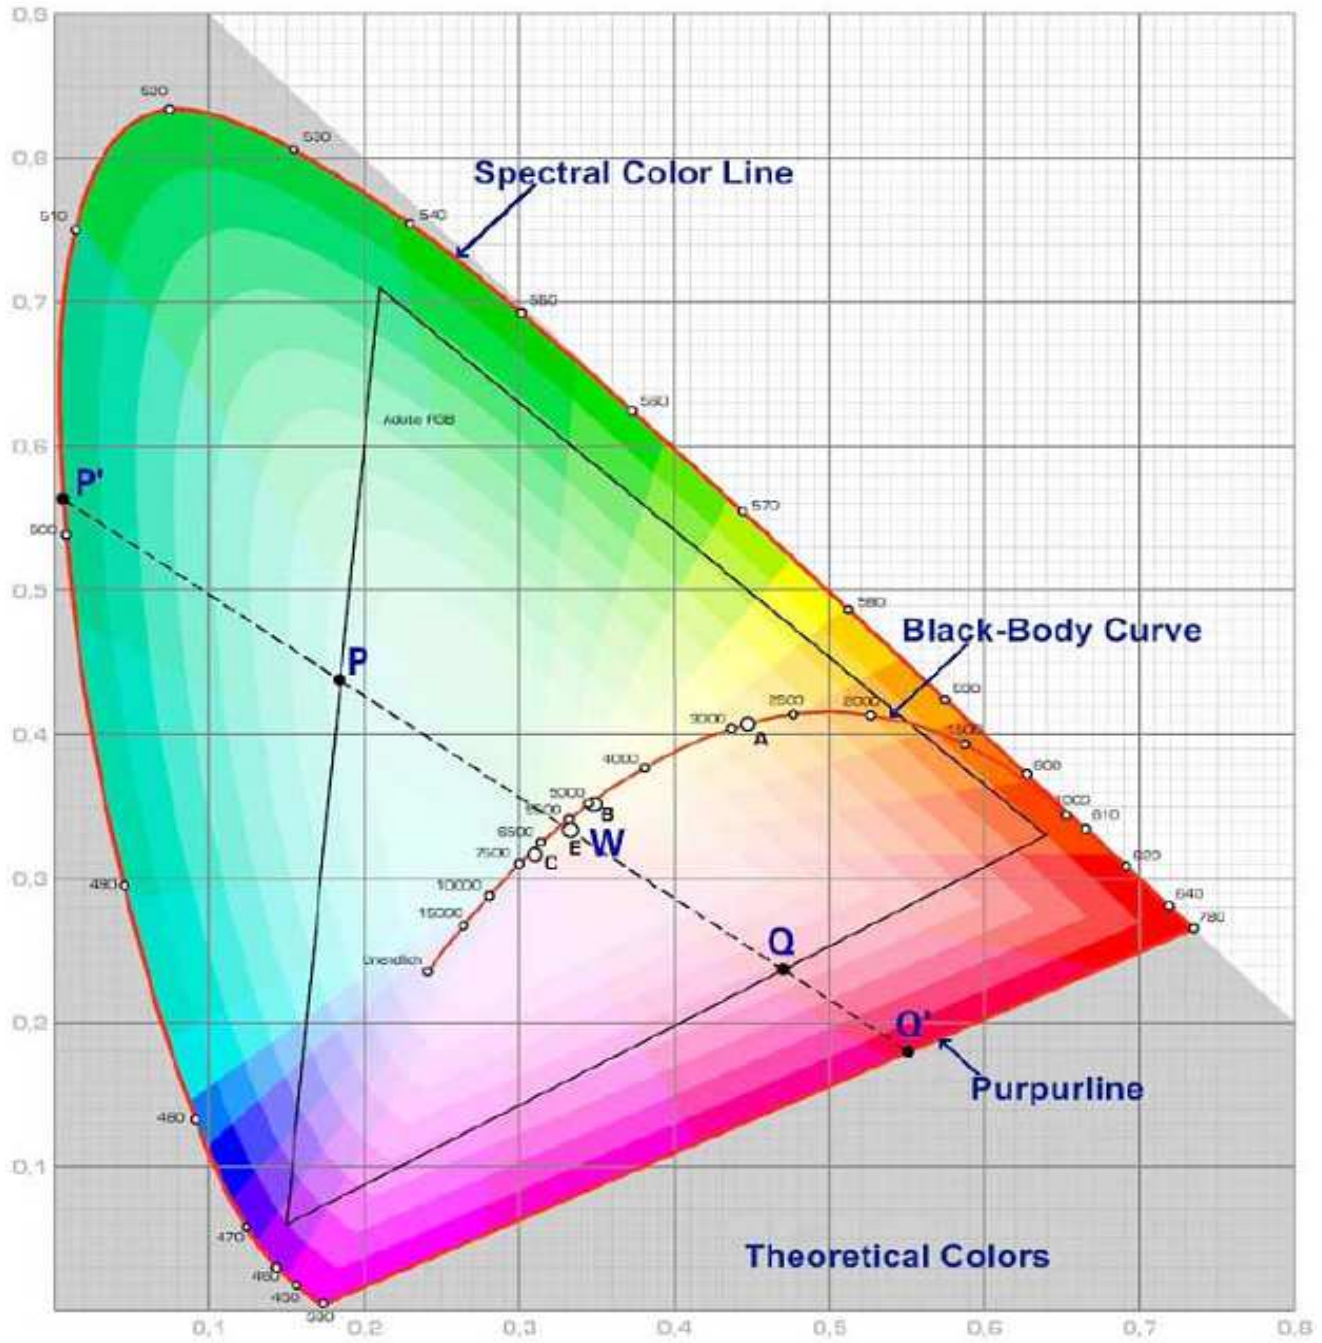

SMT Top View LED UltraViolett	
Part No.:	M12001
Customer:	

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.01.2011
APPD:	Ping			FINISH	Hui	Sheet	8 from 8

Copyright by EDCON-COMPONENTS