

EDCON-COMPONENTS




Specifications

Min. Sound Pressure Level at 3Vdc /10cm	75dB
Rated Voltage	3Volt DC
Operating Voltage	2~5Volt DC
Max. Consumption at 2,7KHz/7,2Vp.p. Square Wave	30mA/3Vdc
Resonant Frequency	2,40KHz +/-400Hz
Operating Temperature	. -20 ~ +70°C
Storage Temperature	. -30 ~ +80°C
Case Material	PPS
Weight:	2,0gr.

This Label is removed after reflow soldering

Test Circuit

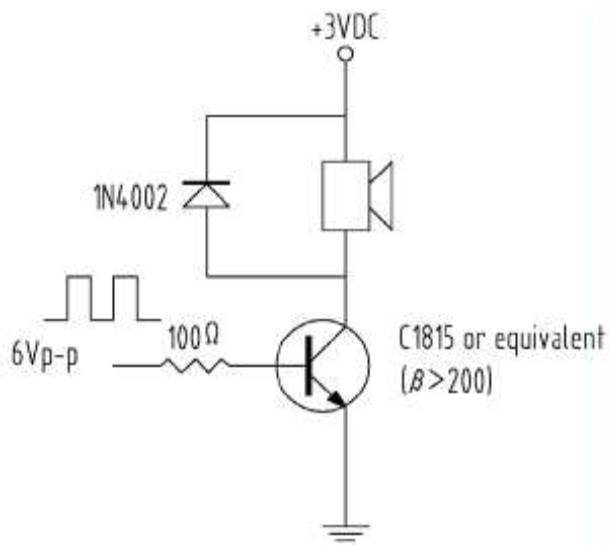


Features

Low Frequency
 Small Size and slim Size
 Can Endure Reflow Solder Process

Applications

Automatic Control Equipment
 Communication Equipment
 Electronic Instruments

PCB Layout



SMD Magnetic Buzzer


Part No.: **Y15008**

DRW:	Jason	CHKD	Wilson	MAIL:	Wilson	TOLERANCE	Mason	DATE	10.06.2010	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4		


EDCON-COMPONENTS



Dimensions (mm)

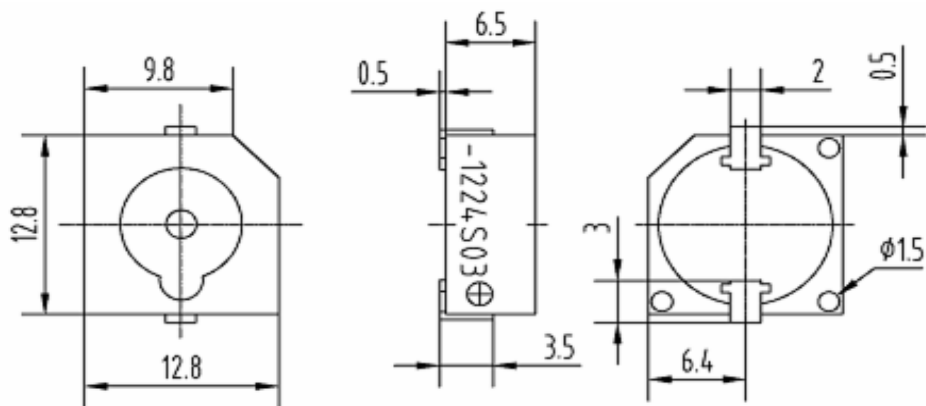

Characteristics

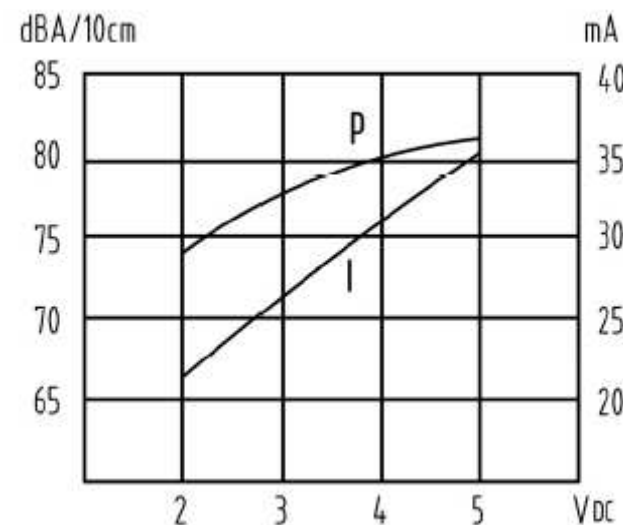

SMD Magnetic Buzzer

Part No.: **Y15008**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.06.2010
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 4

Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Model-No.	ROHS	Package						
Y15008	1224S03	R	TR						

R = ROHS Conform	TR = Tape Reel
N = NON ROHS Conform	TU = Tube Packing

SMD Magnetic Buzzer

Part No.: **Y15008**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.06.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

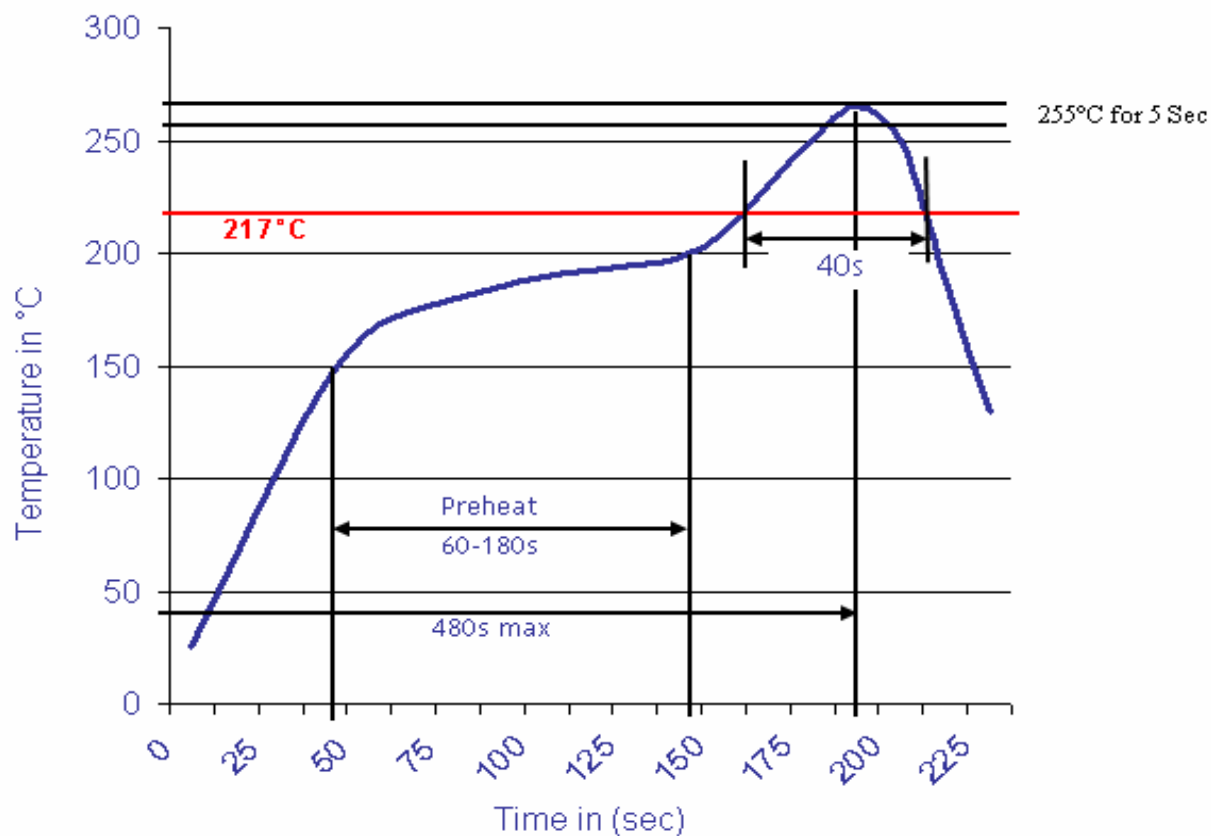

SMD Magnetic Buzzer

Part No.: **Y15008**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.06.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	Customer: