

EDCON-COMPONENTS



Specifications

Min. Sound Pressure Level at 12Vdc /10cm	85dB
Rated Voltage	1.5Volt DC
Operating Voltage	1~2Volt DC
Max. Consumption at 2,7KHz/7,2Vp.p. Square Wave	80mA
Resonant Frequency	2730KHz +/-100Hz
Coil Resistance:	6 +/- 1Ω)
Coil Impedance:	16 Ω)
Operating Temperature	. -20 ~ +70°C
Storage Temperature	. -30 ~ +80°C
Housing Material	PPS
Weight:	0,6gr.

This Label is removed after reflow soldering

Features

This Item is designed for surface mounting Applications
 The Pin is plated with tin which can meet request of reflow
 Soldering Process at 260°C for 30 seconds

Applications

Miniature Electronic Devices
 Communication Equipment

SMD Magnetic Buzzer

Part No.: **Y15015**

Customer:




DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.03.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



Dimensions (mm)

Frequency

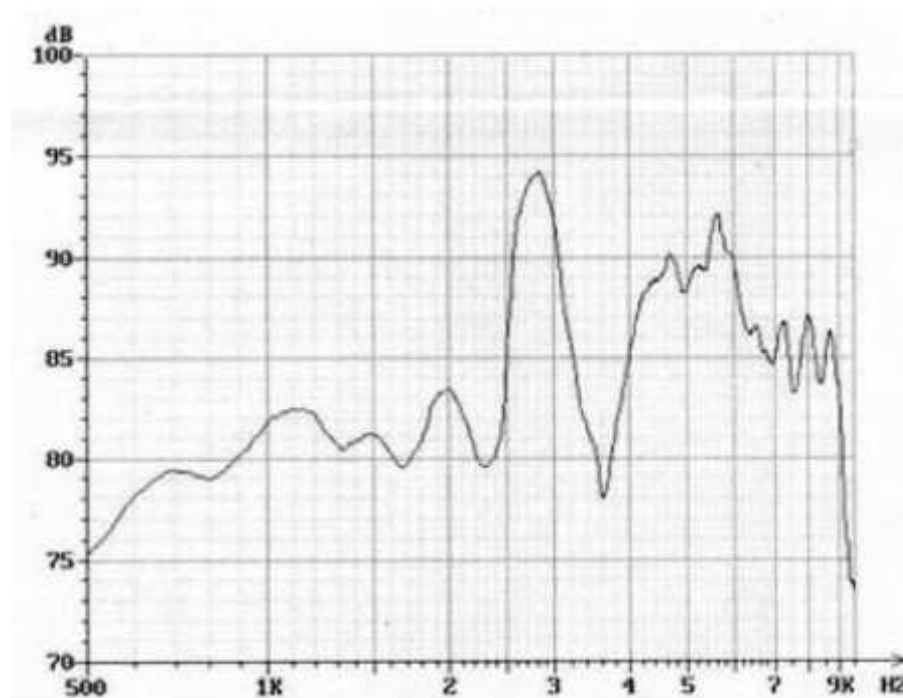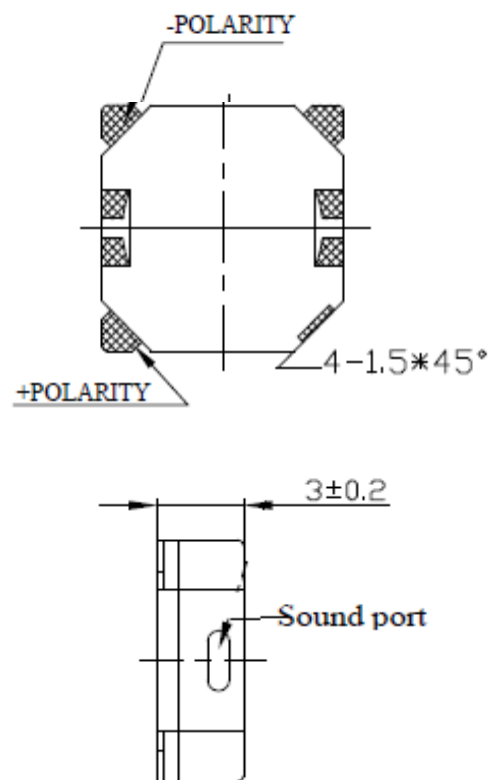

SMD Magnetic Buzzer

Part No.: **Y15015**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.03.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	

Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Model-No.	ROHS	Package						
Y15015	08A03	R	TR						

R = ROHS Conform	TR = Tape Reel
N = NON ROHS Conform	TU = Tube Packing
	TY = Tray Packing

SMD Magnetic Buzzer

Part No.: **Y15015**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.03.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

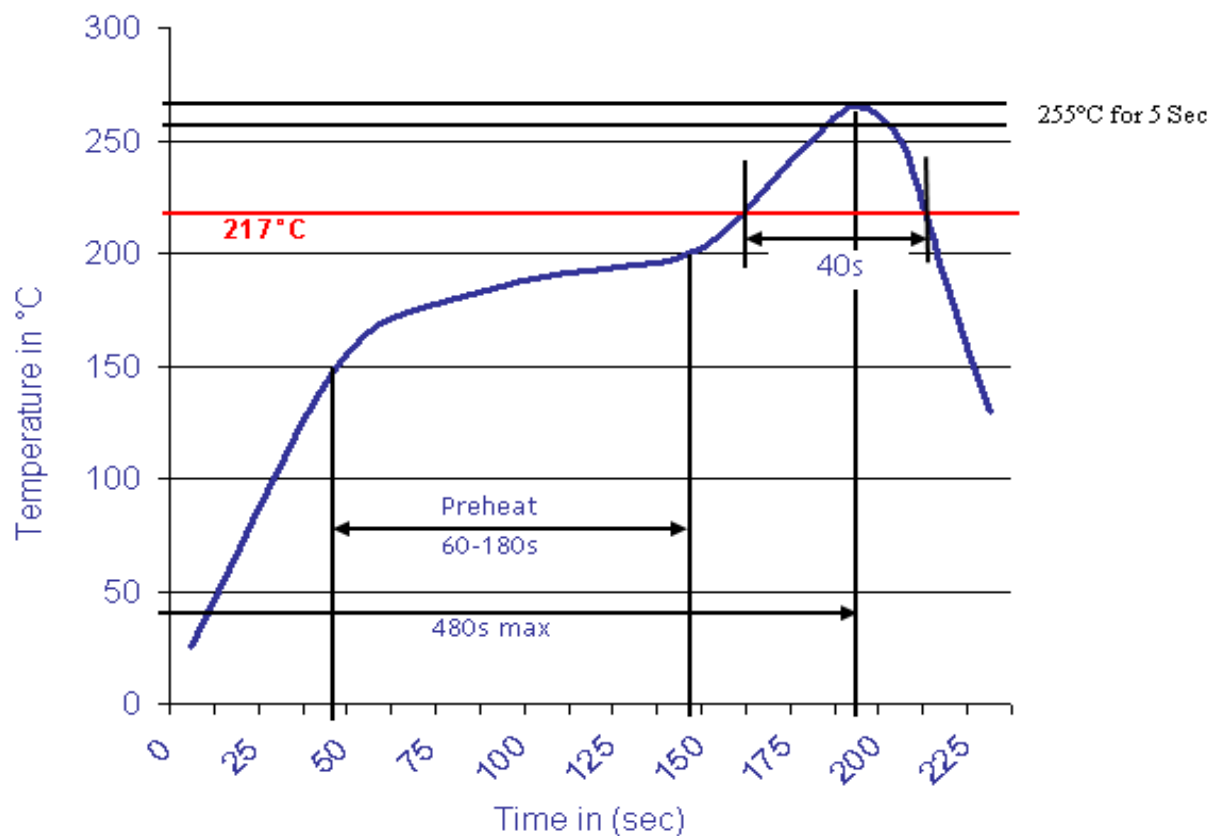

SMD Magnetic Buzzer

Part No.: **Y15015**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.03.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

Customer: