





Applications

- Interior automotive lighting
- Optical indicators
- Communication Products
- Backlighting
- Toys

Technical Drawing

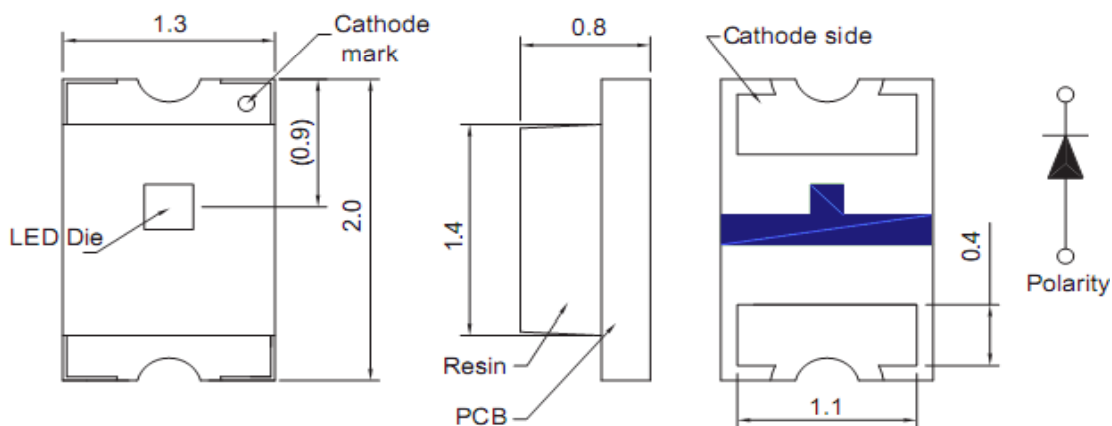

Recommended Soldering Pattern

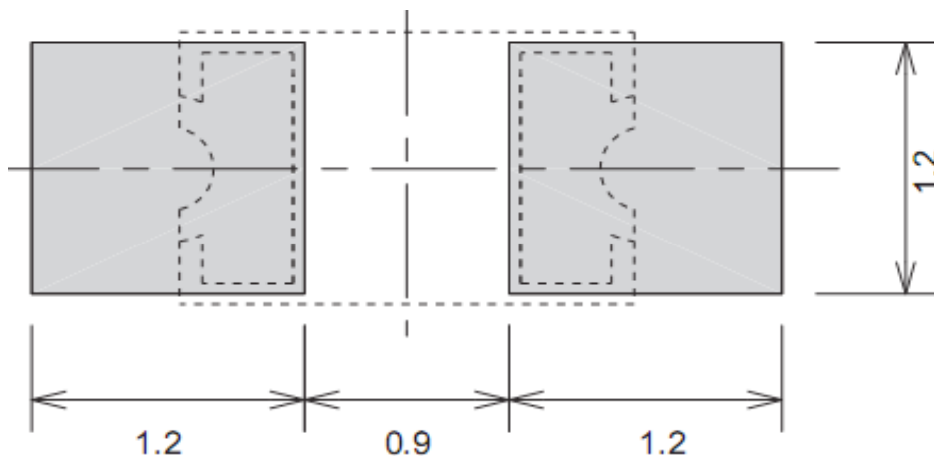

Notes :

All dimensions in mm tolerance is ± 0.1 mm unless otherwise noted.

SMT Top View LED Warm White	
Part No.:	M11B6016
Customer:	

DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	28.01.2020
APPD:	Ping			FINISH	Dia	Sheet	1 from 9



Absolute Maximum Ratings

Ta=25°C

Item	Symbol	InGaN	Unit
Power Dissipation	P _D	78	mW
DC Forward Current	I _F	20	mA
Pulsed Forward Current	I _{FP} *	80	mA
Reverse Voltage	V _R	5	V
Operating Temperature	T _{OP}	-30 to 80	°C
Storage Temperature	T _{ST}	-40 to 85	°C

* 0.1 msec pulse, 10% duty cycle

Electrical / Optical Characteristics

I_F=5mA Ta=25°C

Ermitting Color	Warm White		
Material	InGaN		
Forward Voltage	typ.	3,3	V _F
	max.	3,6	V _F
Wavelength typ.	λD	x = 0.44 y = 0.41	nm
	λP	---	nm
	Δλ	---	nm
Color Temperature	min.	---	K
	max.	---	K
Luminous Intensity *	min.	350	mcd
	typ.	450	mcd
Reverse Current	max.	---	μA
Viewing Angle	2θ1/2	120	

* Per NIST standards

SMT Top View LED
Warm White



Part No.: **M11B6016**

Customer:

DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	28.01.2020
APPD:	Ping			FINISH	Dia	Sheet	2 from 9



Directive Characteristics






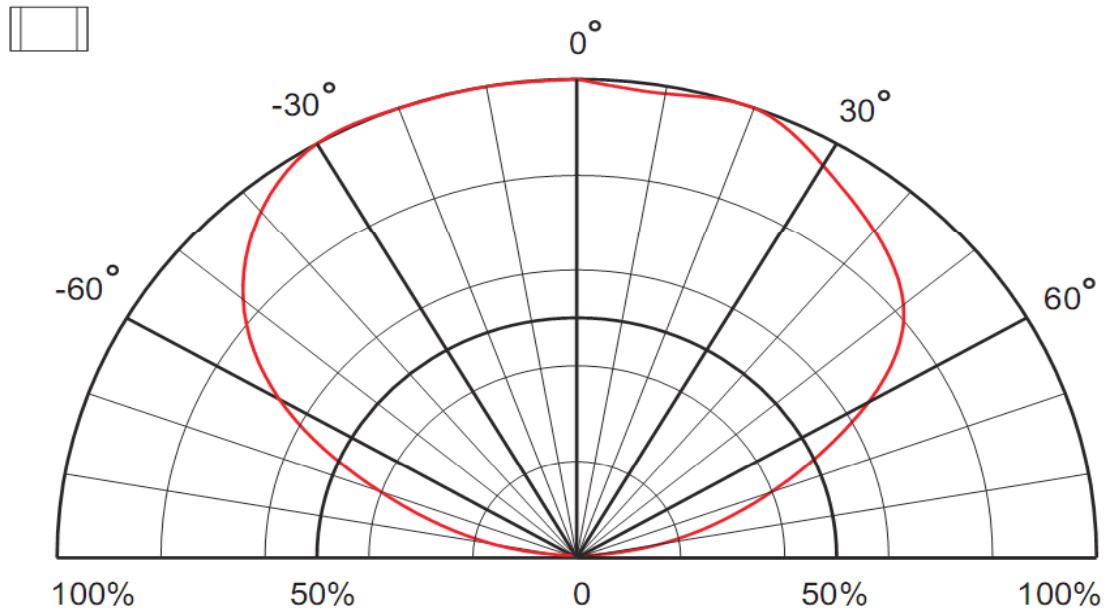
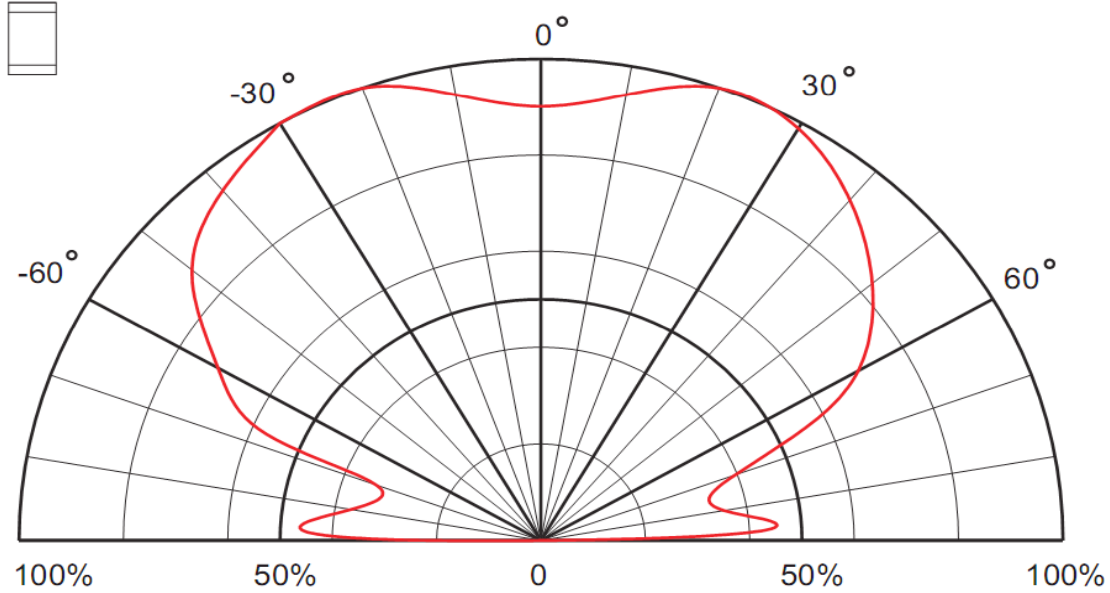


SMT Top View LED	
Warm White	
Part No.:	M11B6016
Customer:	

DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	28.01.2020
APPD:	Ping			FINISH	Dia	Sheet	3 from 9



Curvs

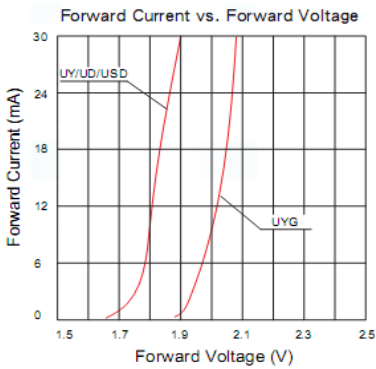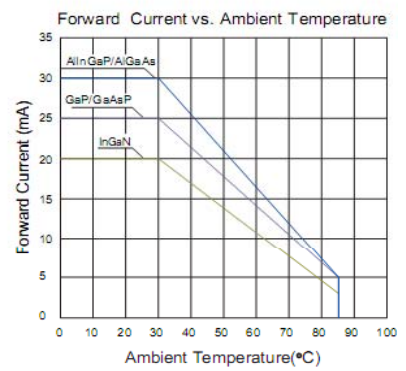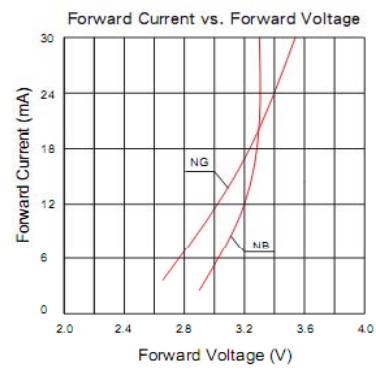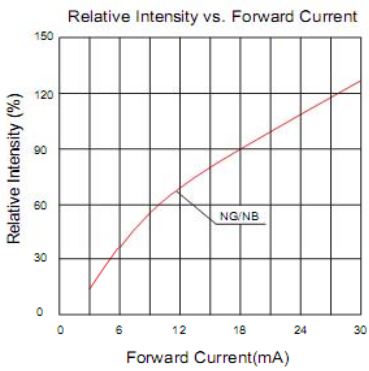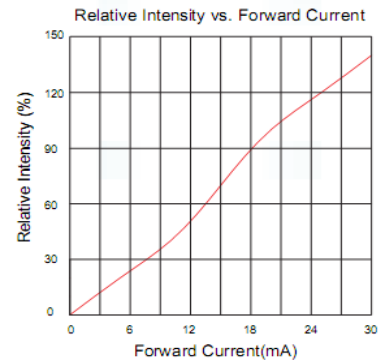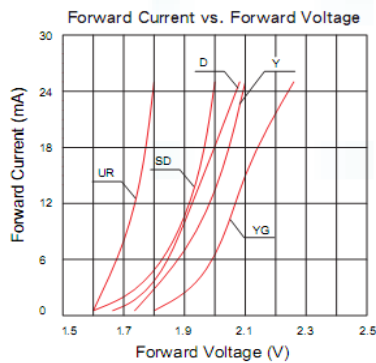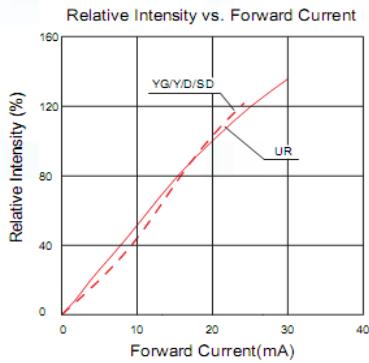

SMT Top View LED Warm White	
Part No.:	M11B6016
Customer:	


DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	28.01.2020
APPD:	Ping			FINISH	Dia	Sheet	4 from 9



Solder Condition

Lead Free Solder

Classification Reflow Profile (JEDEC J-STD-020C)

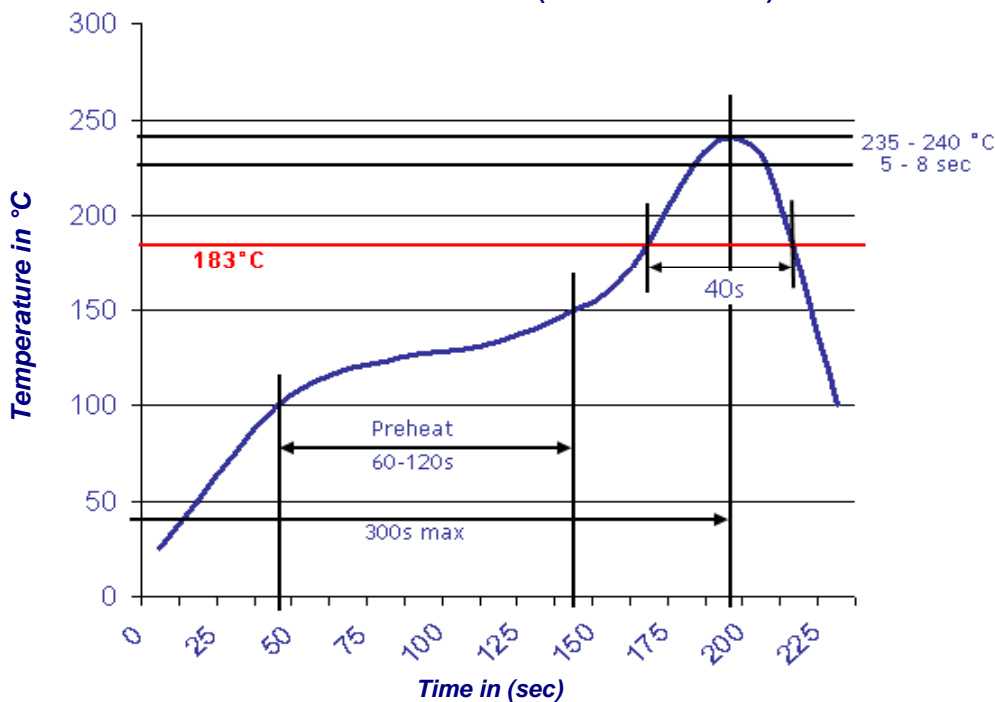


SMT Top View LED Warm White	
Part No.:	M11B6016
Customer:	


DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	28.01.2020
APPD:	Ping			FINISH	Dia	Sheet	5 from 9



Packing Specifications

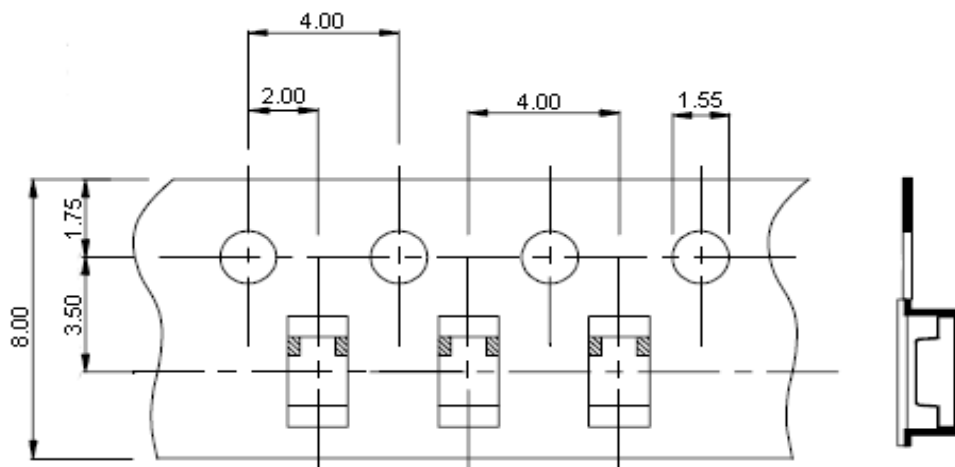

Reel Specifications

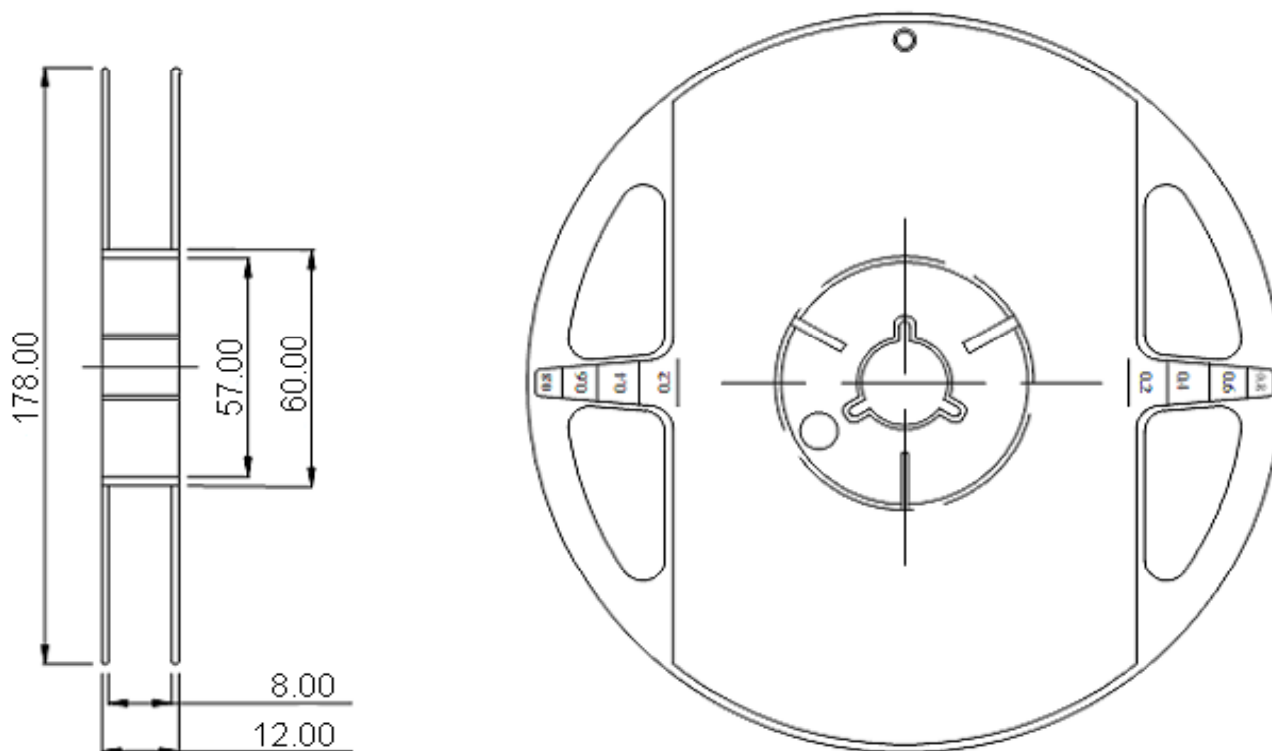

SMT Top View LED Warm White	
Part No.:	M11B6016
Customer:	

DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	28.01.2020
APPD:	Ping			FINISH	Dia	Sheet	6 from 9



Handling Precautions

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools



2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.



3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.




SMT Top View LED Warm White							
Part No.:						M11B6016	
Customer:							
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	28.01.2020
APPD:	Ping			FINISH	Dia	Sheet	7 from 9

DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	28.01.2020
APPD:	Ping			FINISH	Dia	Sheet	7 from 9



4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.

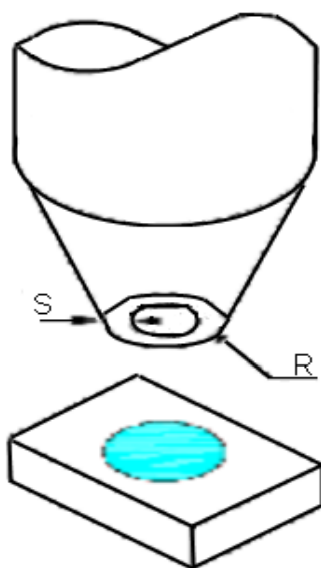


SMT Top View LED Warm White	
Part No.:	M11B6016
Customer:	

DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	28.01.2020
APPD:	Ping			FINISH	Dia	Sheet	8 from 9



Color table curve

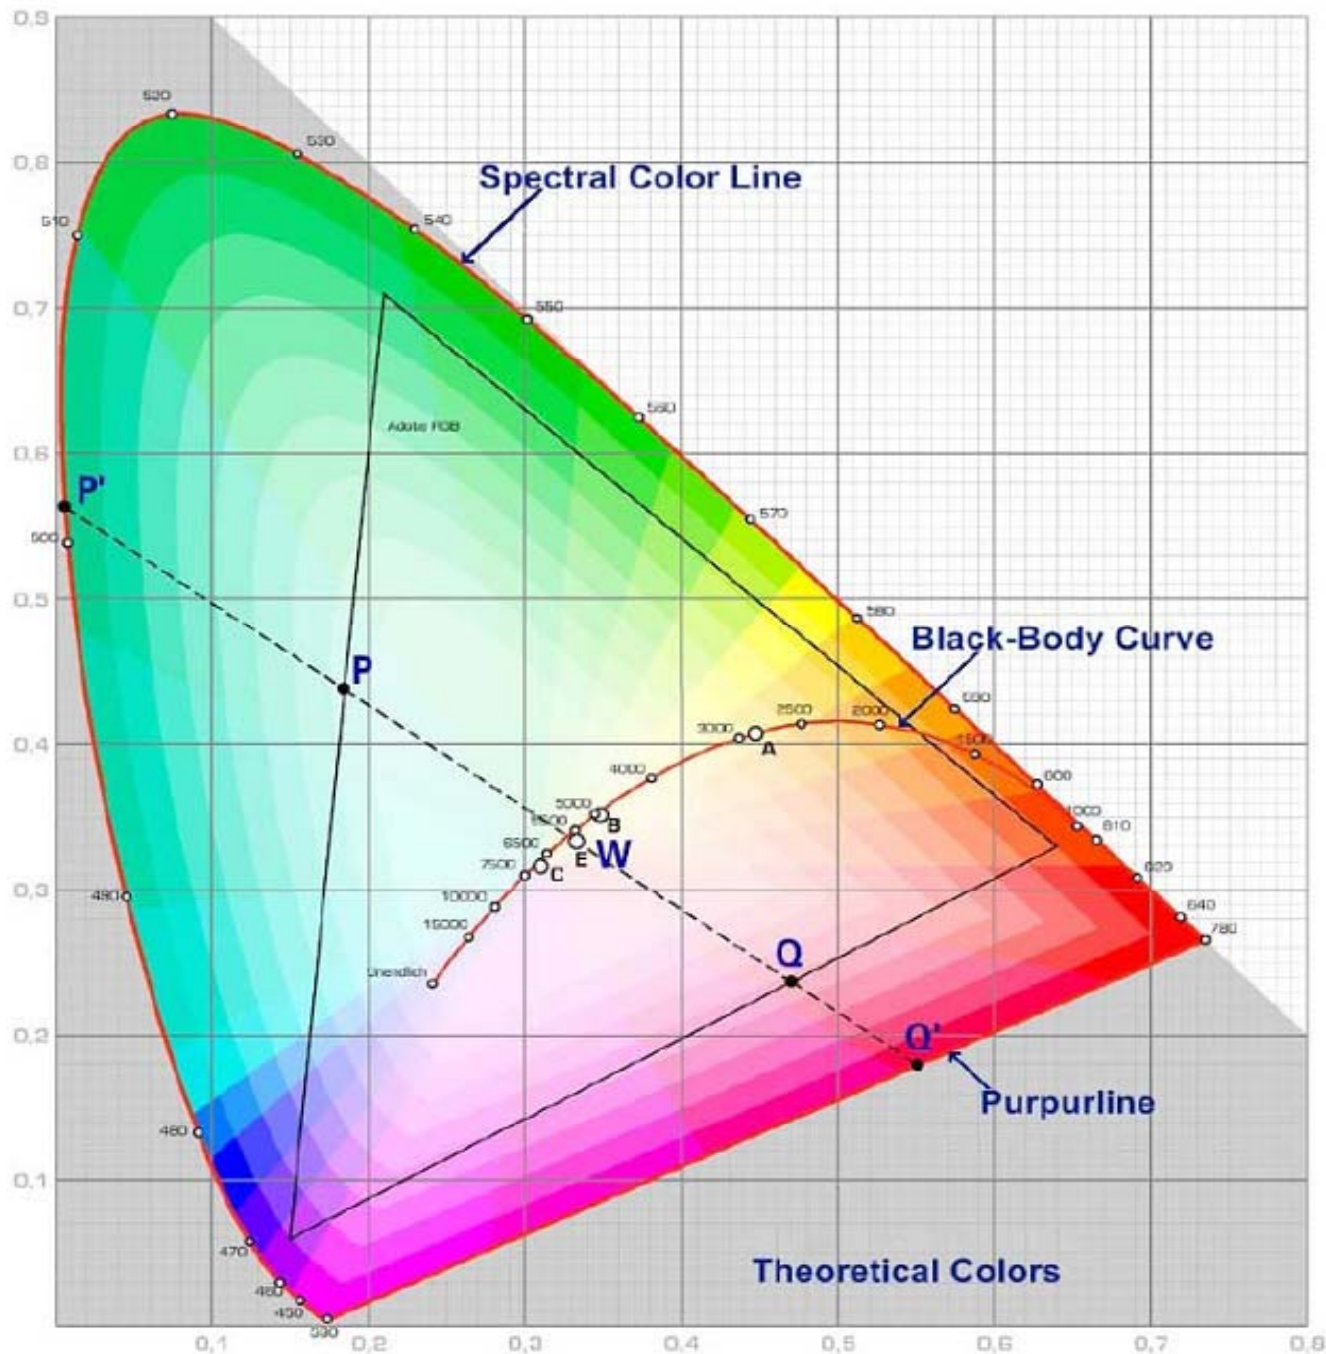

SMT Top View LED	
Warm White	
Part No.:	M11B6016
Customer:	

DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	28.01.2020
APPD:	Ping			FINISH	Dia	Sheet	9 from 9