





#### Applications


Interior automotive lighting

 Optical indicators
 Communication Products
 Backlighting
 Toys

#### **Technical Drawing**

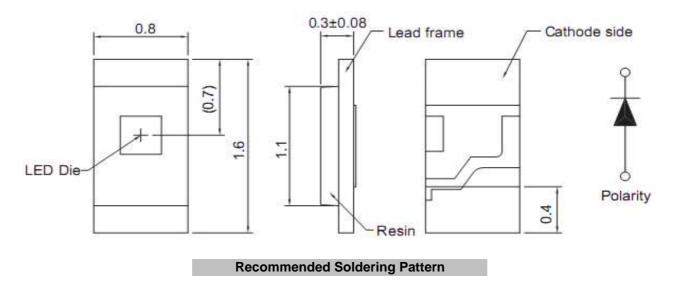



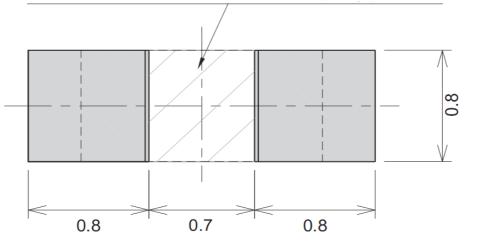

	: All dimensions ± 0.1mm unle		SMT Top View LED Yellow Green				
			Part No.	.: M11	E1001		
					Customer:		
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009
APPD:	Ping			FINISH	Dia	Sheet	1 from 9

#### www.edcon-components.com

Copyright by EDCON-COMPONENTS





### **Absolute Maximum Ratings**

Ta=25°C

Item	Symbol	AllnGaP	Unit
Power Dissipation	PD	72	mW
DC Forward Current	I <sub>F</sub>	30	mA
Plused Forward Current	I <sub>FP</sub> *	I <sub>FP</sub> * 100	
Reverse Voltage	V <sub>R</sub>	5	V
Operating Temperature	T <sub>OP</sub>	-30 to 80	°C
Storage Temperature	T <sub>ST</sub>	-40 to 85	°C

\* 0.1 msec pulse, 10% duty cycle

Electrcal / Optical Characteristics

I<sub>F</sub>=5mA Ta=25°C

Ermitting Color	Yellow Green					
Material		AllnGaP				
Forward Voltage	typ.	1.8	V <sub>F</sub>			
r orward voltage	max.	2.0	V <sub>F</sub>			
Wavelength	λD	573	nm			
•	λP	574	nm			
typ.	Δλ	20	nm			
Color Temperature	min.		K			
	max.		K			
Luminous Intensity *	min.	18	mcd			
Lummous intensity	typ.	28	mcd			
Reverse Current	max.		μA			
Viewing Angle	2Θ1/2	x = 140 y = 120				


\* Per NIST standards


## SMT Top View LED Yellow Green

					Part No.: <b>M11E1001</b>		E1001		
					Custome	er:			
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009		
APPD:	Ping			FINISH	Dia	Sheet	2 from 9		
	Copyright by EDCON-COMPONENTS								





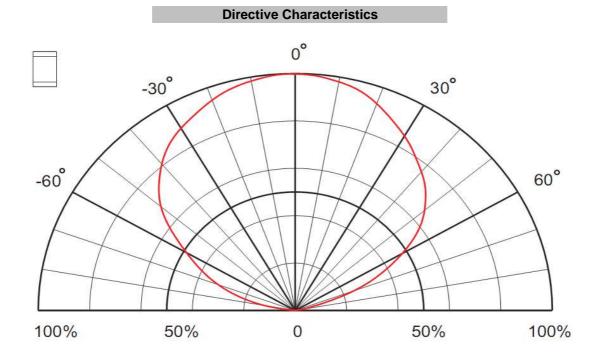

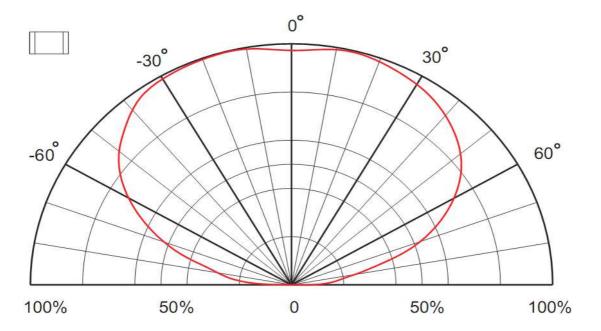


				SM	IT Top View Yellow Greer				
					Part No.: <b>M11E1001</b>				
Customer:									
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009		
APPD:	Ping			FINISH	Dia	Sheet	3 from 9		
	Copyright by EDCON-COMPONENTS								


www.edcon-components.com





Curvs

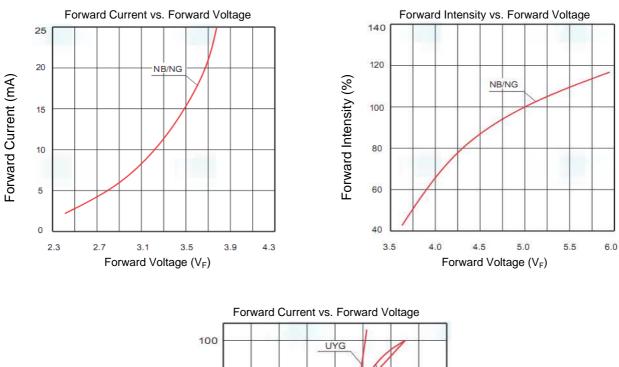

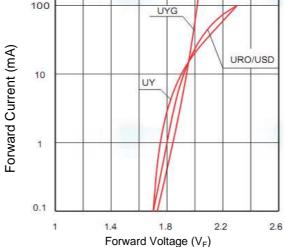

				SM	T Top View Yellow Green				
	Part No.: <b>M11E1001</b>					1E1001			
		Customer:							
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009		
APPD:	Ping			FINISH	Dia	Sheet	4 from 9		
	Copyright by EDCON-COMPONENTS								

www.edcon-components.com


y EDCON-COMPONENTS





#### **Solder Condition**

#### Lead Free Solder

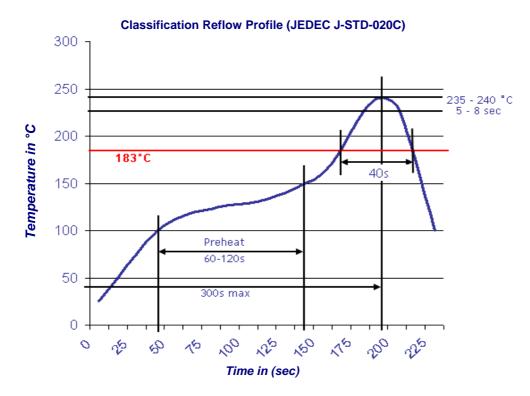


# SMT Top View LED Yellow Green


					Part No.	.: M11	E1001	
					Custome	er:		
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009	
APPD:	Ping			FINISH	Dia	Sheet	5 from 9	
	Copyright by EDCON-COMPONENTS							






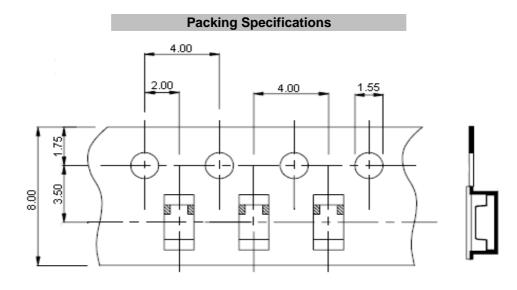

**Reel Specifications** 

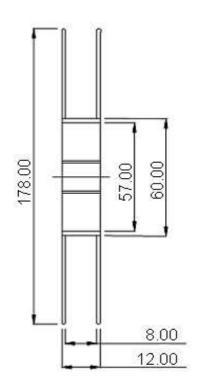

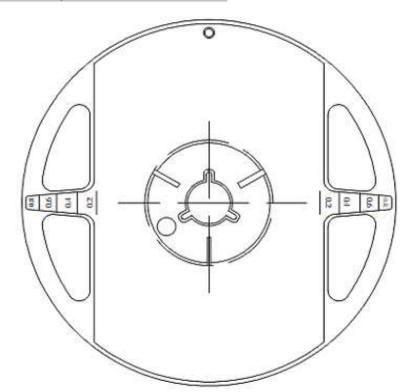

				SN	<b>IT Top View L</b> Yellow Green	.ED			
					Part No.: <b>M11E1001</b>				
Customer:									
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009		
APPD:	Ping			FINISH	Dia	Sheet	6 from 9		
	Copyright by EDCON-COMPONENTS								







#### Handling Precautions

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although ist characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might leads to damage and premature failure of th LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools



2. Do not directly touch or handle the silicone lens surfance. It may damage the internal circuitry.

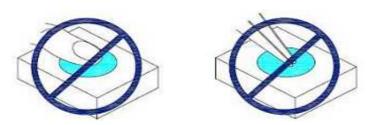

3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.




# SMT Top View LED Yellow Green

					Part No.	: <b>M11</b>	E1001
					Custome	er:	
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009
APPD:	Ping			FINISH	Dia	Sheet	7 from 9
Copyright by EDCON-COMPONENTS							





- 4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
- 5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
- 6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.

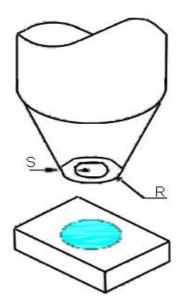


## SMT Top View LED Yellow Green

					Part No.	.: M11	E1001		
					Custome	er:			
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009		
APPD:	Ping			FINISH	Dia	Sheet	8 from 9		
	Copyright by EDCON-COMPONENTS								





Color table curve

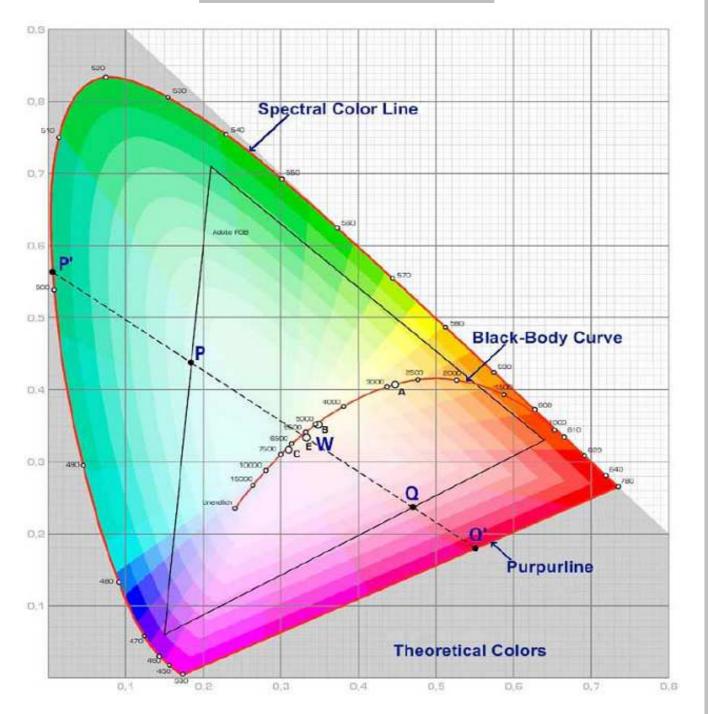

					SMT Top View LED Yellow Green		
					Part No.: <b>M11E1001</b>		
					Customer:		
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009
APPD:	Ping			FINISH	Dia Sheet 9 from 9		

www.edcon-components.com

Copyright by EDCON-COMPONENTS