




#### Applications

Interior automotive lighting

 Optical indicators
 Communication Products
 Backlighting
 Toys

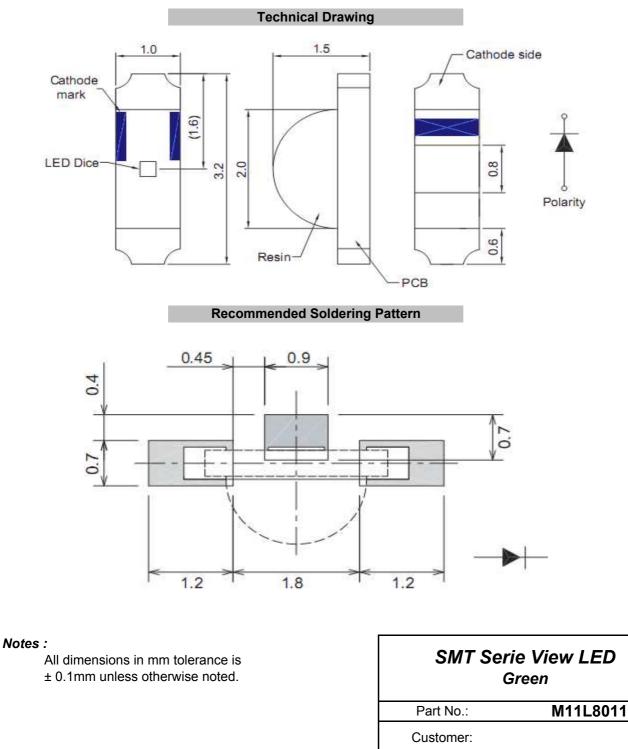

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	04.12.2009
APPD:	Ping			FINISH	Hui	Sheet	1 from 9

Copyright by EDCON-COMPONENTS





# **Absolute Maximum Ratings**

Ta=25°C

Item	Symbol	InGaN	Unit
Power Dissipation	PD	78	mW
DC Forward Current	I <sub>F</sub>	20	mA
Plused Forward Current	I <sub>FP</sub> *	80	mA
Reverse Voltage	V <sub>R</sub>	5	V
Operating Temperature	T <sub>OP</sub>	-30 to 80	°C
Storage Temperature	T <sub>ST</sub>	-40 to 85	°C

\* 0.1 msec pulse, 10% duty cycle

Electrcal / Optical Characteristics

I<sub>F</sub>=20mA Ta=25°C

Ermitting Color		Green				
Material	InGaN					
Forward Voltage	typ.	3.3	V <sub>F</sub>			
Forward voltage	max.	3.9	V <sub>F</sub>			
Wavelength	λD	527	nm			
-	λP	λΡ 520				
typ.	Δλ	40	nm			
Color Temperature	min.		K			
Color remperature	max.		K			
Luminous Intensity *	min.	140	mcd			
Lumnous intensity	typ.	226	mcd			
Reverse Current	max.		μA			
Viewing Angle	201/2	x = 140 y = 120				

\* Per NIST standards


					SMT Serie View LED Green					
					Part No.: <b>M11L8011</b>		L8011			
					Custome	er:				
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	04.12.2009			
APPD:	Ping			FINISH	Hui	Sheet	2 from 9			
	Copyright by EDCON-COMPONENTS									


INT BY EDCON-COMPONENTS





**Directive Characteristics** 

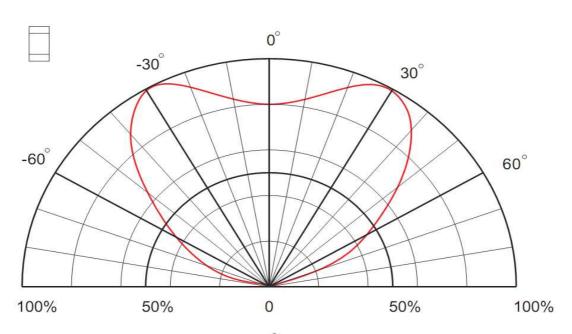

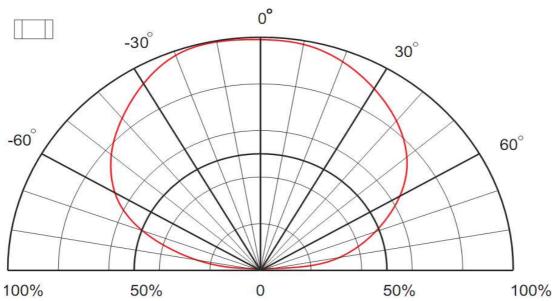

					SMT Serie View LED Green		
					Part No.: <b>M11L8011</b>		_8011
					Custome	er:	
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	04.12.2009
APPD:	Ping			FINISH	Hui	Sheet	3 from 9


www.edcon-components.com


Copyright by EDCON-COMPONENTS








Curvs

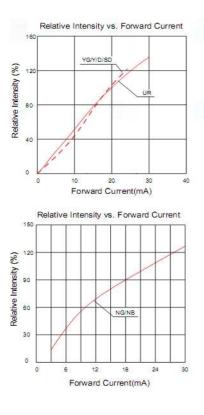


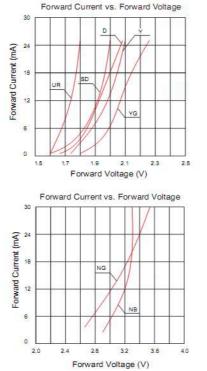









		SMT Serie View LED Green						
		Part No.: <b>M11L8011</b>						
		Custome	er:					
Chang	MATL:	Chui	DATE	04.12.2009				
	FINISH	Hui Sheet 4 from						
Copyright by EDCON-COMPONENTS								

www.edcon-components.com

Dong

Ping

CHKD

DRW:


APPD:





#### **Solder Condition**

## Lead Free Solder

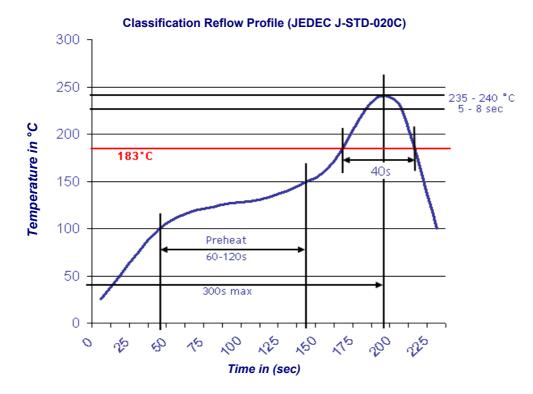

		SMT Serie View LED Green				
		Part No.: <b>M11L8011</b>				
		Custome	r:			
Chang	MATL:	Chui	DATE	04.12.2009		
	FINISH	Hui	Sheet	5 from 9		

Dong

Ping

CHKD


DRW:

APPD:


Copyright by EDCON-COMPONENTS






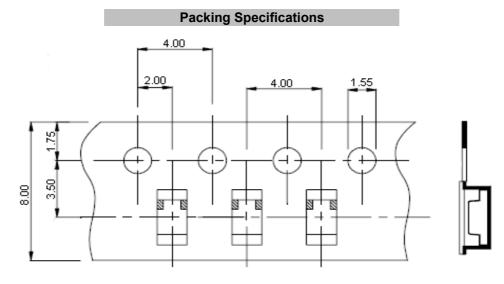

**Reel Specifications** 

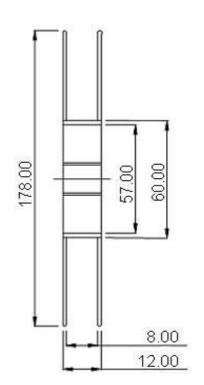

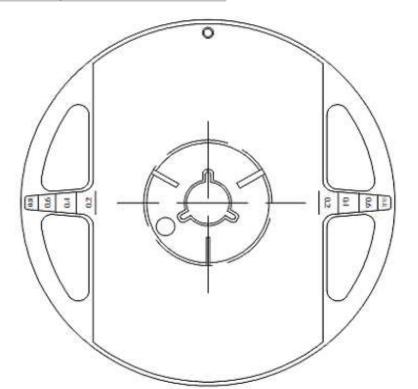

					SMT Serie View LED Green		
					Part No.: <b>M11L8011</b>		_8011
					Custome	er:	
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	04.12.2009
APPD:	Ping			FINISH	Hui	Sheet	6 from 9

www.edcon-components.com

Copyright by EDCON-COMPONENTS







### Handling Precautions

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although ist characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might leads to damage and premature failure of th LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools



2. Do not directly touch or handle the silicone lens surfance. It may damage the internal circuitry.

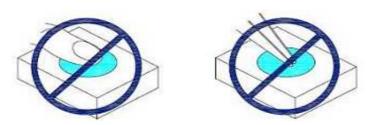

3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.



					SMT Serie View LED Green		
					Part No.: <b>M11L8011</b>		_8011
					Custome	er:	
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	04.12.2009
APPD:	Ping			FINISH	Hui	Sheet	7 from 9


www.edcon-components.com

Copyright by EDCON-COMPONENTS





- 4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
- 5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
- 6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.

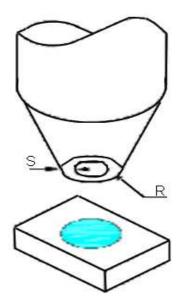

	SMT Serie View LED Green						
	Part No	.: M11L	.8011				
	Custome	er:					
MATL:	Chui	DATE	04.12.2009				
FINISH	Hui	Sheet	8 from 9				

Dong

Ping


CHKD

DRW:

APPD:

Copyright by EDCON-COMPONENTS

Chang

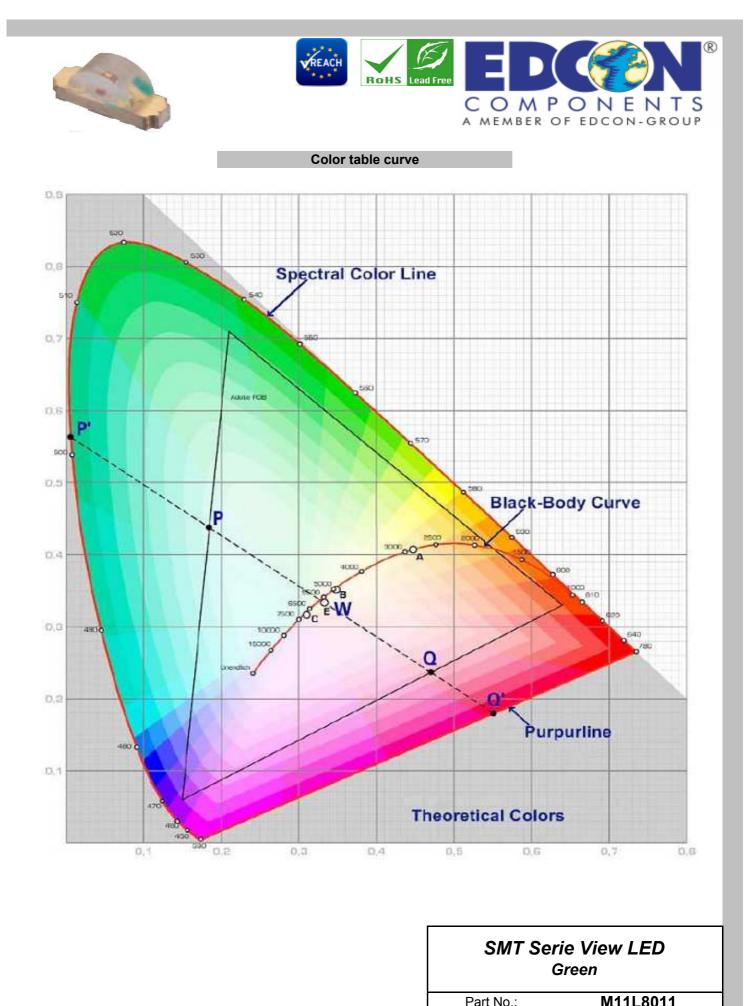

						i altito:		
						Custome	r:	
	DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	04.12.2009
	APPD:	Ping			FINISH	Hui	Sheet	9 from 9
Copyright by EDCON-COMPONENTS								