

EDCON-COMPONENTS




Technical Discription

Temperature Range: ABS= -40°C ~ +80°C

Protection Degree IP66

The enclosure is free from corrosion compressive property and insulation be waterproof and dustproof.

Manufactured from ABS and PC, adequate for terminnal interchange. Bitton box, small terminal, relay, sensor and communication box etc.

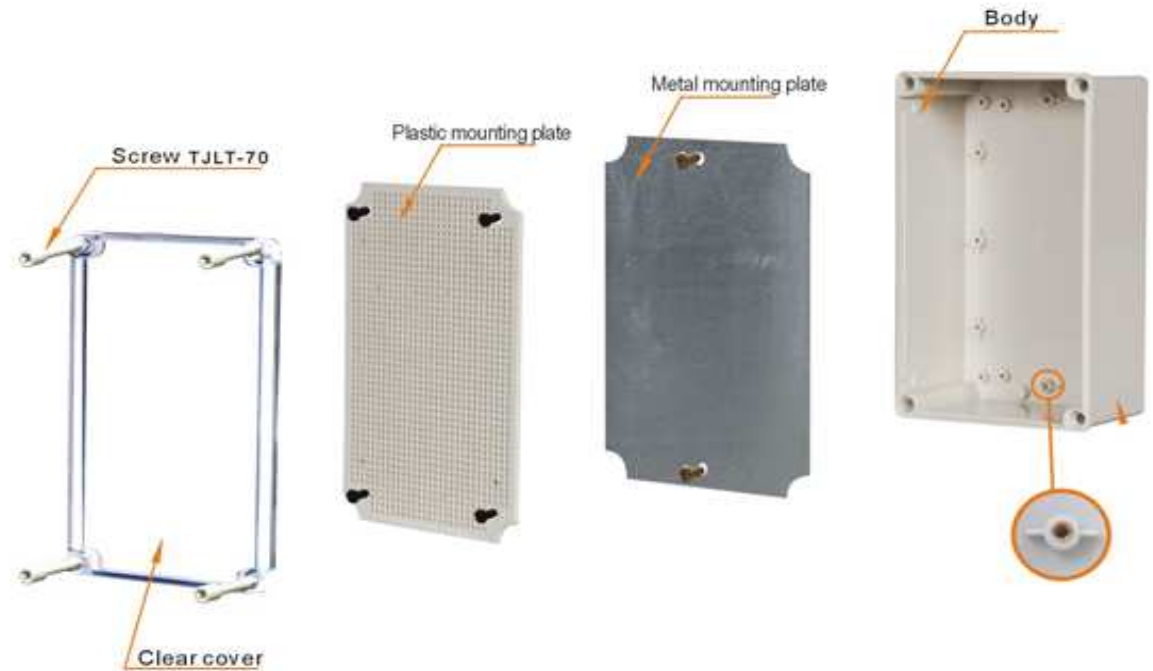

Plastic Mounting plate + Metal mounting plate Please order seperatly

**Sealed Plastic Enclosure
125 x 125 x 100mm**

Part No.: **H45015**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

www.edcon-components.com

Copyright by EDCON-COMPONENTS H.Schmitt

email: info@edcon-components.com


EDCON-COMPONENTS



Technical Drawing

Dimension (mm)												
H1	H2	H3	H4		W1	W2	W3		D1	D2		
125	117	105	70		125	117	105		80	20		

Allowable error $\pm 1\text{mm}$

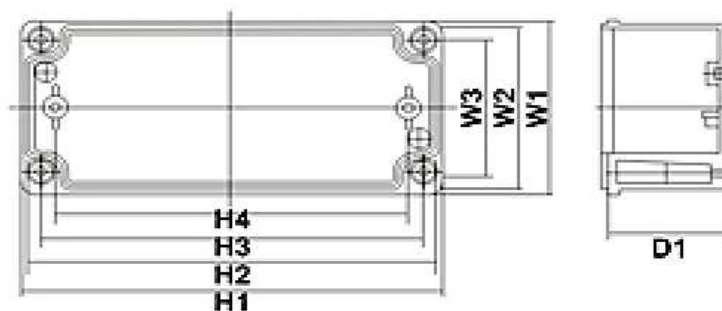

Body



D2

**Sealed Plastic Enclosure
125 x 125 x 100mm**

Part No.: **H45015**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2010	Customer:
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 4	

EDCON-COMPONENTS



Ordering Informations

Serie	Material Base	Color Base	Material Cover	Color Cover	ROHS	Packing				
-------	---------------	------------	----------------	-------------	------	---------	--	--	--	--

H45015	A	G	A	G	R	S				
---------------	----------	----------	----------	----------	----------	----------	--	--	--	--

A= ABS	G= Gray	A= ABS	G= Gray	R= ROHS Conform	S= Standard Packing
		P= Polycar - bonat	T= Transparent	N= NON ROHS Conform	I= Individual Packing

**Sealed Plastic Enclosure
125 x 125 x 100mm**

Part No.: **H45015**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

Customer:

www.edcon-components.com

email: info@edcon-components.com