

EDCON-COMPONENTS



Technical Discription

Temperature Range: ABS= -40°C ~ +80°C

Protection Degree IP66

The enclosure is free from corrosion compressive property and insulation be waterproof and dustproof.

Manufactured from ABS and PC, adequate for terminnal interchange. Bitton box, small terminal, relay, sensor and communication box etc.



**Sealed Plastic Enclosure
175 x 250 x 75mm**

Part No.: **H47026**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

Customer:
email: info@edcon-components.com

www.edcon-components.com


EDCON-COMPONENTS



Technical Drawing

Dimension (mm)												
H1	H2	H3	H4		W1	W2	W3		D1	D2		
250	245	232	211		175	170	157		52	25		

Allowable error $\pm 1\text{mm}$

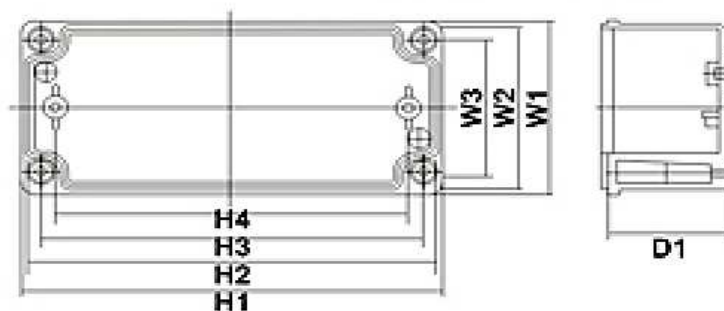

Body



**Sealed Plastic Enclosure
175 x 250 x 75mm**

Part No.: **H47026**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2010	Customer:
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 3	

www.edcon-components.com

email: info@edcon-components.com

Copyright by EDCON-COMPONENTS

EDCON-COMPONENTS



Ordering Informations

Serie	Material Base	Color Base	Material Cover	Color Cover	ROHS	Packing				
-------	---------------	------------	----------------	-------------	------	---------	--	--	--	--

H47026	A	G	A	G	R	S				
---------------	----------	----------	----------	----------	----------	----------	--	--	--	--

A= ABS	G= Gray	A= ABS	G= Gray	R= ROHS Conform	S= Standard Packing
		P= Polycar - bonat	T= Transparent	N= NON ROHS Conform	I= Individual Packing

**Sealed Plastic Enclosure
175 x 250 x 75mm**

Part No.: **H47026**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	

Customer:

www.edcon-components.com

email: info@edcon-components.com