




Applications

- Interior automotive lighting(dashboard backlight etc...)
- Optical indicators
- High Tech Lightning
- Security Parts
- Automotive Products

Technical LED inside

| | |
|------------------------------|---------------------|
| Size of LED | 3PCS Duper Flux LED |
| PCS | 3 |
| Waterproof | Yes |
| Case: | Plastic |
| Case Size Dimension: | 78x18mm |
| Operating Current: | 30mA per Module |
| Viewing Angle: | 120° |
| Luminous Flux: | 9 lm |
| Power Dissipation per Meter: | 0,30 Watt |
| Protection degree: | IP68 |

Picture

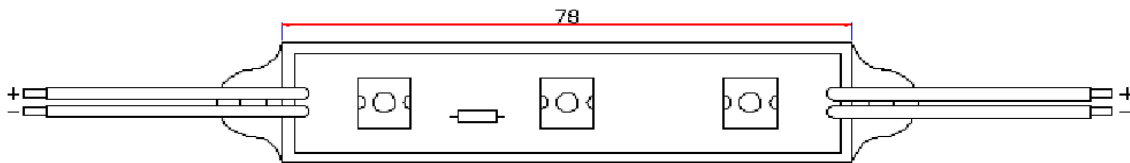

Waterproof Plastic Modul for Outside Application

Part No.: **M24007**

Customer:

| | | | | | | |
|---------|-------|-------|-----------|--------|-----------|------------|
| Drwaing | APPD. | CHKD. | Tolerance | Finish | DATE | 24.07.2009 |
| Harry | Jason | John | Wilson | Mason | Sheet No. | 1 from 4 |



EDCON[®]
COMPONENTS
 A MEMBER OF EDCON-GROUP

Packing Specification

Antistatic Polybag



| | |
|---|---------------|
| Waterproof Plastic Modul for Outside Application | |
| Part No.: | M24007 |
| Customer: | |
| DATE | 24.07.2009 |
| Sheet No. | 2 from 4 |

| | | | | |
|---------|-------|-------|-----------|--------|
| Drwaing | APPD. | CHKD. | Tolerance | Finish |
| Harry | Jason | John | Wilson | Mason |


www.edcon-components.com

on-components.com



EDCON[®]
COMPONENTS
 A MEMBER OF EDCON-GROUP

Color table curve

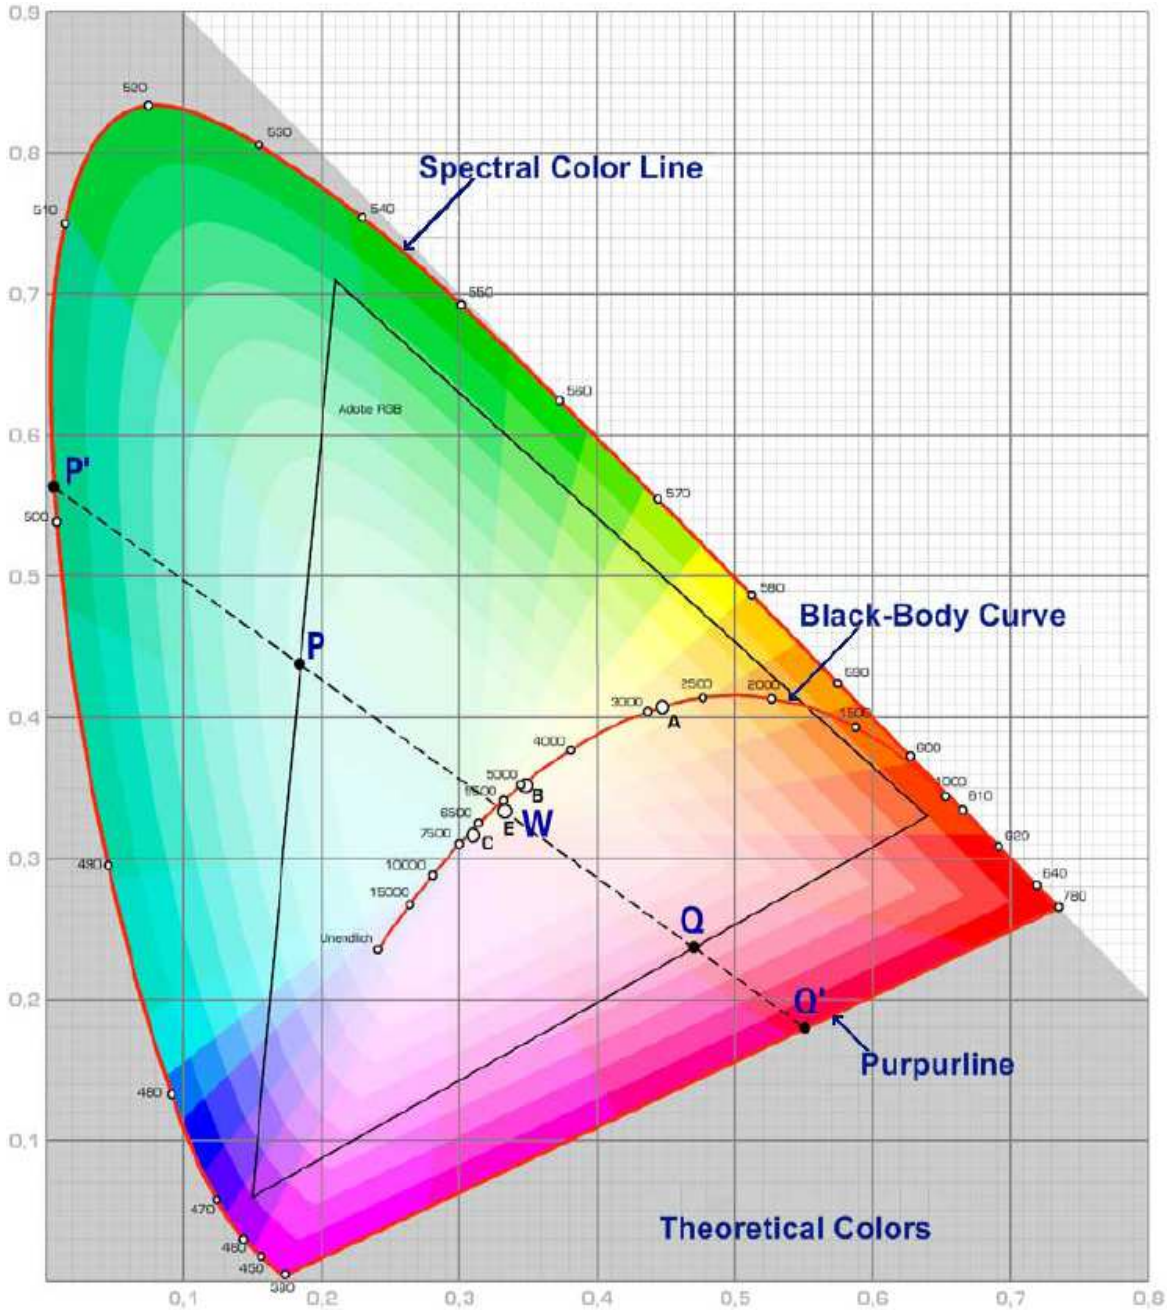

**Waterproof Platic Modul
 for Outside Application**

Part No.: **M24007**

Customer:

| | | | | | | |
|---------|-------|-------|-----------|--------|-----------|------------|
| Drwaing | APPD. | CHKD. | Tolerance | Finish | DATE | 24.07.2009 |
| Harry | Jason | John | Wilson | Mason | Sheet No. | 3 from 4 |

www.edcon-components.com

on-components.com

© by EDCON-COMPONENTS



Ordering Information

| | | | | |
|---------------|--------------|-----------|----------|--|
| Serie | Color of LED | Voltage | Packing | |
| M24007 | CW | 12 | B | |

| | | |
|-----------------------|-------------|---|
| CW= Cool White | 12= 12 Volt | B= Bulk (Standard) I= Individuell (Standard) |
| | 5= 5 Volt | |
| | 24= 24 Volt | |
| | | |
| | | |
| | | |

| | |
|---|---------------|
| Waterproof Plastic Modul for Outside Application | |
| Part No.: | M24007 |
| Customer: | |

| | | | | | | |
|---------|-------|-------|-----------|--------|-----------|------------|
| Drwaing | APPD. | CHKD. | Tolerance | Finish | DATE | 24.07.2009 |
| Harry | Jason | John | Wilson | Mason | Sheet No. | 4 from 4 |