



Applications


- Interior automotive lighting(dashboard backlight etc...)
- Optical indicators
- High Tech Lightning
- Security Parts
- Automotive Products

Technical LED inside

Size of LED	3PCS Super Flux LED
PCS	3
Waterproof	Yes
Case:	Plastic
Case Size Dimension:	30mm
Operating Current:	30mA per Module
Viewing Angle:	120°
Luminious Flux:	9 lm
Power Dissipation per Meter:	0,30 Watt
Protection degree:	IP68

Picture

Dimension Drawing

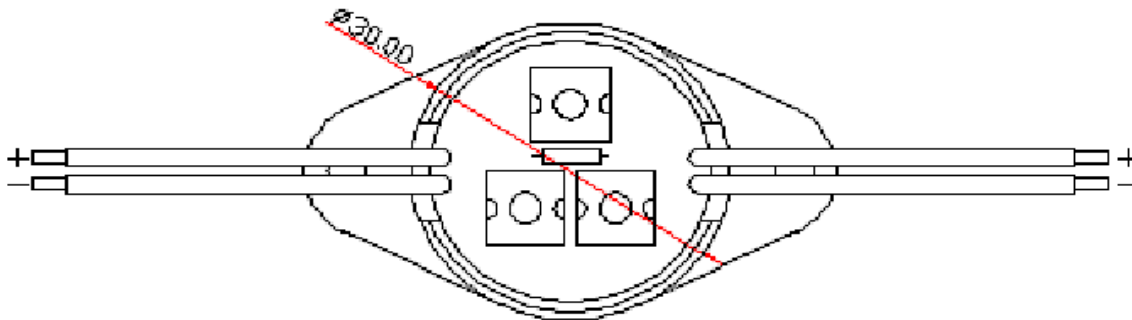

Waterproof Platic Modul for Outside Application

Part No.: **M24009**

Customer:

DATE 24.07.2009

Sheet No. 1 from 4

Drwaing	APPD.	CHKD.	Tolerance	Finish	DATE	24.07.2009
Harry	Jason	John	Wilson	Mason	Sheet No.	1 from 4



EDCON[®]
COMPONENTS
 A MEMBER OF EDCON-GROUP

Packing Specification

Antistatic Polybag



**Waterproof Plastic Modul
 for Outside Application**

Part No.: **M24009**

Customer: _____

Drwaing	APPD.	CHKD.	Tolerance	Finish	DATE	24.07.2009
Harry	Jason	John	Wilson	Mason	Sheet No.	2 from 4


www.edcon-components.com

on-components.com



EDCON[®]
COMPONENTS
 A MEMBER OF EDCON-GROUP

Color table curve

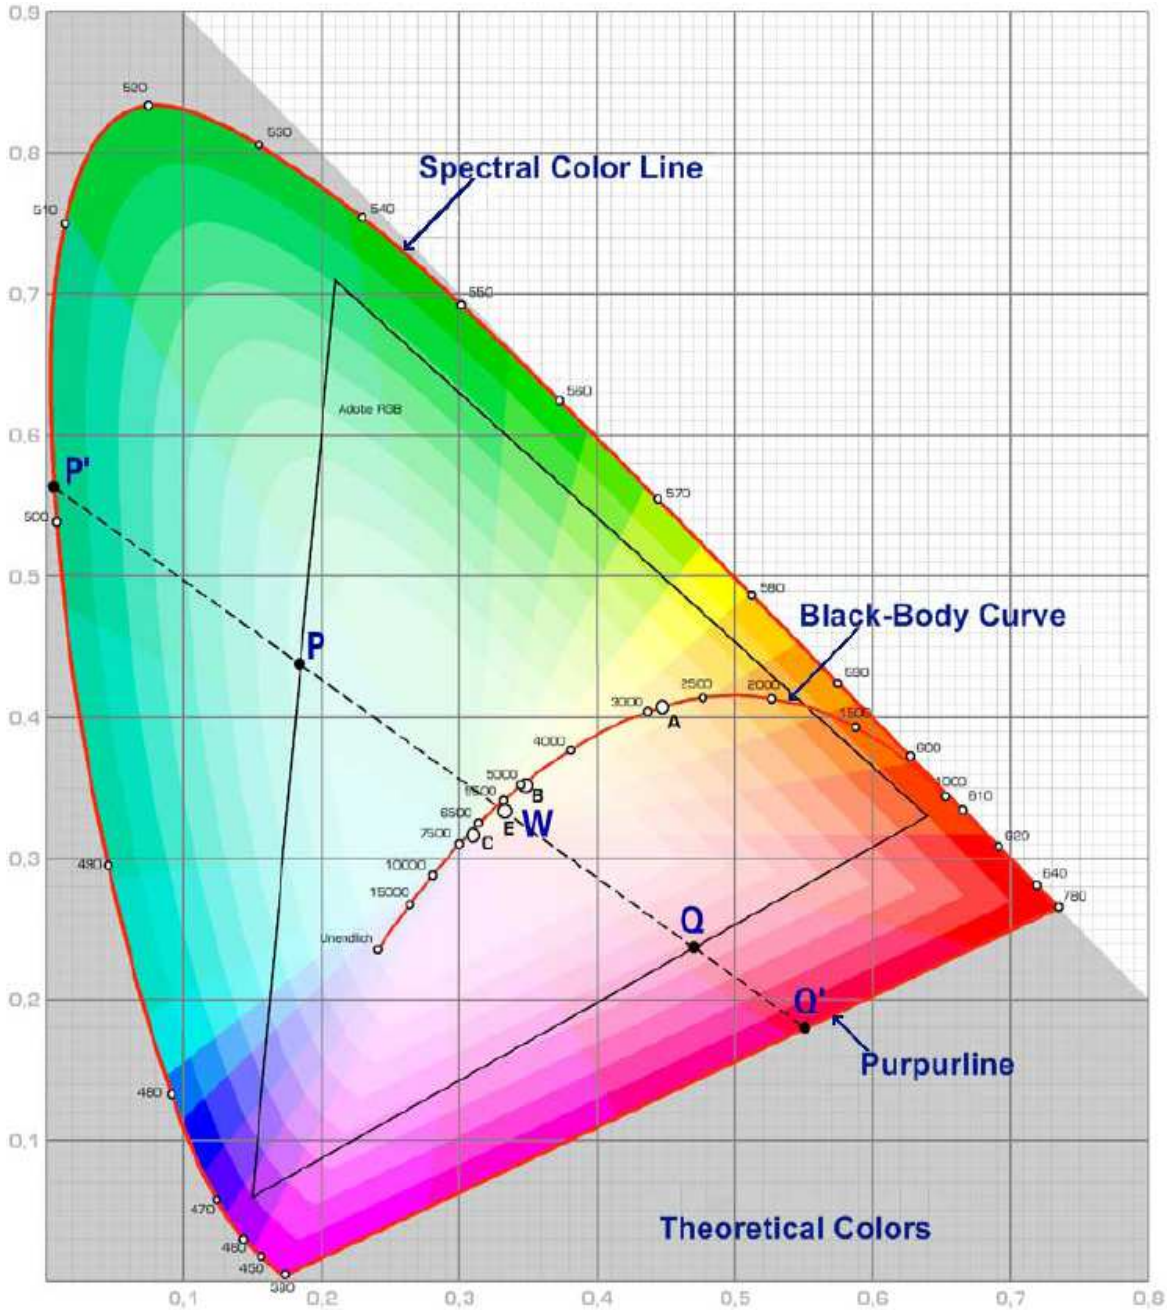

**Waterproof Plastic Modul
 for Outside Application**

Part No.: **M24009**

Customer:

Drwaing	APPD.	CHKD.	Tolerance	Finish	DATE	24.07.2009
Harry	Jason	John	Wilson	Mason	Sheet No.	3 from 4

www.edcon-components.com

on-components.com

© by EDCON-COMPONENTS



Ordering Information

Serie	Color of LED	Voltage	Packing
M24009	CW	12	B

CW= Cool White	12= 12 Volt (Standard)	B= Bulk (Standard) I= Individuell (Standard)
	5= 5 Volt	
	24= 24 Volt	

Waterproof Plastic Modul for Outside Application	
Part No.:	M24009
Customer:	

Drwaing	APPD.	CHKD.	Tolerance	Finish	DATE	24.07.2009
Harry	Jason	John	Wilson	Mason	Sheet No.	4 from 4