





Applications

- Interior automotive lighting(dashboard backlight etc...)
- Optical indicators
- High Tech Lightning
- Security Parts
- Automotive Products

Technical LED inside

Size of LED	5050 RGB LED
PCS	30PCS / 500mm
Waterproof	NO
Case:	NO CASE
Case Size Dimension:	500x10mm
Operating Current:	300mA per Lightbar
Viewing Angle:	120°
Luminious Flux:	B=95 / G=250 / R=125 lm
Power Dissipation per Meter:	3,6 Watt
Operating Temperature:	.-40°C to + 80°C

Drawing

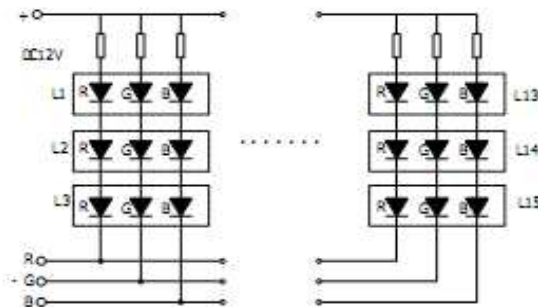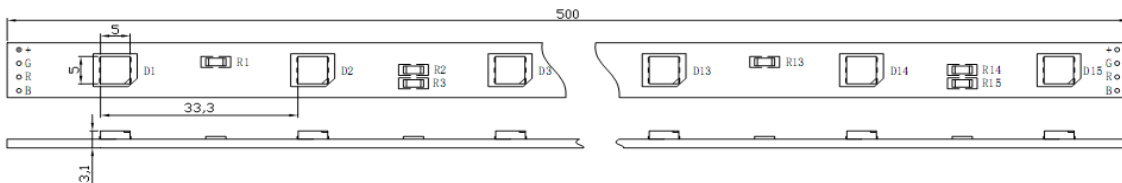

PCB lightbar Modul for Inside Application

Part No.: **M25003**

Customer:

Drawing	APPD.	CHKD.	Tolerance	Finish	DATE	24.07.2009
Harry	Jason	John	Wilson	Mason	Sheet No.	1 from 4



EDCON[®]
COMPONENTS
 A MEMBER OF EDCON-GROUP

Packing Specification

TUBE PACKING each PCS




PCB lightbar Modul for Inside Application	
Part No.:	M25003
Customer:	
DATE	24.07.2009
Sheet No.	2 from 4

Drawing	APPD.	CHKD.	Tolerance	Finish
Harry	Jason	John	Wilson	Mason




EDCON[®]
COMPONENTS
 A MEMBER OF EDCON-GROUP

Color table curve

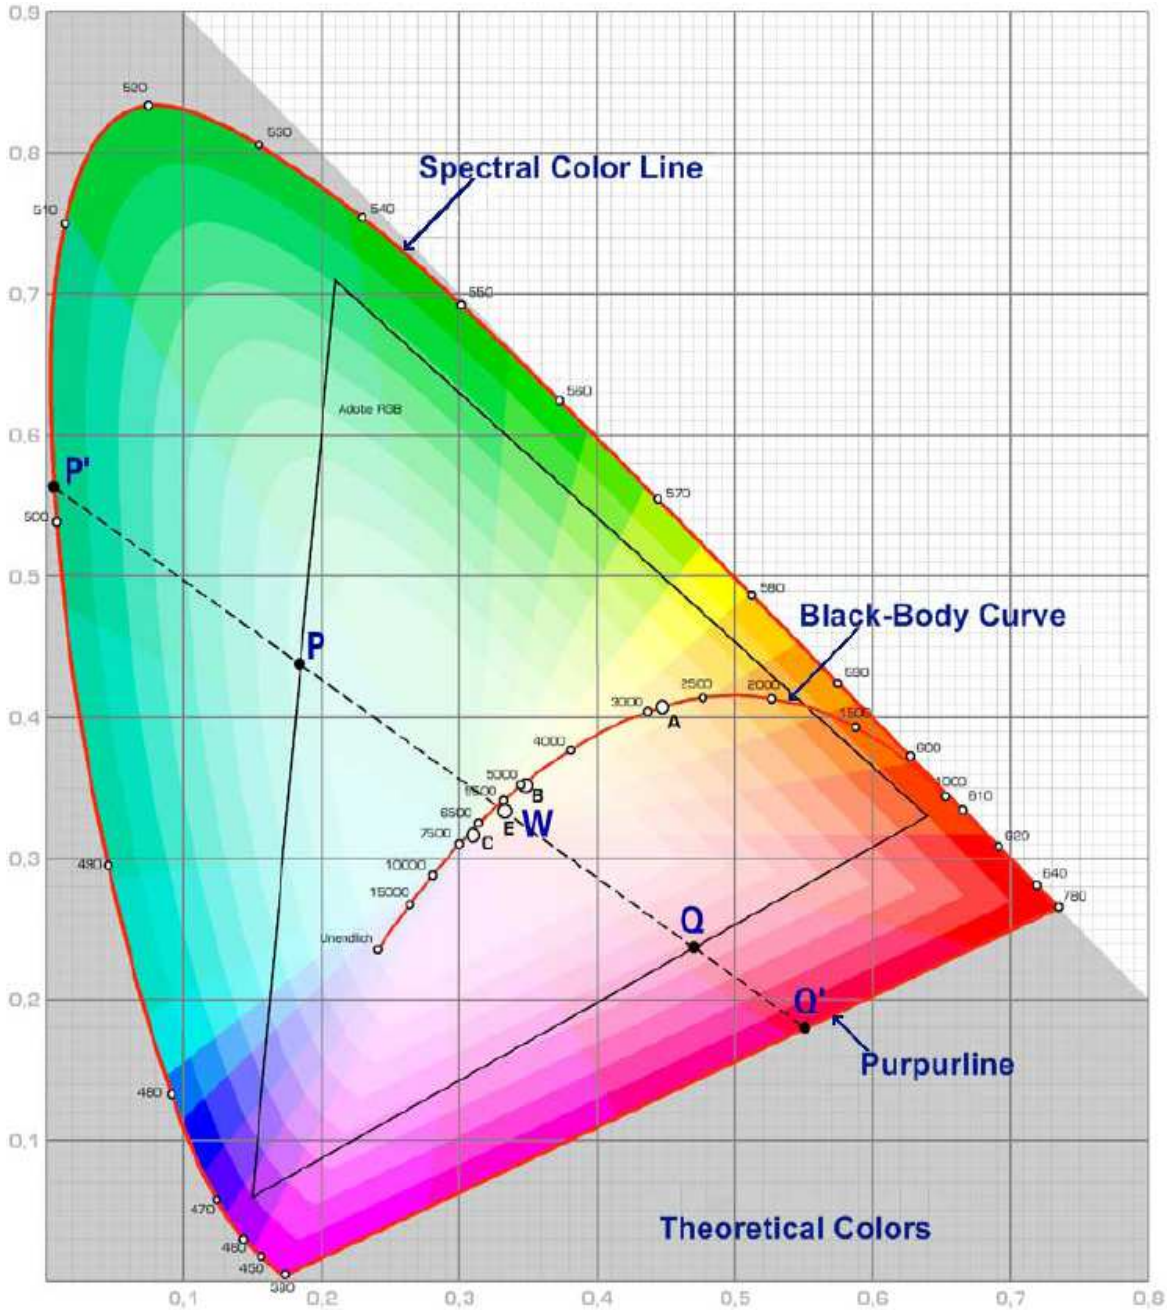

PCB lightbar Modul for Inside Application	
Part No.:	M25003
Customer:	

Drawing	APPD.	CHKD.	Tolerance	Finish	DATE	24.07.2009
Harry	Jason	John	Wilson	Mason	Sheet No.	3 from 4

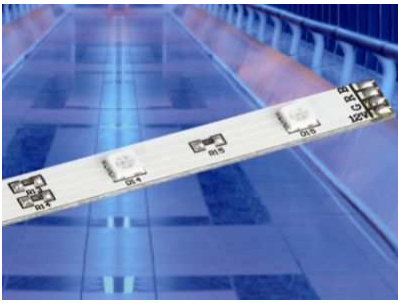

Ordering Information

Serie	Color of LED	Voltage	Packing	
M25003	RGB01	12	B	

RGB01	12= 12 Volt (Standard)	B= Bulk (Standard) I= Individuell (Standard)
	5= 5 Volt	
	24= 24 Volt	

Code	E-Color	Wavelength	Lumi. Flux	V.Angle
RGB01	Blue	475	95 lm	120°
	Green	525	250 lm	120°
	Red	630	125 lm	120°

PCB lightbar Modul for Inside Application	
Part No.:	M25003
Customer:	

Drawing	APPD.	CHKD.	Tolerance	Finish	DATE	24.07.2009
Harry	Jason	John	Wilson	Mason	Sheet No.	4 from 4