


EDCON-COMPONENTS



Technical Discription

STANDARD: 12Position
TYPE: U
CROSS SECTIONS: 6mm²
AREA: 1,00mm² ~ 4,0mm²
AMPERERE: max. 32A
VOLTS: 450V
MATERIAL : PA66 / Polyethelene
APPROVAL: VDE 40019763
COLOR: White, Nature, Black, Yellow, Blue, Light Gray

Ordering Informations

| Serie | No.o. Pos. | Material | W. Protector | Color | ROHS | Packing |
|----------------|----------------|---|----------------------------------|---|--|---|
| A15A020 | XX | PA | N | WH | R | ST10 |
| | 02 ~ 12 | PA= Nylon 66 PE= Poly ethelene | N= without Wire Protector | WH= White BK= Black NA= Nature BL= Blue YE= Yellow LG= Light Gr. | R= ROHS Conform N= NON ROHS Conform | ST10= Shrink Tube 10PCS BX101= BoX 100 PCS |


Connecting Terminal Block

Part No.: **A15A020**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 02.02.2009 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 1 from 2 |


Customer:

EDCON-COMPONENTS



Drawing

Technical Dimensions

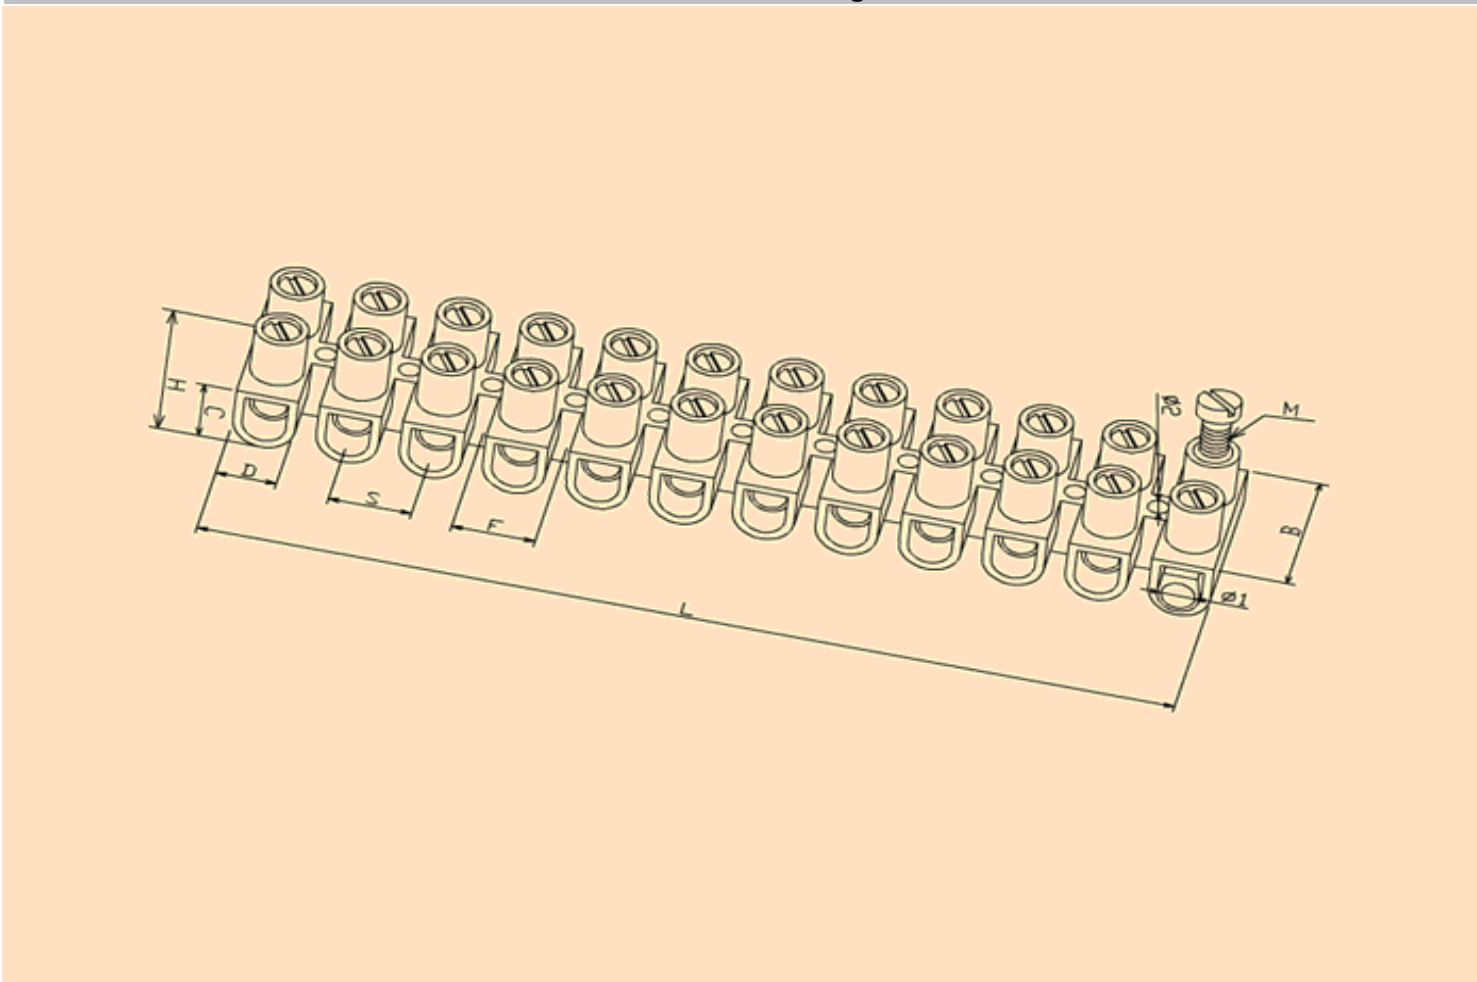

| Size (mm) | |
|-----------|-------|
| L | 113,8 |
| B | 16,0 |
| H | 14,1 |
| C | 8,0 |
| D | 6,4 |
| S | 10,0 |
| F | 9,8 |
| Ø1 | 3,2 |
| Ø2 | 2,8 |
| M | 3,0 |

Connecting Terminal Block

Part No.: **A15A020**

Customer:

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 02.02.2009 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 2 from 2 | |