



EDCON-COMPONENTS

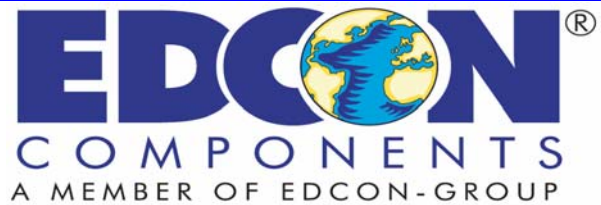

With outline size 6,2x6,2m
This surface mounting type keyboard switches are ideal for high density mounting
Permits reflow soldering
Available with ground terminal for electrostatic discharge

For use of operating electronic equipment like that audio , office equipment, communications apparatus, measuring instruments, TV sets VCR's etc.
For Cellular Phone.

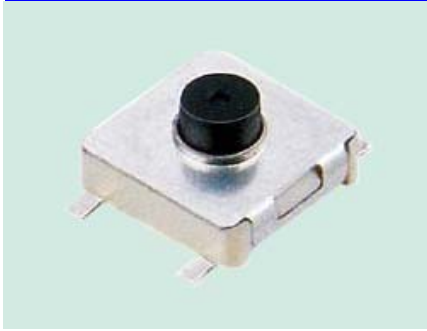

Rating:
Insulation Resistance:
Dielectric Strength:
Contact Resistance:
Operating Temperature:
Electrically Life:

50mA / 12VDC
100M Ohm min. (DC250V)
AC250V 50/60Hz for 1 Minute
100milli Ohm max. (initial)
-20°C ~ + 70°C
V= 100.000 cycles
J= 100.000 cycles
H= 50.000 cycles





www.edcon-components.com
email: info@edcon-components.com

Copyright by EDCON-COMPONENTS H. Schmitt 25.5.2009

EDCON-COMPONENTS



← Dimensions PCB Layout →

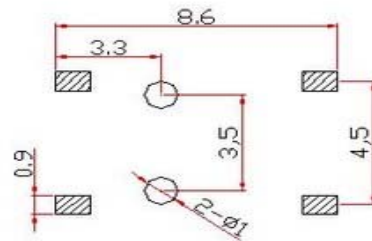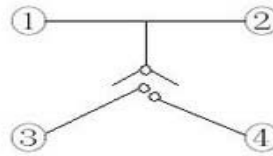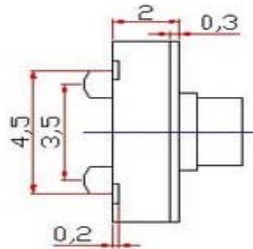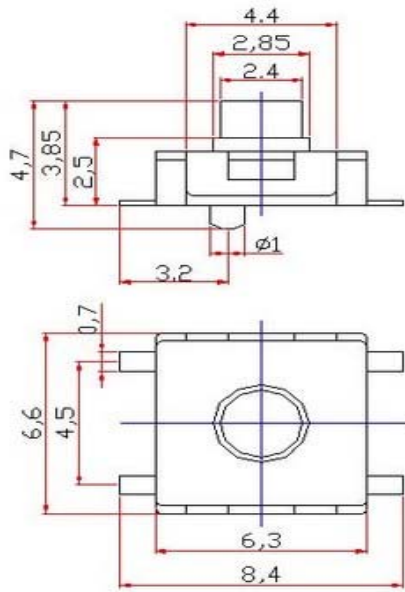

← Ordering Informations →

| Serie | Total Height | Operating force | Packing | | | |
|--------|--------------|---------------------------------------|------------------------------|--|--|--|
| Q11002 | 0 | V V= 130gr J= 160gr H= 250gr | TR B=Bulk TR=Tape/Reel | | | |

Q11002

www.edcon-components.com

email: info@edcon-components.com

Copyright by EDCON-COMPONENTS H. Schmitt 25.5.2009



Packing and Reel Specifications

Q11002